


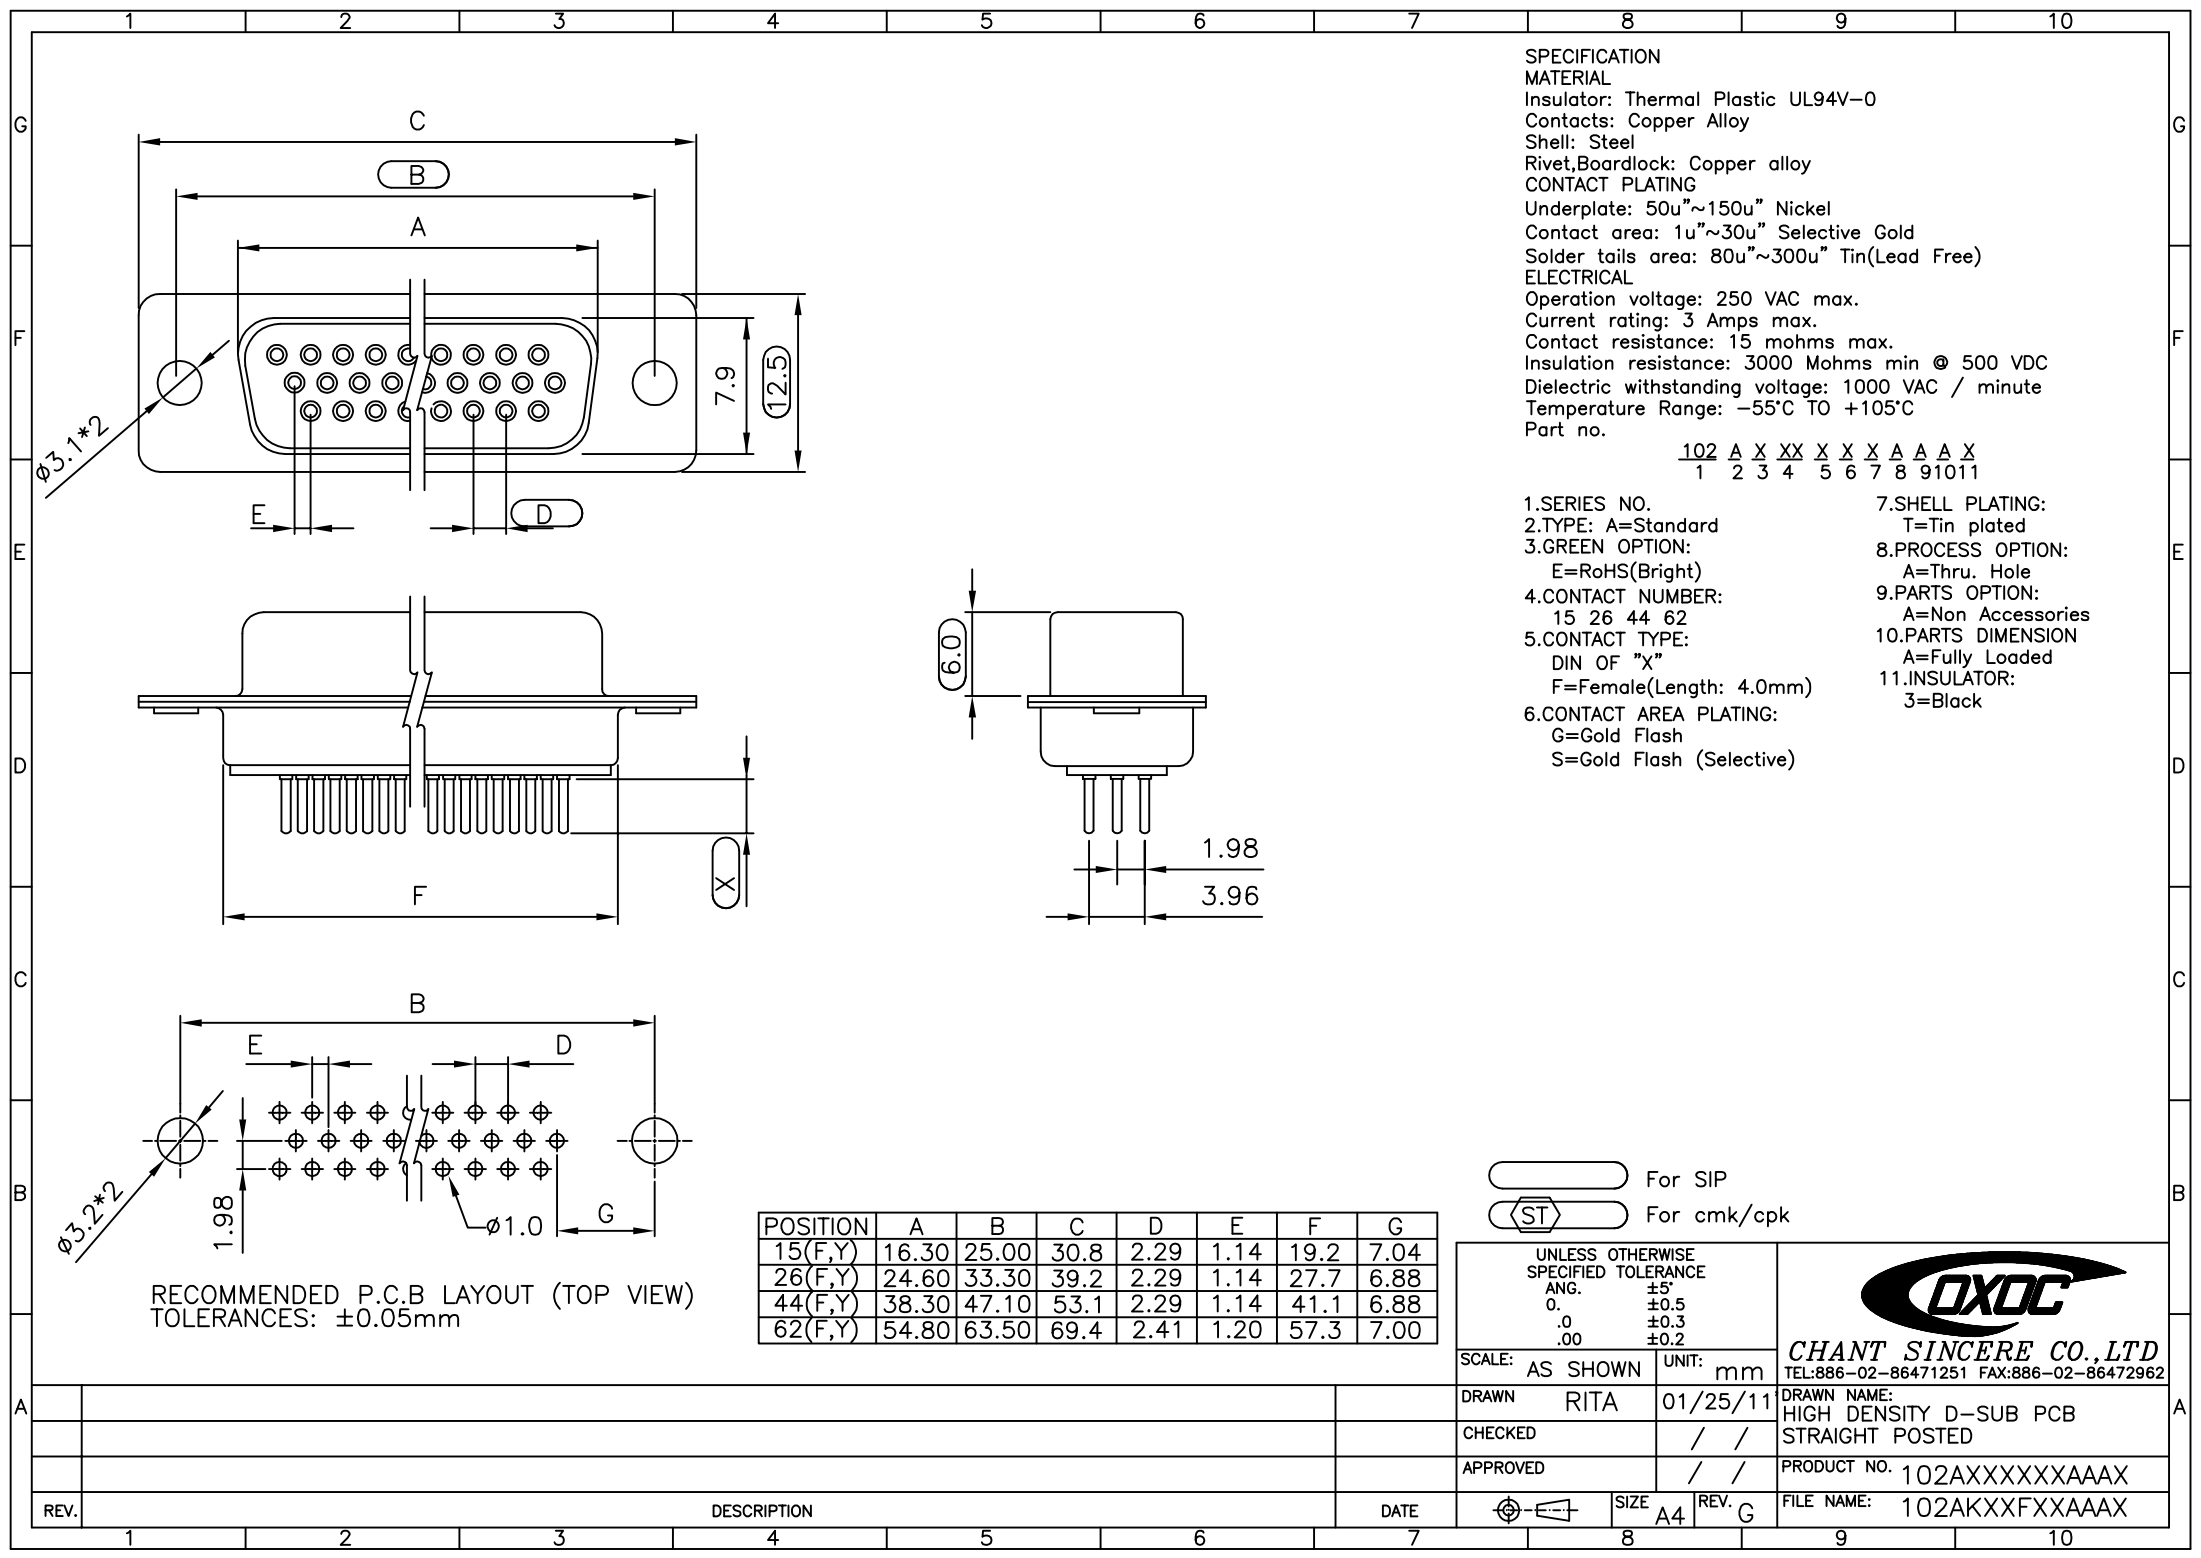

SPECIFICATION
MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Shell: Steel
Rivet,Boardlock: Copper alloy
CONTACT PLATING
Underplate: 50u"~150u" Nickel
Contact area: 1u"~30u" Selective Gold
Solder tails area: 80u"~300u" Tin(Lead Free)
ELECTRICAL
Operation voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 15 mohms max.
Insulation resistance: 3000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Temperature Range: -55°C TO +105°C
Part no.

102 A X XX X X A A A X
1 2 3 4 5 6 7 8 9 10 11

- 1.SERIES NO.

2.TYPE: A=Standard

3.GREEN OPTION:
E=RoHS(Bright)

4.CONTACT NUMBER:
15 26 44 62

5.CONTACT TYPE:
DIN OF "X"
F=Female(Length: 4.0mm)

6.CONTACT AREA PLATING:
G=Gold Flash
S=Gold Flash (Selective)
- 7.SHELL PLATING:
T=Tin plated

8.PROCESS OPTION:
A=Thru. Hole

9.PARTS OPTION:
A=Non Accessories

10.PARTS DIMENSION
A=Fully Loaded

11.INSULATOR:
3=Black

POSITION	A	B	C	D	E	F	G
15(F,Y)	16.30	25.00	30.8	2.29	1.14	19.2	7.04
26(F,Y)	24.60	33.30	39.2	2.29	1.14	27.7	6.88
44(F,Y)	38.30	47.10	53.1	2.29	1.14	41.1	6.88
62(F,Y)	54.80	63.50	69.4	2.41	1.20	57.3	7.00

For SIP
 For cmk/cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: AS SHOWN UNIT: mm

DRAWN RITA 01/25/11

CHECKED / /

APPROVED / /

CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962
DRAWN NAME:
HIGH DENSITY D-SUB PCB
STRAIGHT POSTED
PRODUCT NO. 102AXXXXXXAAAX
FILE NAME: 102AKXXFXXAAAX

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	G	102AKXXFXXAAAX