


EDGE OF P.C.B. BOARD
RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

PARTS DIMENSION TABLE

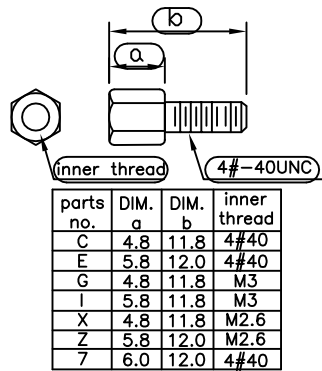

POS.	A	B	C	E
15	30.80	24.99	16.30	2.29
26	39.2	33.32	23.20	2.29
44	53.10	47.04	36.30	2.29
62	70.00	63.50	54.8	2.41

MATERIAL:
INSULATOR:PBT+30% GLASS FIBER(UL94V-0).
CONTACT: BRASS.
CONTACTPLATED:
Underplate: 40u" Min. Nickel
Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 80u" Min. Tin(Lead Free) or Gold Flash
SHELL:STEEL,N=40u" NICKEL or T=40u" Tin over 40u" Cu
SPECIFICATION:
CURRENT RATE:5 AMPS
INSULATOR RESISTANCE:1000M MIN.AT 500V DC
DIELECTRIC STRENGTH:1000V PER
OPERATION TEMPERATURE:-55C TO+105C

PART NO.

$\frac{103}{1} \frac{A}{2} \frac{E}{3} \frac{XX}{4} \frac{F}{5} \frac{X}{6} \frac{X}{7} \frac{B}{8} \frac{B}{9} \frac{X}{10} \frac{3}{11}$

- SERIES NO.
- TYPE: A=Standard
- GREEN OPTION:
E=RoHS(Bright)
- CONTACT NUMBER:
15 26 44 62
- CONTACT TYPE:
F=Female
- CONTACT PLATING:
G=Gold Flash Over All
S=Gold Flash (Selective)
C=15u" Gold (Selective)
D=30u" Gold (Selective)
1=Gold Flash/0.8u" Gold
- SHELL PLATING:
T=Tin Plated
- PROCESS OPTION:
B=Rivet W/Boardlock
- PARTS OPTION:
B=4#40 Thread Rivet
- PARTS DIMENSION
C=Fixed Hex-Screws(4.8*11.8mm)
- INSULATOR COLOR:
3=Black

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±3°
0. ±0.30
.0 ±0.20
.00 ±0.15

SCALE: AS SHOWN UNIT: mm

DRAWN PEARL 06/20/14

CHECKED / /

APPROVED / /

SIZE A4 REV. B



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: D-SUB PCB RIGHT ANGLE FEMALE

PRODUCT NO. 103AEXXFFXXBXX3

FILE NAME: 103AEXXFFXXBXX3(H03)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		