

NOTES  
 MATERIALS: Phosphor Bronze  
 BURR: 0.1mm Max. On Contact Area.  
 CAMBER: 0.1mm Max. Damage: Na.  
 DEFORMATION: 0.05mm Max.  
 UNDERPLATE: 50nm Nickel  
 CONTACT AREA: 1mm<sup>2</sup>~30mm<sup>2</sup> Selective Gold  
 SOLDER TAILS AREA: 100mm<sup>2</sup> Tin (Lead Free)  
 PART NO.


105 A X 00 B X X A B 0 X  
 1 2 3 4 5 6 7 8 9 10 11

- 1.SERIES NO. 105
- 2.TYPE. A=Standard
- 3.GREEN OPTION: E=RoHS(Bright plated)
- 4.FILL IT WITH "00"
- 5.CONTACT TYPE. B=Phosphor Bronze
- 6.CONTACT PLATING. S=Gold Flash (Selective)
- 6.CONTACT OPTION. 0=Left Feed Reel (Crimp Face Out) Standard
- 7.WIRE OPTION. A=Suitable For 26~30 AWG
- 8.MATERIAL. B=Phosphor Bronze
- 9.FILL IT "WITH "0"
- 10.PACKING. A=5K/Reel

Plating accd. to The Requirement  
 Au/Ni thickness measurement points  
 (inside contact points)


UNLESS OTHERWISE SPECIFIED TOLERANCE		 <b>CHANT SINCERE CO., LTD</b> TEL:886-02-86471251 FAX:886-02-86472962
ANG.	±5°	
0.	±0.5	DRAWN NAME: 105A 磷銅母端(鐵製彈片) 1/2 PRODUCT NO. 105AX00BXXABOX FILE NAME: 105AK00BXXABOX(Q6)
.0	±0.3	
.00	±0.2	
SCALE: AS SHOWN	UNIT: mm	
DRAWN	Shian	08/17/2017
CHECKED	/	/
APPROVED	/	/
DATE	SIZE	REV.
	A4	G

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		

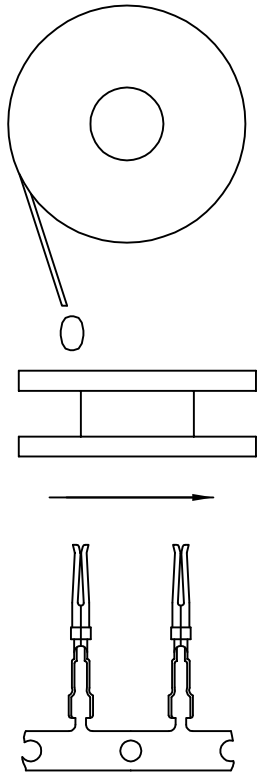


左手上料

1. 料帶朝下.
2. 逆時針方向.
3. Solder 朝外.

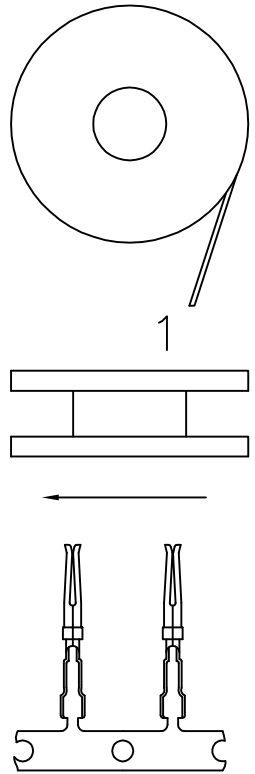


右手上料

1. 料帶朝下.
2. 順時針方向.
3. Solder 朝外.

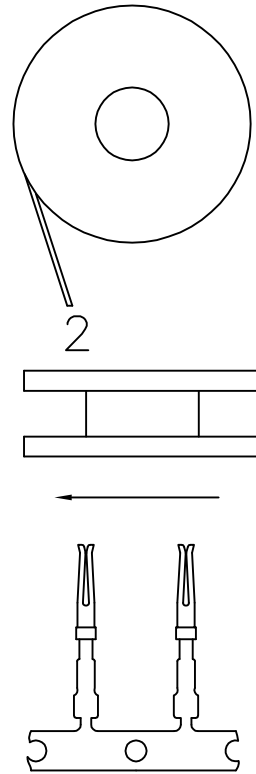


左手上料

1. 料帶朝下.
2. 逆時針方向.
3. Solder 朝內.

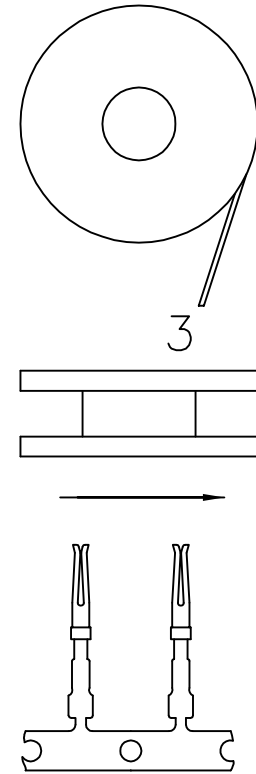

右手上料

1. 料帶朝下.
2. 順時針方向.
3. Solder 朝內.

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <b>CHANT SINCERE CO., LTD</b> TEL:886-02-86471251 FAX:886-02-86472962	
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2	SCALE: AS SHOWN	UNIT: mm
DRAWN	Shian	08/17/2017	DRAWN NAME:
CHECKED	/ /		105A 磷銅母端(鐵製彈片) 2/2
APPROVED	/ /		PRODUCT NO. 105AX00BXXABOX
REV.			FILE NAME: 105AK00BXXABOX(Q6)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	G
2				
3				
4				
5				
6				
7				
8				
9				
10				