

RoHS
compliant




SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: HIGH TEM, THERMAL PLASTIC , RATED UL94V-0
2. CONTACTS: COPPER ALLOY
 UNDERPLATE: 40u"~100u" NI
 CONTACT AREA: SELECTIVE GOLD FLASH
3. METAL PARTS: STEEL WITH NI PLATING
4. CABLE: PVC, BLACK


ELECTRICAL CHARACTERISTIC:
1. DIELECTRIC WITHSTANDING VOLTAGE: 30 V-AC FOR 1 MINUTE.
2. INSULATION RESISTANCE: 100 MΩ MIN. AT 500 V DC
3. CURRENT RATING: 1 A MAX.
4. AWG SINGAL LINE: 1P*28 AWG+24AWG*2C OD=4.5±0.15 mm

ENVIRONMENT:
1. TEMPERATURE RANGE: -20°C TO +80°C

NOTE:
DEGREE OF PROTECTION: IP 67

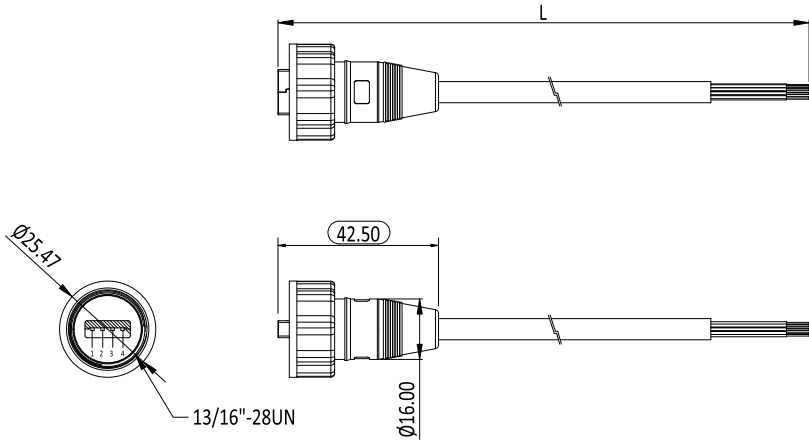

SHELL	DRAIN	28 AWG	5
4	BLACK	24 AWG	4
3	GREEN	28 AWG	3
2	WHITE	28 AWG	2
1	RED	24 AWG	1
USB CONN.	WIRE COLOR	AWG	5PIN CONN.
PIN OUT			

1	13152010010	CW30513ACA01E1M0	1000±10mm		
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE	
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.50 0 ±0.30 .00 ±0.20		 SIP	 CHANT SINCERE CO.,LTD		
		 Cmk Cpk			
		SCALE: AS SHOWN			UNIT: mm
		DRAWN: BENSON_ZHENG			04 Feb 2025
CHECKED: PEARL_HUNG		04 Feb 2025	TITLE: PDR-13104 USB 2.0 A TYPE PLUG WATERPROOF WITH CABLE		
APPROVED: PEARL_HUNG		04 Feb 2025			
			PART NO. 1315201XXXX	P	
	SIZE A4	SHEET 1/1	REV. B	CODE: GC	CUSTOMER:
7		8	9		10

	B	ECN-2501086(KIRA)NEW P/N	22JAN2025
	A	ECN-1408091(NAOMI)(PDR-13104)	16OCT2014
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6		