

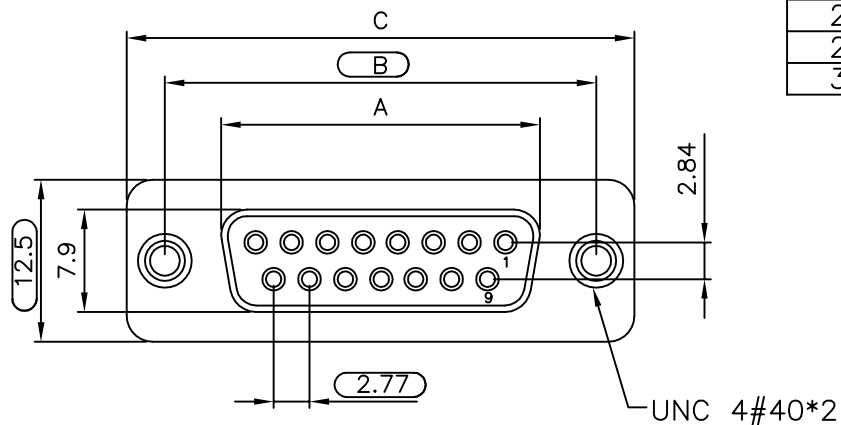



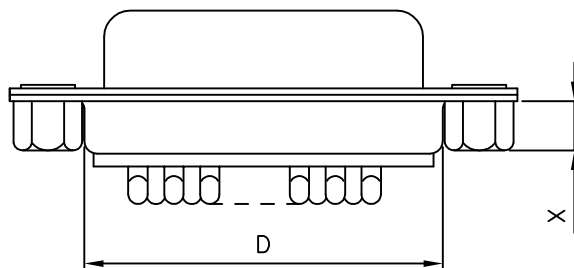

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
19F	30.00	38.86	44.8	32.8
23F	35.30	44.30	50.3	38.3
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

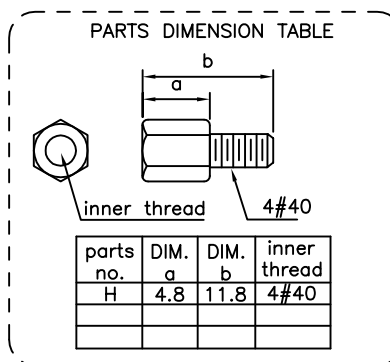

PROCESS OPTION
DIM FOR "X"

C	3.8mm
D	5.8mm
K	2.5mm

SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50m Nickel

Contact Area: 1m~50m Selective Gold

Solder Tails Area: 100m Tin/Lead(Brighten Tin)or

100m Tin/Lead Free(Brighten Tin/Matte Tin)

ELECTRICAL

Operation Voltage: 250 VAC Max.

Current Rating: 3 Amps Max.

Contact Resistance: 15 mohms Max.

Insulation Resistance: 3000 Mohms Min @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / Minute

Operating Temperature: -55°C To +105°C

PART NO.

201 A X XX X X X X E A X
1 2 3 4 5 6 7 8 9 10 11

1.SERIES NO.

2.TYPE: A=Standard

3.GREEN OPTION:

E=RoHS

4.CONTACT NUMBER:

09 15 25 37

5.CONTACT TYPE:

F=Female(Brass)

6.CONTACT AREA PLATING:

G=Gold Flash

S=Selective Gold

7.SHELL PLATING:

T=Tin Plated

8.PROCESS OPTION

DIM FOR "X"

C=3.8mm Open Hex Rivet

9.PARTS OPTION

E=Rear Rivet

10.CONTACT INSERTING OPTION

A=Fully Loaded

11.INSULATOR COLOR

3=Black

For SIP
For cmk/cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962		
ANG.	±5°			
0.	±0.5			
.0	±0.3			
.00	±0.2			
SCALE: AS SHOWN		UNIT: mm	DRAWN NAME: D-SUB SOLDER	
DRAWN	RITA	07/13/10		
CHECKED		/ /		
APPROVED		/ /		
		SIZE A4	REV. E	PRODUCT NO. 201AXXXXXXXEAX
				FILE NAME: 201AKXXFXXCEAX

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	E