


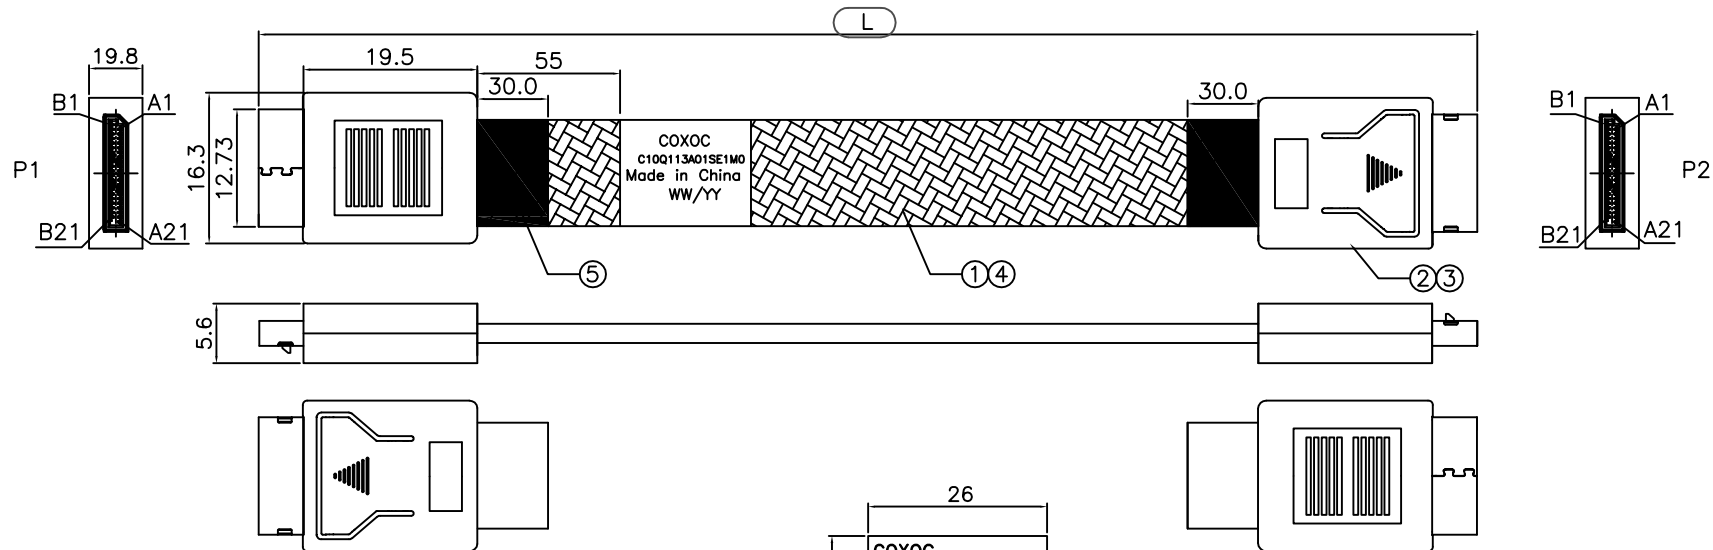

NOTES:

1.ELECTRONIC TEST:

- 4.1.100% OPEN; SHORT OR MISWIRE TEST;
- 4.2.INSULATION RESISTANCE:20M Ω(MIN);
- 4.3.CONTACT RESISTANCE:10Ω(MAX);
- 4.4.HI-POT TEST:DC300V/10ms

2.R2E=RoHS+RoHS2.0+REACH

3.DATA RATE:12Gbps

4.IMPEDANCE:85 Ω

5.MEET SFF-8611 SPECIFICATION

PART NO.

C10 Q1 1 3 A01S E XXX
1 2 3 4 5 6 7

1.SERIES NO.

C10=SATA TYPE

2.CONNECTOR OPTION

Q1=OCULINK/OCULINK

3.CONNECTOR TYPE

1=M/M

4.CABLE COLOR.

3=Black

5.TYPE.

6.GREEN OPTION:

E=RoHS

7.LENGTH NO.

30C=300±30mm 35C=350±30mm
43C=430±30mm 70C=700±30mm
91C=910±30mm 1M0=1000±30mm

6	LABEL	Label 50*26mm
5	TYPE	BLACK ACETATE CLOTH TAPE
4	N.B.T	NYLON BRAIDED TUBE BLACK
3	PE	Transparence PE
2	Conn	OCULINK CONN+SHELL+LATCH
1	Cable	UL20744 #32x4P+ #32x5C
NO	Title	Description

For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
0.	±		
.0	±		
.00	±		
SCALE:	AS SHOWN	UNIT:	mm
DRAWN	SUNNY	12/10/2020	Title:
CHECKED			OCuLink to OCuLink CABLE
APPROVED			Part NO. C10Q113A01SEXXX
DATE	12/10/2020	Code: GB	Customer:

Zone	Revision	DESCRIPTION	DATE	SIZE	REV.	A	1/3
1	A	ECN-20A013(Wayne)	12/10/2020	A4	A		

1	2	3	4	5	6	7	8	9	10
G									G
F									F
E									E
D									D
C									C
B									B
A									A
Pin Out									
P1		P2		P1		P2			
POWER3.3VACT RX	A1	NC	B1	RESERVED	RESERVED	B1	NC	A1	POWER3.3VACT RX
GND	A2		B2	GND	GND	B2		A2	GND
PERP0	A3		B3	PETP0	PETP0	B3		A3	PERP0
PERN0	A4		B4	PETN0	PETN0	B4		A4	PERN0
GND	A5		B5	GND	GND	B5		A5	GND
PERP1	A6		B6	PETP1	PETP1	B6		A6	PERP1
PERN1	A7		B7	PETN1	PETN1	B7		A7	PERN1
GND	A8		B8	GND	GND	B8		A8	GND
BP TYPE	A9		B9	BP TYPE	2 WIRE CLOCK	B9		A9	2 WIRE CLOCK
CWAKE#	A10		B10	CWAKE#	2 WIRE DATA	B10		A10	2 WIRE DATA
GROUND	A11		B11	GND	GND	B11		A11	GND
VSP	A12		B12	VSP	PERST#	B12		A12	PERST#
VSP	A13		B13	VSP	CPRSNT#	B13		A13	CPRSNT#
GND	A14		B14	GND	GND	B14		A14	GND
PERP2	A15		B15	PETP2	PETP2	B15		A15	PERP2
PERN2	A16		B16	PETN2	PETN2	B16		A16	PERN2
GND	A17		B17	GND	GND	B17		A17	GND
PERP3	A18		B18	PETP3	PETP3	B18		A18	PERP3
PERN3	A19		B19	PETN3	PETN3	B19		A19	PERN3
GND	A20		B20	GND	GND	B20		A20	GND
RESERVED	A21	NC	B21	POWER3.3VACT TX	POWER3.3VACT TX	B21	NC	A21	RESERVED
UNLESS OTHERWISE SPECIFIED TOLERANCE									
0. ± .0 ± .00 ±									
SCALE: AS SHOWN						UNIT: mm			
DRAWN sunny						12/10/2020			
CHECKED						Title:			
APPROVED						OCuLink to OCuLink CABLE			
12/10/2020						Part NO. C10Q113A01SEXXX			
Zone Revision						Code: GB			
DESCRIPTION						Customer:			
1	2	3	4	5	6	7	8	9	10



CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN UNIT: mm

DRAWN sunny 12/10/2020

CHECKED

APPROVED

12/10/2020


Title: OCuLink to OCuLink CABLE 2/3

Part NO. C10Q113A01SEXXX

Code: GB Customer:




C10Q113A01SE50C & 70C

繞線尺寸

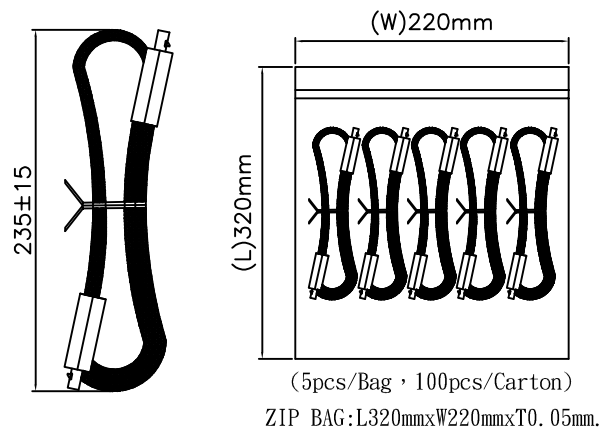


C10Q113A01SE30C

繞線尺寸

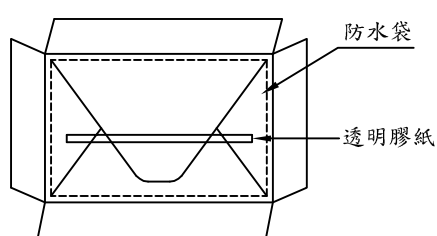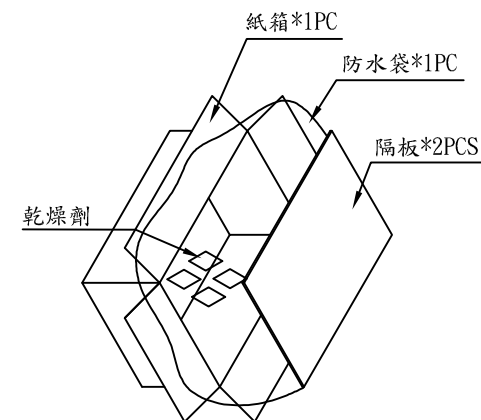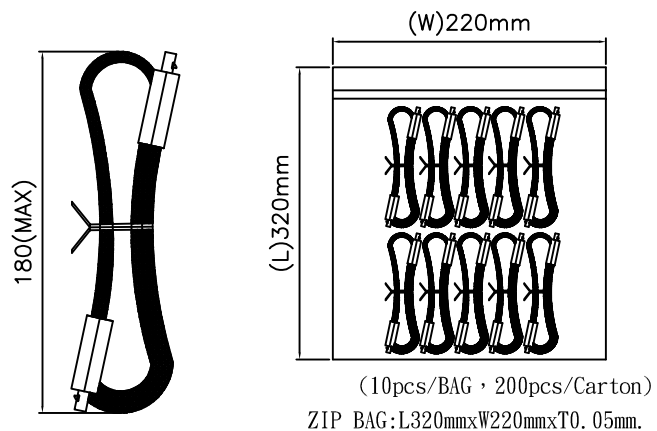

(裝好產品後, 防水袋需用透明膠紙封口)



(外箱: 457*298*228mm 材質: K=K)

PO NO:
ITEM NO:
Q'TY: PCS
N.W.: KGS
G.W.: KGS
MEAS: 1.1

(外箱側唛視圖)

包裝說明:

- 成品單PCS繞成"8字"形, 尺寸參考圖面敘述。
- 紫線帶繫於"8字"中間後, 將產品同方向放入夾鏈袋內, 數量參考圖示敘述。
- 外箱先封好底部, 套上防水袋, 底部放1pcs隔板, 將裝好的PE袋平放入箱內, 數量如圖所示, 頂部再放1PCS 隔板, 防水袋用透明膠布封上, 再封上外箱。

UNLESS OTHERWISE SPECIFIED TOLERANCE			
0.	±		
.0	±		
.00	±		
SCALE:	AS SHOWN	UNIT:	mm
DRAWN	SUNNY	12/10/2020	Title:
CHECKED			OCuLink to OCuLink CABLE
APPROVED			Part NO. C10Q113A01SEXXX
DATE			Code: GB
			Customer:

Zone	Revision	DESCRIPTION	DATE	SIZE	REV.	Code	Customer
	A	ECN-20A013(Wayne)	12/10/2020	A4	A	GB	



CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962