


parts no.	DIM. a	DIM. b	inner thread
F	5.0	10.0	4#40
H	4.8	11.8	4#40

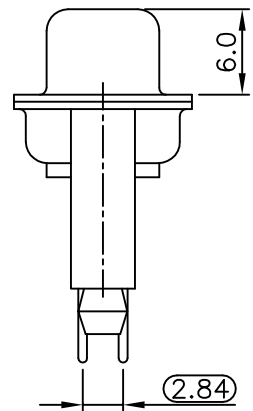

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
19F	30.00	38.86	44.8	32.8
23F	35.30	44.30	50.3	38.3
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Shell: Steel
 Rivet, Boardlock: Copper alloy
CONTACT PLATING
 Underplated: 1u"~30u" Selective Gold Over 50u"~100u" Nickel
ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C
 Part no.

204 A X XX F X X X X X X
 1 2 3 4 5 6 7 8 9 10 11

- 1. SERIES NO.
- 2. TYPE
A=Standard
- 3. GREEN OPTION
E=RoHS
- 4. CONTACT NUMBER:
09 15 25 37
- 5. CONTACT TYPE:
F=Female
- 6. CONTACT PLATING:
G=Gold Flash
- 7. SHELL PLATING:
T=Tin
- 8. PROCESS OPTION:
DIM. OF "X"
I=5.8mm 180°(Z) Rivet
- 9. PARTS OPTION:
E=Rear Rivet
- 10. CONTACT LENGTH:
DIM. OF "Y"
E=13.0mm
- 11. COLOR:
3=Black

PROCESS OPTION
DIM. FOR "X":

I	5.8mm
W	11.9mm
M	12.6mm
2	10.0mm

CONTACT LENGTH
DIM. FOR "Y":

E	13.0mm
F	9.5mm

UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.	±0.5
.0	±0.3
.00	±0.2

SCALE: AS SHOWN	UNIT: mm
DRAWN CHERRY	09/24/08
CHECKED	/ /
APPROVED	/ /
SIZE A4	REV. C



CHANT SINCERE CO., LTD
 TEL: 886-02-86471251 FAX: 886-02-86472962

DRAWN NAME: D-SUB PCB STRAIGHT MACHINED WIRE WRAP
 PRODUCT NO. 204AXXXFXXXXXX
 FILE NAME: 204AJXXFXXIEX

REV.	DESCRIPTION	DATE