


RECOMMENDED P.C.B LAYOUT (TOP VIEW)  
TOLERANCES: ±0.05mm

**PARTS DIMENSION TABLE**

parts no.	DIM. a	DIM. b	inner thread
B	4.8	11.8	4#40
D	5.8	12.0	4#40

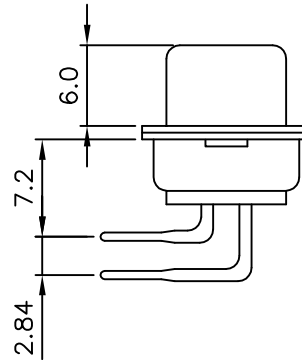

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
19F	30.00	38.86	44.8	32.8
23F	35.30	44.30	50.3	38.3
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

**SPECIFICATION MATERIAL**

Insulator: Thermal Plastic UL94V-0  
 Contacts: Copper Alloy  
 Shell: Stainless Steel  
 Rivet,Boardlock: Copper Alloy  
**CONTACT PLATING**  
 Gold Flash  
**ELECTRICAL**  
 Operation Voltage: 250 VAC Max.  
 Current Rating: 3 Amps Max.  
 Contact Resistance: 15 mohms Max.  
 Insulation Resistance: 3000 Mohms Min. @ 500 VDC  
 Dielectric Withstanding Voltage: 1000 VAC / minute  
 Operating Temperature: -55°C to +105°C

PART NO.

207 A X XX F X X A X A X  
 1 2 3 4 5 6 7 8 9 10 11

- |                                    |                    |
|------------------------------------|--------------------|
| 1.SERIES NO.                       | 7.SHELL PLATING:   |
| 2.TYPE: A=Standard                 | T=Tin Plated       |
| 3.ENVIRONMENT PROTECTION MATERIAL. | 8.PROCESS OPTION:  |
| E=RoHS                             | A=W/O Bracket      |
| 4.CONTACT NUMBER:                  | 9.PARTS OPTION:    |
| 09 15 25 37                        | A=Non Accessories  |
| 5.CONTACT TYPE:                    | 10.PARTS DIMENSION |
| F=Female                           | A=Fully Loaded     |
| 6.CONTACT AREA PLATING:            | 11.INSULATOR:      |
| G=Gold Flash                       | 3=Black            |

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5
0.	±0.5
.0	±0.3
.00	±0.2
SCALE: AS SHOWN	UNIT: mm
DRAWN TERRY	06/13/05
CHECKED	/ /
APPROVED	/ /



**CHANT SINCERE CO.,LTD**  
 TEL:886-02-86471251 FAX:886-02-86472962  
 DRAWN NAME:  
 D-SUB PCB RIGHT ANGLE W/O  
 REAR COVER FOOTPRINT: 7.2mm  
 PRODUCT NO. 207AXXXFXXAXAX  
 FILE NAME: 207AEXXFXXAAAX

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	C