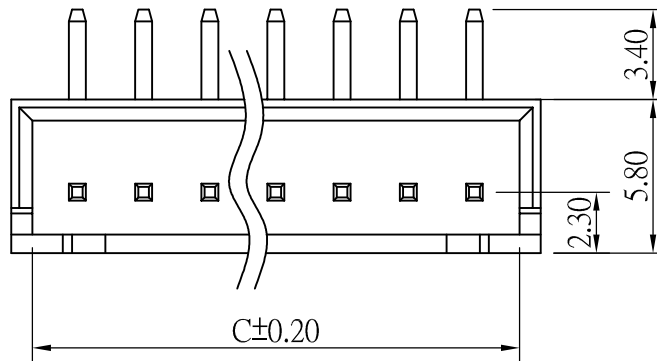



P.C.B. LAYOUT


Mate with 312A(B20X)
Insulator: Nylon 6/6 UL 94V-2
Color: White
Conductor: Brass/Tin plated

PART NO.



311 A E XX M A T B2 R 3 D 1
1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|-------------------|--------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE D=DIP | B2=2.5mm |
| 3.GREEN OPTION | 9.CONTACT OPTION |
| E=RoHS | R=Right Angle |
| 4.CONTACT NO. | 10.PROCESS OPTION |
| 02~16 | 3=TYPE 3 |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| M=Male | D=Bag |
| 6.ROW TYPE | 12.INSULATOR COLOR |
| A=Single Row | 1=White |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

POSITION	Dim A	Dim B	Dim C
2	2.50	7.5	5.90
3	5.00	10.0	8.40
4	7.50	12.5	10.90
5	10.00	15.0	13.40
6	12.50	17.5	15.90
7	15.00	20.0	18.40
8	17.50	22.5	20.90
9	20.00	25.0	23.40
10	22.50	27.5	25.90
11	25.00	30.0	28.40
12	27.50	32.5	30.90
13	30.00	35.0	33.40
14	32.50	37.5	35.90
15	35.00	40.0	38.40
16	37.50	42.5	40.90

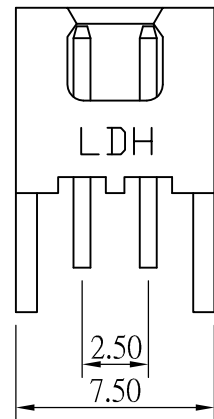

2PIN

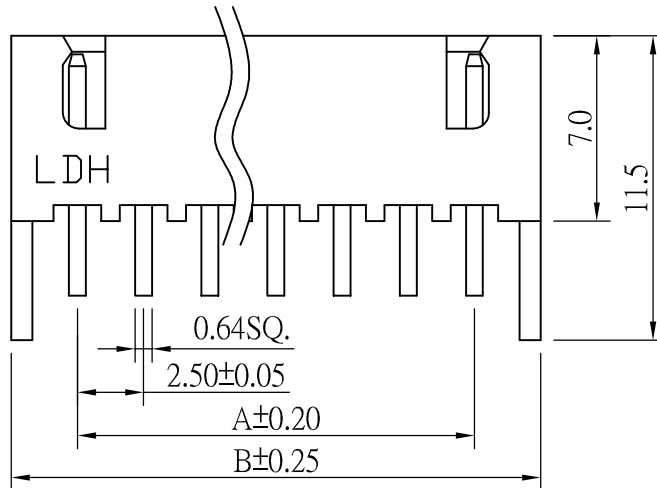

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
X' ±2			
.0 ±0.30			
.00 ±0.20			
.000 ±0.10		SCALE: AS SHOWN UNIT: mm	
DRAWN PEARL		10/17/13	
CHECKED		/ /	
APPROVED		/ /	
DATE		SIZE A4 REV. X1	
REV.		DESCRIPTION	
1		2	
3		4	
5		6	
7		8	
9		10	