


Mate with 312A(B20X)
 Insulator: Nylon 6/6 UL 94V-2
 Color: White
 Conductor: Brass/Tin plated




PART NO.

311 A E XX M A T B2 S 3 D 1
 1 2 3 4 5 6 7 8 9 10 11 12



- 1.SERIES NO.
- 2.TYPE D=DIP
- 3.GREEN OPTION E=RoHS
- 4.CONTACT NO. 02~16
- 5.CONTACT TYPE M=Male
- 6.ROW TYPE A=Single Row
- 7.CONTACT PLATING T=Tin Plated
- 8.PITCH OPTION B2=2.5mm
- 9.CONTACT OPTION S=Straight
- 10.PROCESS OPTION 3=TYPE 3
- 11.PACKAGE OPTION D=Bag
- 12.INSULATOR COLOR 1=White



P.C.B. LAYOUT

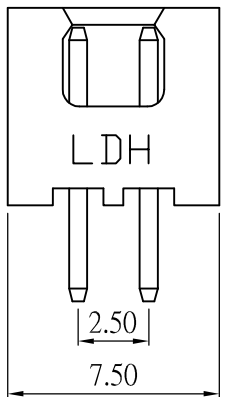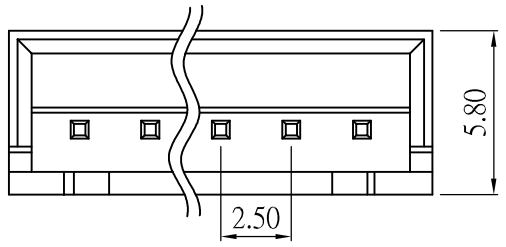

2PIN

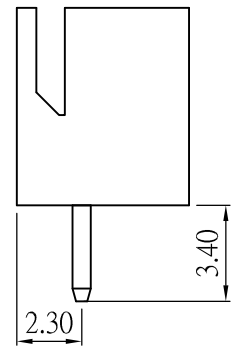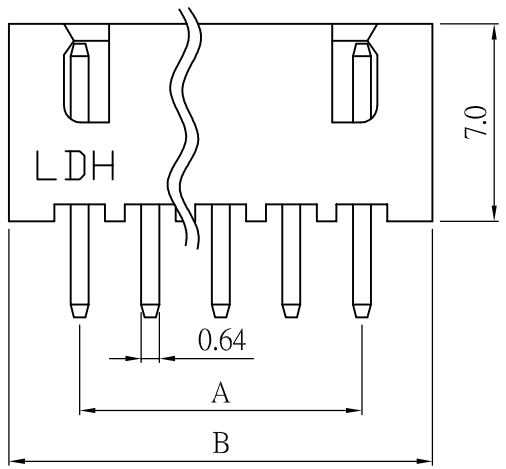

POSITION	Dim A	Dim B
2	2.50	7.5
3	5.00	10.0
4	7.50	12.5
5	10.00	15.0
6	12.50	17.5
7	15.00	20.0
8	17.50	22.5
9	20.00	25.0
10	22.50	27.5
11	25.00	30.0
12	27.50	32.5
13	30.00	35.0
14	32.50	37.5
15	35.00	40.0
16	37.50	42.5

UNLESS OTHERWISE SPECIFIED TOLERANCE	
X"	±2
.0	±0.30
.00	±0.20
.000	±0.10
SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	10/17/13
CHECKED	/ /
APPROVED	/ /
SIZE A4	REV. X1



CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: WAFER Pitch 2.5mm
 PRODUCT NO. 311AEXXMATB2S3D1
 FILE NAME: 311AEXXMATB2S3D1(W3)

REV.	DESCRIPTION	DATE