




Insulator: PA 6/6 UL 94V-2
 Color: White
 Conductor: Brass/100u" Tin Plated
 Pin: SQ0.64*12.3mm

Specification:
 Dielectric Withstanding Voltage:1000V AC
 Soldering temperature:230±5°C
 Immersion period:3±0.5sec

PART NO.

311 A E XX M A T B3 S 4 D 1
 1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|-------------------|--------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE D=DIP | B3=2.54mm |
| 3.GREEN OPTION | 9.CONTACT OPTION |
| E=RoHS | S=Straight |
| 4.CONTACT NO. | 10.PROCESS OPTION |
| 02~04 | 4=TYPE 4 |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| M=Male | D=Bag |
| 6.ROW TYPE | 12.INSULATOR COLOR |
| A=Single Row | 1=White |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

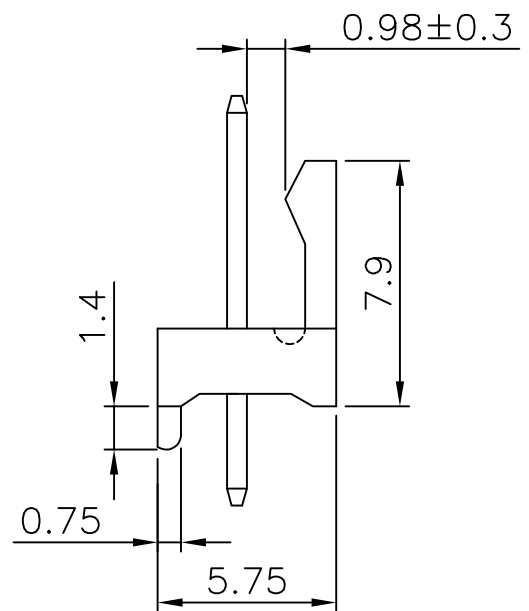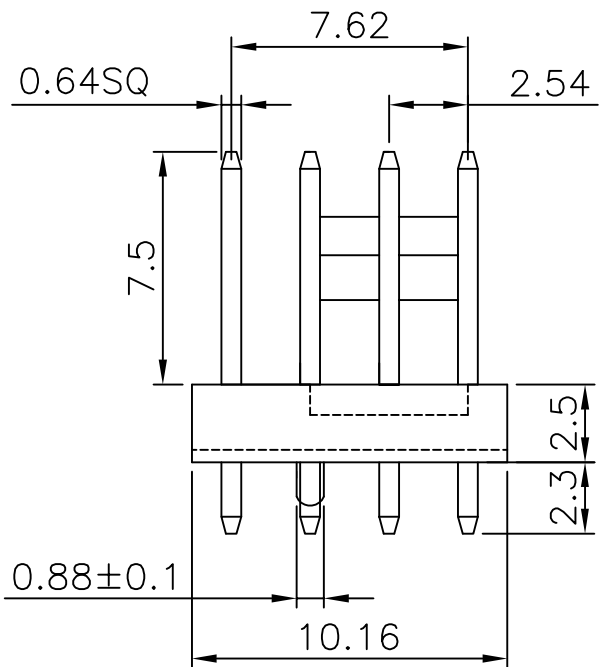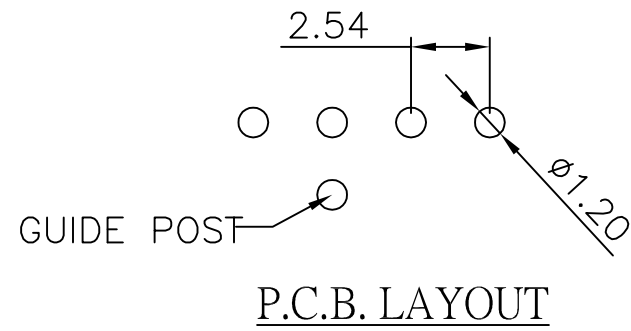

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
X'	±2	
.0	±0.30	
.000	±0.10	
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME:
DRAWN PEARL	10/17/13	WAFER Pitch 2.54mm
CHECKED	/ /	PRODUCT NO. 311AEXXMATB3S4D1
APPROVED	/ /	FILE NAME: 311AEXXMATB3S4D1(W3)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		