

MATERIAL

Insulator : NYLON 66 UL94V-2

Contact Pin : Brass

SPECIFICATION

Current Rate : 9 AMP

Voltage Rating : 250V AC

Insulation Resistance : 1000MΩMin. at DC 500V

Contact Resistance : 30mΩMax. at DC 100mA






Operation Temperature : -25°C to + 85°C

PART NO.

3 11 A E XX M B T D 1 S 4 D 9
1 2 3 4 5 6 7 8 9 10 11 12

- 1. SERIES NO.
- 2. TYPE D=DIP
- 3. GREEN OPTION
E=RHS
- 4. CONTACT NO.
02~24
- 5. CONTACT TYPE
M=MALE
- 6. ROW TYPE
B=DUAL ROW
- 7. CONTACT PLATING
T=TIN PLATED


- 8. PITCH OPTION
DI=4.2MM
- 9. CONTACT OPTION
S=STRAIGHT
- 10. PROCESS OPTION
4=TYPE 2
- 11. PACKAGE OPTION
D=BAG
- 12. INSULATOR COLOR
9=TRANSPARENCY

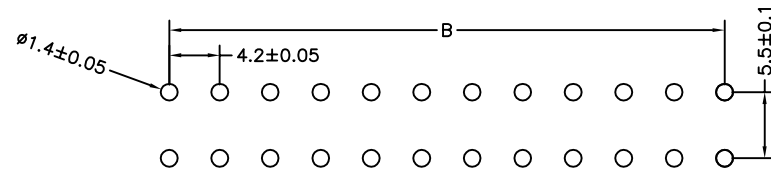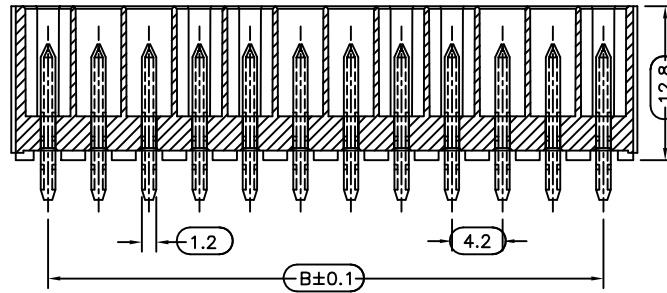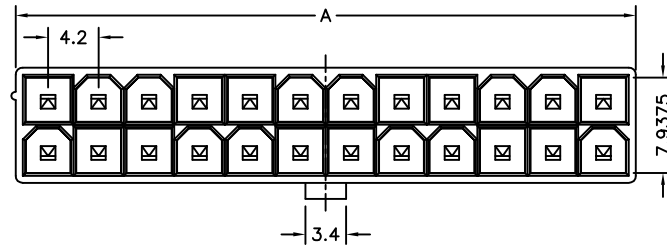

Recommended P.C.B Layout

Circuits	DIM A	DIM B
2	5.2	
4	9.4	4.2
6	13.6	8.4
8	17.8	12.6
10	22.0	16.8
12	26.2	21.0
14	30.4	25.2
16	34.6	29.4
18	38.8	33.6
20	43.0	37.8
22	47.2	42.0
24	51.4	46.2

For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. = ±3° .0 = ±.30 .00 = ±.20		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
SCALE: AS SHOWN	UNIT: MM		
DRAWN: PEARL	03/14/2016	DRAWN NAME: WAFER Pitch 4.2mm	
CHECKED:		PRODUCT NO. 311AEXXMBTD1S4D9	
APPROVED:		FILE NAME: 311AEXXMBTD1S4D9(P)	
REV.	DESCRIPTION	DATE	SIZE A4 REV. X1