


Available: 2~20pins
 Mate with 312A(A100)
 Insulator: High Temperature Thermoplastic UL 94V-0
 Color: Natural
 Conductor: Phosphor Bronze/Tin plated

PART NO.


311 D E XX M A T A1 S 1 B 4
 1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|-------------------|--------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE D=SMT | A1=1.0mm |
| 3.GREEN OPTION | 9.CONTACT OPTION |
| E=RoHS | S=Straight |
| 4.CONTACT NO. | 10.PROCESS OPTION |
| 02~20 | 1=Type 1 |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| M=Male | B=Tube |
| 6.ROW TYPE | 12.INSULATOR COLOR |
| A=Single Row | 4=Gray |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

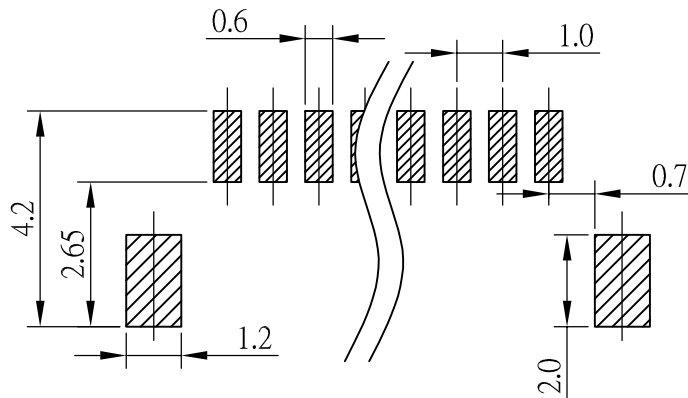

P.C.B. LAYOUT

CIRCUITS	Dim.A	Dim.B
2	1.00	4.0
3	2.00	5.0
4	3.00	6.0
5	4.00	7.0
6	5.00	8.0
7	6.00	9.0
8	7.00	10.0
9	8.00	11.0
10	9.00	12.0
11	10.00	13.0
12	11.00	14.0
13	12.00	15.0
14	13.00	16.0
15	14.00	17.0
16	15.00	18.0
17	16.00	19.0
18	17.00	20.0
19	18.00	21.0
20	19.00	22.0

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
X.	±2	
.0	±0.30	SCALE: AS SHOWN UNIT: mm DRAWN PEARL 10/14/13 CHECKED / / APPROVED / / SIZE A4 REV. X1
.00	±0.20	
.000	±0.10	
DRAWN NAME:		WAFFER SMT Pitch
PRODUCT NO.		311DEXXMATA1S1B4
FILE NAME:		311DEXXMATA1S1B4(W3)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		