
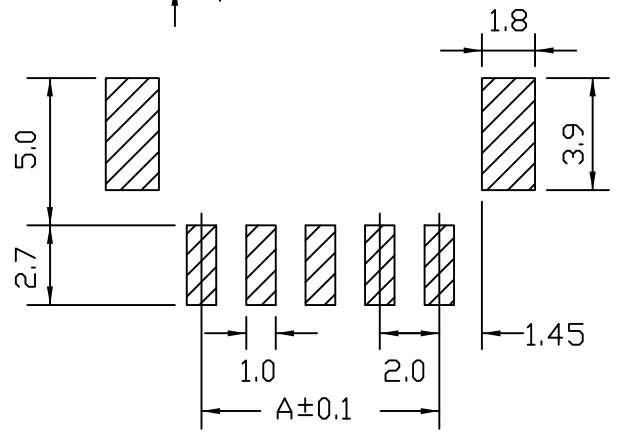
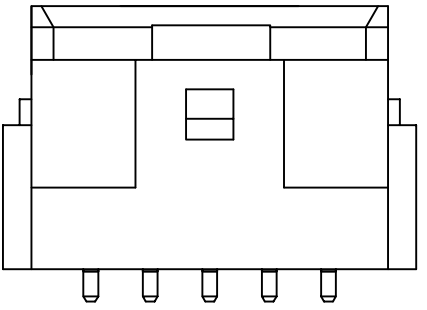
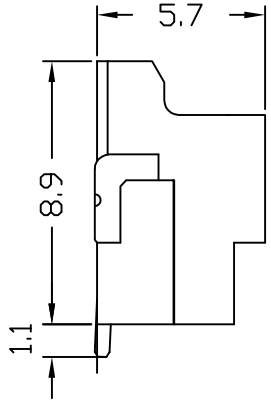


Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	8.0(0.315)
3	4.0(0.157)	10.0(0.394)
4	6.0(0.236)	12.0(0.472)
5	8.0(0.315)	14.0(0.551)
6	10.0(0.394)	16.0(0.630)
7	12.0(0.472)	18.0(0.709)
8	14.0(0.551)	20.0(0.787)
9	16.0(0.630)	22.0(0.866)

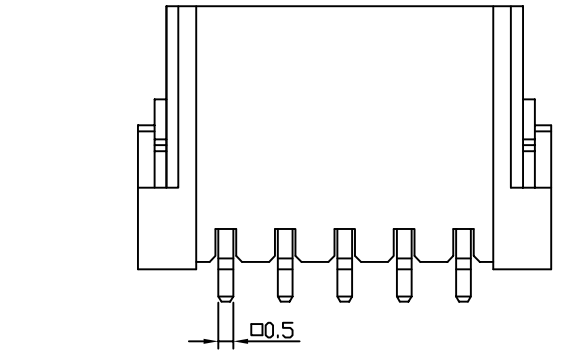

RECOMMENDED P.C.BOARD LAYOUT DIMM.


Specifications

Current Rating: 3A AC/ DC (Max)AWG#22
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C ~ + 85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage:800V AC/Minute
 Pin : Brass/ Tin-plated/ Gold-flash
 Wafer Material: Nylon 6T,UL94V-0,natural
 Solder tab:Brass/Tin-plated

PART NO.

$\frac{311}{1} \frac{D}{2} \frac{E}{3} \frac{XX}{4} \frac{M}{5} \frac{A}{6} \frac{T}{7} \frac{B1}{8} \frac{R}{9} \frac{4}{10} \frac{D}{11} \frac{4}{12}$

- | | |
|-------------------|--------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE D=SMT | B1=2.0mm |
| 3.GREEN OPTION | 9.CONTACT OPTION |
| E=RoHS | R=Right Angle |
| 4.CONTACT NO. | 10.PROCESS OPTION |
| 02~09 | 4=TYPE 4 |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| M=Male | D=Bag |
| 6.ROW TYPE | 12.INSULATOR COLOR |
| A=Single Row | 4=Gray |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
.0	±0.25	
.00	±0.20	SCALE: AS SHOWN UNIT: mm
DRAWN PEARL	10/14/13	DRAWN NAME: WAFER SMT Pitch
CHECKED	/ /	2.0mm
APPROVED	/ /	PRODUCT NO. 311DEXXMATB1R4D4
SIZE A4	REV. X1	FILE NAME: 311DEXXMATB1R4D4(W3)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		