

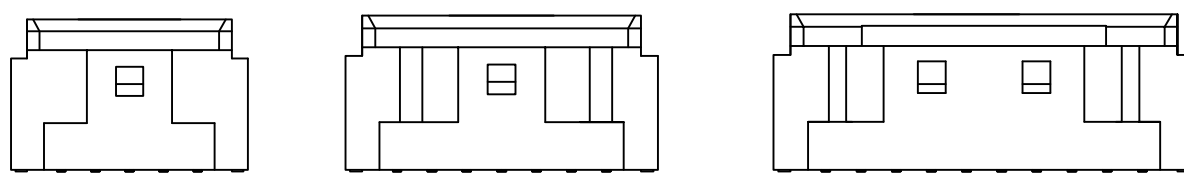
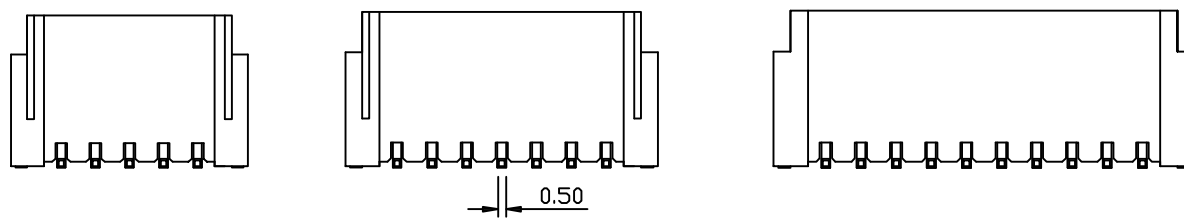


Material: Nylon 6T, UL 94V-0, Natural
 Conductor: Brass, Tin-Plated/Gold-Flash
 Solder Tab: Brass, Tin-Plated
 Available: 2~15P
 Mate with 312A(B10X)
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Operating Temperature: -25°C ~ 85°C


PART NO.

311 D E XX M A T B1 S 4 D 4
 1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|-------------------|--------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE D=SMT | B1=2.0mm |
| 3.GREEN OPTION | 9.CONTACT OPTION |
| E=RoHS | S=Straight |
| 4.CONTACT NO. | 10.PROCESS OPTION |
| 02~15 | 4=TYPE 4 |
| 5.CONTACT TYPE | 11.PACKAGE OPTION |
| M=Male | D=Bag |
| 6.ROW TYPE | 12.INSULATOR COLOR |
| A=Single Row | 4=Gray |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

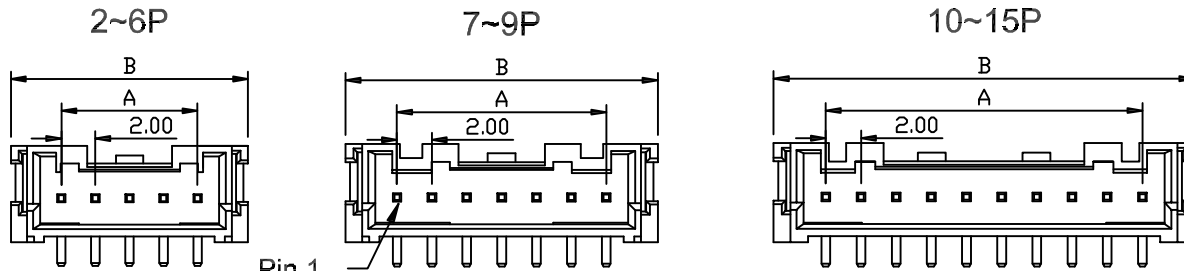

Circuit	Dim. A	Dim. B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00

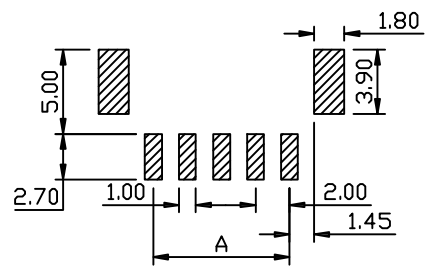

RECOMMENDED P.C.BOARD HOLE DIMM.

UNLESS OTHERWISE SPECIFIED TOLERANCE	
X"	±2'
.0	±0.30
.00	±0.20
.000	±0.10
SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	10/14/13
CHECKED	/ /
APPROVED	/ /

OXOC

CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME:
 WAFER SMT Pitch
 2.0mm

PRODUCT NO. 311DEXXMATB1S4D4

FILE NAME: 311DEXXMATB1S4D4(W3)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	X1