
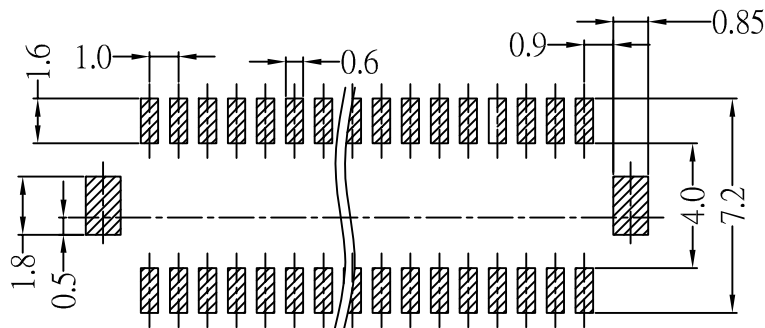


SEE:A-A1

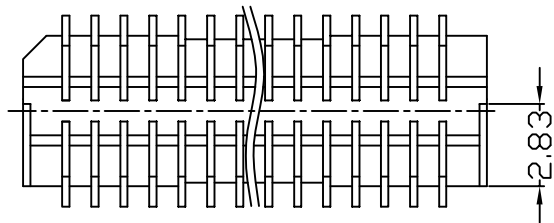

P.C.B. LAYOUT


Available: 20~50pins  
 Mate with 312A(A10X)  
 Insulator: Glass-Filled Polyamide, UL 94V-0  
 Color: Natural  
 Conductor: Phosphor Bronze/Tin plated

PART NO.

311 D E XX M B T A1 S 2 B 3  
 1 2 3 4 5 6 7 8 9 101112

- 1.SERIES NO.
- 2.TYPE D=SMT
- 3.GREEN OPTION  
E=RoHS
- 4.CONTACT NO.  
20~50
- 5.CONTACT TYPE  
M=Male
- 6.ROW TYPE  
B=Dual Row
- 7.CONTACT PLATING  
T=Tin Plated
- 8.PITCH OPTION  
A1=1.0mm
- 9.CONTACT OPTION  
S=Straight
- 10.PROCESS OPTION  
2=Type 2
- 11.PACKAGE OPTION  
B=Tube
- 12.INSULATOR COLOR  
3=Black

CIRCUITS	Dim.A	Dim.B
20	9.0	12.3
30	14.0	17.3
40	19.0	22.3
50	24.0	27.3

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <b>CHANT SINCERE CO., LTD</b> TEL:886-02-86471251 FAX:886-02-86472962
X'	±2	
.0	±0.30	
.00	±0.20	
.000	±0.10	
SCALE: AS SHOWN	UNIT: mm	
DRAWN PEARL	10/14/13	DRAWN NAME:
CHECKED	/ /	WAFER SMT
APPROVED	/ /	Pitch
		PRODUCT No.
		1.0mm 311DEXXMBTA1S2B3
		FILE NAME: 311DEXXMBTA1S2B3(W3)

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	X1