
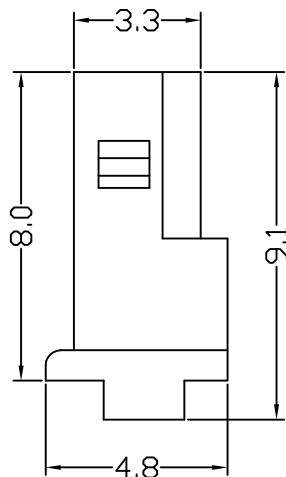


Poles	Dimensions (mm)	
	A	B
2	A	B
3	A	B
4	A	B
5	A	B
6	A	B
7	A	B
8	A	B
9	A	B
10	A	B
11	A	B
12	A	B
13	A	B
14	A	B
15	A	B
16	37.50	40.90

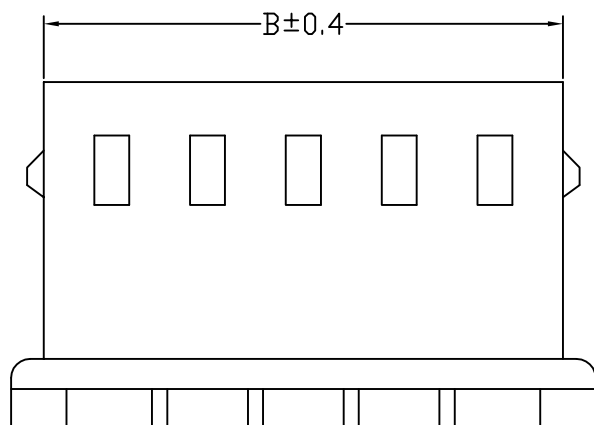

Features

- Ver low profile
- Material: Nylon 66 UL94V-0
- Accept 313A(B201) terminal
- Mates with 311A(B2S1),311A(B2R1) Wafer polarized
- Molded-in pull tabs
- Friction lock

■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25°C~+85°C
- Contact resistance: Initial Value/10 $\mu\Omega$
- After environmental testing/20 $\mu\Omega$

PART NO.

$\frac{312}{1} \frac{A}{2} \frac{E}{3} \frac{XX}{4} \frac{F}{5} \frac{A}{6} \frac{0}{7} \frac{B2}{8} \frac{0}{9} \frac{1}{10} \frac{D}{11} \frac{1}{12}$

- SERIES NO.
- TYPE A=Standard
- GREEN OPTION
E=RoHS
- CONTACT NO.
02~16
- CONTACT TYPE
F=Female
- ROW TYPE
A=Single Row
- FILL IT WITH "0"

- PITCH OPTION
B2=2.5mm
- FILL IT WITH "0"
- PROCESS OPTION
1=TYPE 1
- PACKAGE OPTION
D=Bag
- INSULATOR COLOR
1=White

UNLESS OTHERWISE SPECIFIED TOLERANCE		UNIT: mm		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
.0	±0.40	SCALE: AS SHOWN	UNIT: mm	
.00	±0.25	DRAWN PEARL	10/04/13	
.000	±0.08	CHECKED	/ /	
		APPROVED	/ /	
				DRAWN NAME: Wafer Hosing Pitch 2.5mm
				PRODUCT NO. 312AEXXFA0B201D1
				FILE NAME: 312AEXXFA0B201D1(W3)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	X1