



Dimensional Information (mm)

POSITION	Dim. A	Dim. B	Dim. C
2	5.08	11.24	15.24
3	10.16	16.32	20.32
4	15.24	21.40	25.40

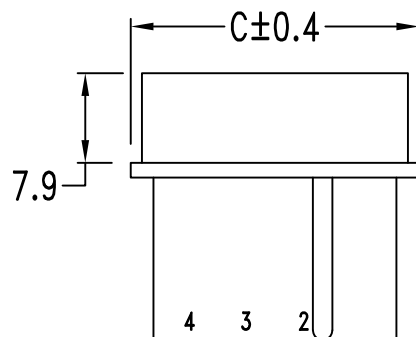

Features:

- Material: UL 94V-2 nylon, nature
- Accepts 313A(E10X)Male terminal
- Mates with 312A(E100)Male housings

Specification:

- Current rating: 7A
- Voltage rating: 250V AC, DC
- Insulation resistance: 500M Ω Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

PART NO.

312 A E XX F A 0 E1 0 0 D 9
1 2 3 4 5 6 7 8 9 10 11 12

- SERIES NO.
- TYPE A=Standard
- GREEN OPTION
E=RoHS
- CONTACT NO.
02-04
- CONTACT TYPE
F=Female
- ROW TYPE
A=Single Row
- FILL IT WITH "0"

- PITCH OPTION
E1=5.08mm
- FILL IT WITH "0"
- PROCESS OPTION
0=NON Distribution
- PACKAGE OPTION
D=Bag
- INSULATOR COLOR
9=Transparency

UNLESS OTHERWISE
SPECIFIED TOLERANCE

.0	±0.40
.00	±0.25
.000	±0.08

SCALE: AS SHOWN UNIT: mm

DRAWN PEARL 10/04/13

CHECKED / /

APPROVED / /

SIZE A4 REV. X1



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: Wafer Housing Pitch

PRODUCT NO. 312AEXXFA0E100D9

FILE NAME: 312AEXXFA0E100D9(W3)

REV.	DESCRIPTION	DATE
------	-------------	------