


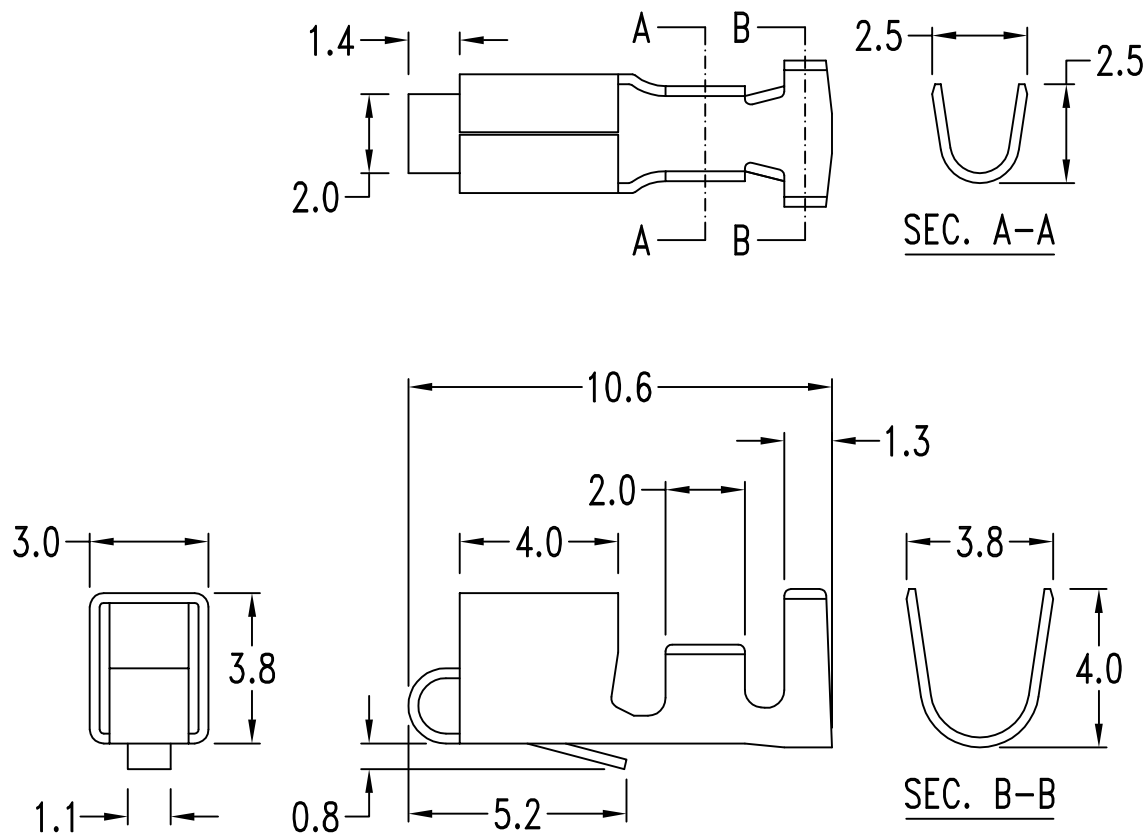

Features:

- Material: Brass
- Finished: Tin-plated
- Used in 312A(C201) housing
- Wire range: #18 ~ #22 AWG
- Q'ty: 4000 PCS/Reel
- Insulation O.D.: 3.0mm Max.

Specification:

- Current rating: 7A
- Voltage rating: 250V
- Contact resistance: Initial value/10mΩ Max.
After environmental testing/20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C
(including temperature rise)

PART NO.

313 A E 00 F P T C2 0 1 X 0
1 2 3 4 5 6 7 8 9 10 11 12

- SERIES NO.
- TYPE A=Crimp
- GREEN OPTION
E=RoHS
- FILL IT WITH "00"
- CONTACT TYPE
F=Female
- MATERIAL OPTION
P=Brass
- CONTACT PLATING
T=Tin Plated
- PITCH OPTION
C2=3.96mm
- FILL IT WITH "0"
- PROCESS OPTION
1=TYPE 1
- PACKAGE OPTION
C=Tape Reel
D=Bag
- FILL IT WITH "0"

UNLESS OTHERWISE SPECIFIED TOLERANCE			
.0	±0.40		
.00	±0.25		
.000	±0.08		
SCALE: AS SHOWN	UNIT: mm		
DRAWN PEARL	09/18/13	DRAWN NAME: .156"(3.96mm) Crimp Terminal	
CHECKED	/ /		
APPROVED	/ /	PRODUCT NO. 313AE00FPTC201X0	
REV.		FILE NAME: 313AE00FPTC201X0(W3)	



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	X1	313AE00FPTC201X0(W3)