





Features / Specifications:

- Used in 312A(F100) series housing
- Current rating: 13A
- Voltage rating: 600V
- Ambient temperature range: -55°C ~ 105°C

PART NO.


313 A E 00 F X T F1 0 X X 0
 1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|---------------------|---------------------|
| 1.SERIES NO. | 8.PITCH OPTION |
| 2.TYPE A=Crimp | F1=6.35mm |
| 3.GREEN OPTION | 9.FILL IT WITH "0" |
| E=RoHS | 10.PROCESS OPTION |
| 4.FILL IT WITH "00" | 1=TYPE 1 |
| 5.CONTACT TYPE | 2=TYPE 2 |
| F=Female | 11.PACKAGE OPTION |
| 6.MATERIAL OPTION | C=Tape Reel |
| P=Brass | D=Bag |
| S=Phosphor Bronze | 12.FILL IT WITH "0" |
| 7.CONTACT PLATING | |
| T=Tin Plated | |

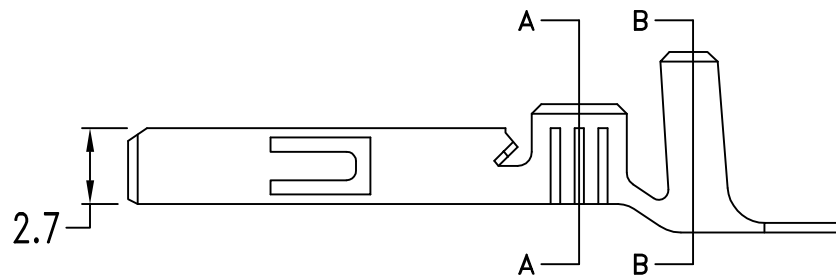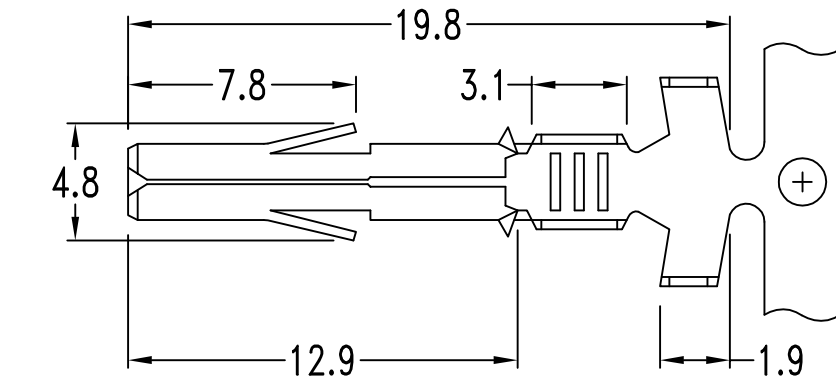

Ordering & Dimensional Information (mm)

Type No.	Dimension				Wire range	Material	Thickness
	a	b	c	d			
TYPE 1	2.4	2.4	3.4	3.4	#18 ~ #22	Brass	0.3mm
TYPE 2	2.9	3.5	4.5±0.4	4.5±0.4	#16 ~ #20	Phosphor bronze	

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962
.0	±0.25	
.00	±0.15	
.000	±0.05	
SCALE: AS SHOWN	UNIT: mm	
DRAWN PEARL	09/18/13	DRAWN NAME: .25"(6.35mm) Female Crimp Terminal
CHECKED	/ /	
APPROVED	/ /	PRODUCT NO. 313AE00FXTF10XX0
REV.		FILE NAME: 313AE00FXTF101X0(W3)

REV.	DESCRIPTION	DATE	SIZE A4	REV. X1
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				