
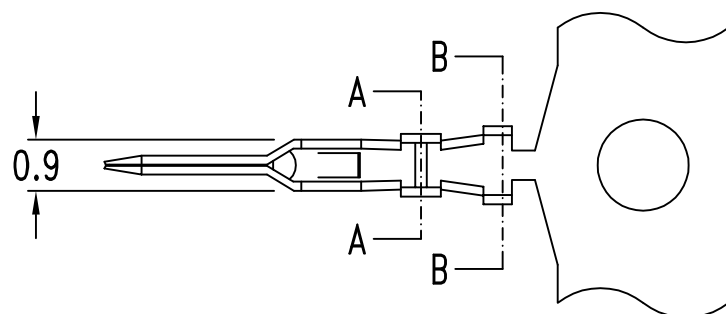



SEC. A-A

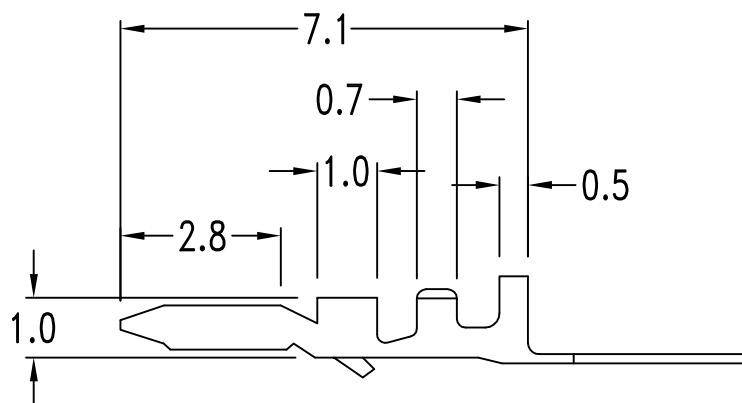

SEC. B-B

Features:

- Material: Phosphor bronze
- Finished: Tin-plated
- Used in 312A(A200)Female housing
- Wire range: #28 ~ #32 AWG
- Thickness: 0.15mm

Specification:

- Current rating: 1A AC, DC (Max.)
- Voltage rating: 100V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 500V AC/minute
- Temperature range: -25°C ~ 85°C

PART NO.

313 A E 00 M S T A2 0 0 X 0
1 2 3 4 5 6 7 8 9 10 11 12

- SERIES NO.
- TYPE A=Crimp
- GREEN OPTION
E=RoHS
- FILL IT WITH "00"
- CONTACT TYPE
M=Male
S=Phosphor Bronze
- MATERIAL OPTION
T=Tin Plated

- PITCH OPTION
A2=1.25mm
- FILL IT WITH "0"
- PROCESS OPTION
0=NON Distribution
- PACKAGE OPTION
C=Tape Reel
D=Bag
- FILL IT WITH "0"

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
.0	±0.25		
.00	±0.15		
.000	±0.05		
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME: .049*(1.25mm) Male Crimp Terminal PRODUCT NO. 313AE00MSTA200X0 FILE NAME: 313AE00MSTA200X0(W3)	
DRAWN PEARL	09/18/13		
CHECKED	/ /		
APPROVED	/ /	SIZE A4 REV. X1	
REV.	DESCRIPTION	DATE	