

**Specification:**

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

PART NO.

317 D E 04 P X A 0 A X X  
 1 2 3 4 5 6 7 8 9 10 11

1.SERIES NO.

2.TYPE: D=SMT

3.GREEN OPTION:

E=RoHS

4.CONTACT NUMBER:

04

5.CONTACT TYPE:

P=Female

6.CONTACT AREA PLATING:

S=1u" Gold Gold

7.TYPE OPTION:

A=A Type

8.FILL IT WITH "0"

9.FILL IT WITH "A"

10.PACKING OPTION:

0=Tray

2=Tape & Reel

11.INSULATOR COLOR

1=White

3=Black

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"



UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.	±0.38
.0	±0.25
.00	±0.13
.000	±0.05




**CHANT SINCERE CO., LTD**  
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN Vicky	02/11/15
CHECKED	/ /
APPROVED	/ /

DRAWN NAME:	U.S.B. SMT TYPE (FEMALE)
PRODUCT NO.	317DE04PXA0AXX
FILE NAME:	317DE04PXA0AXX(K)

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	KX1

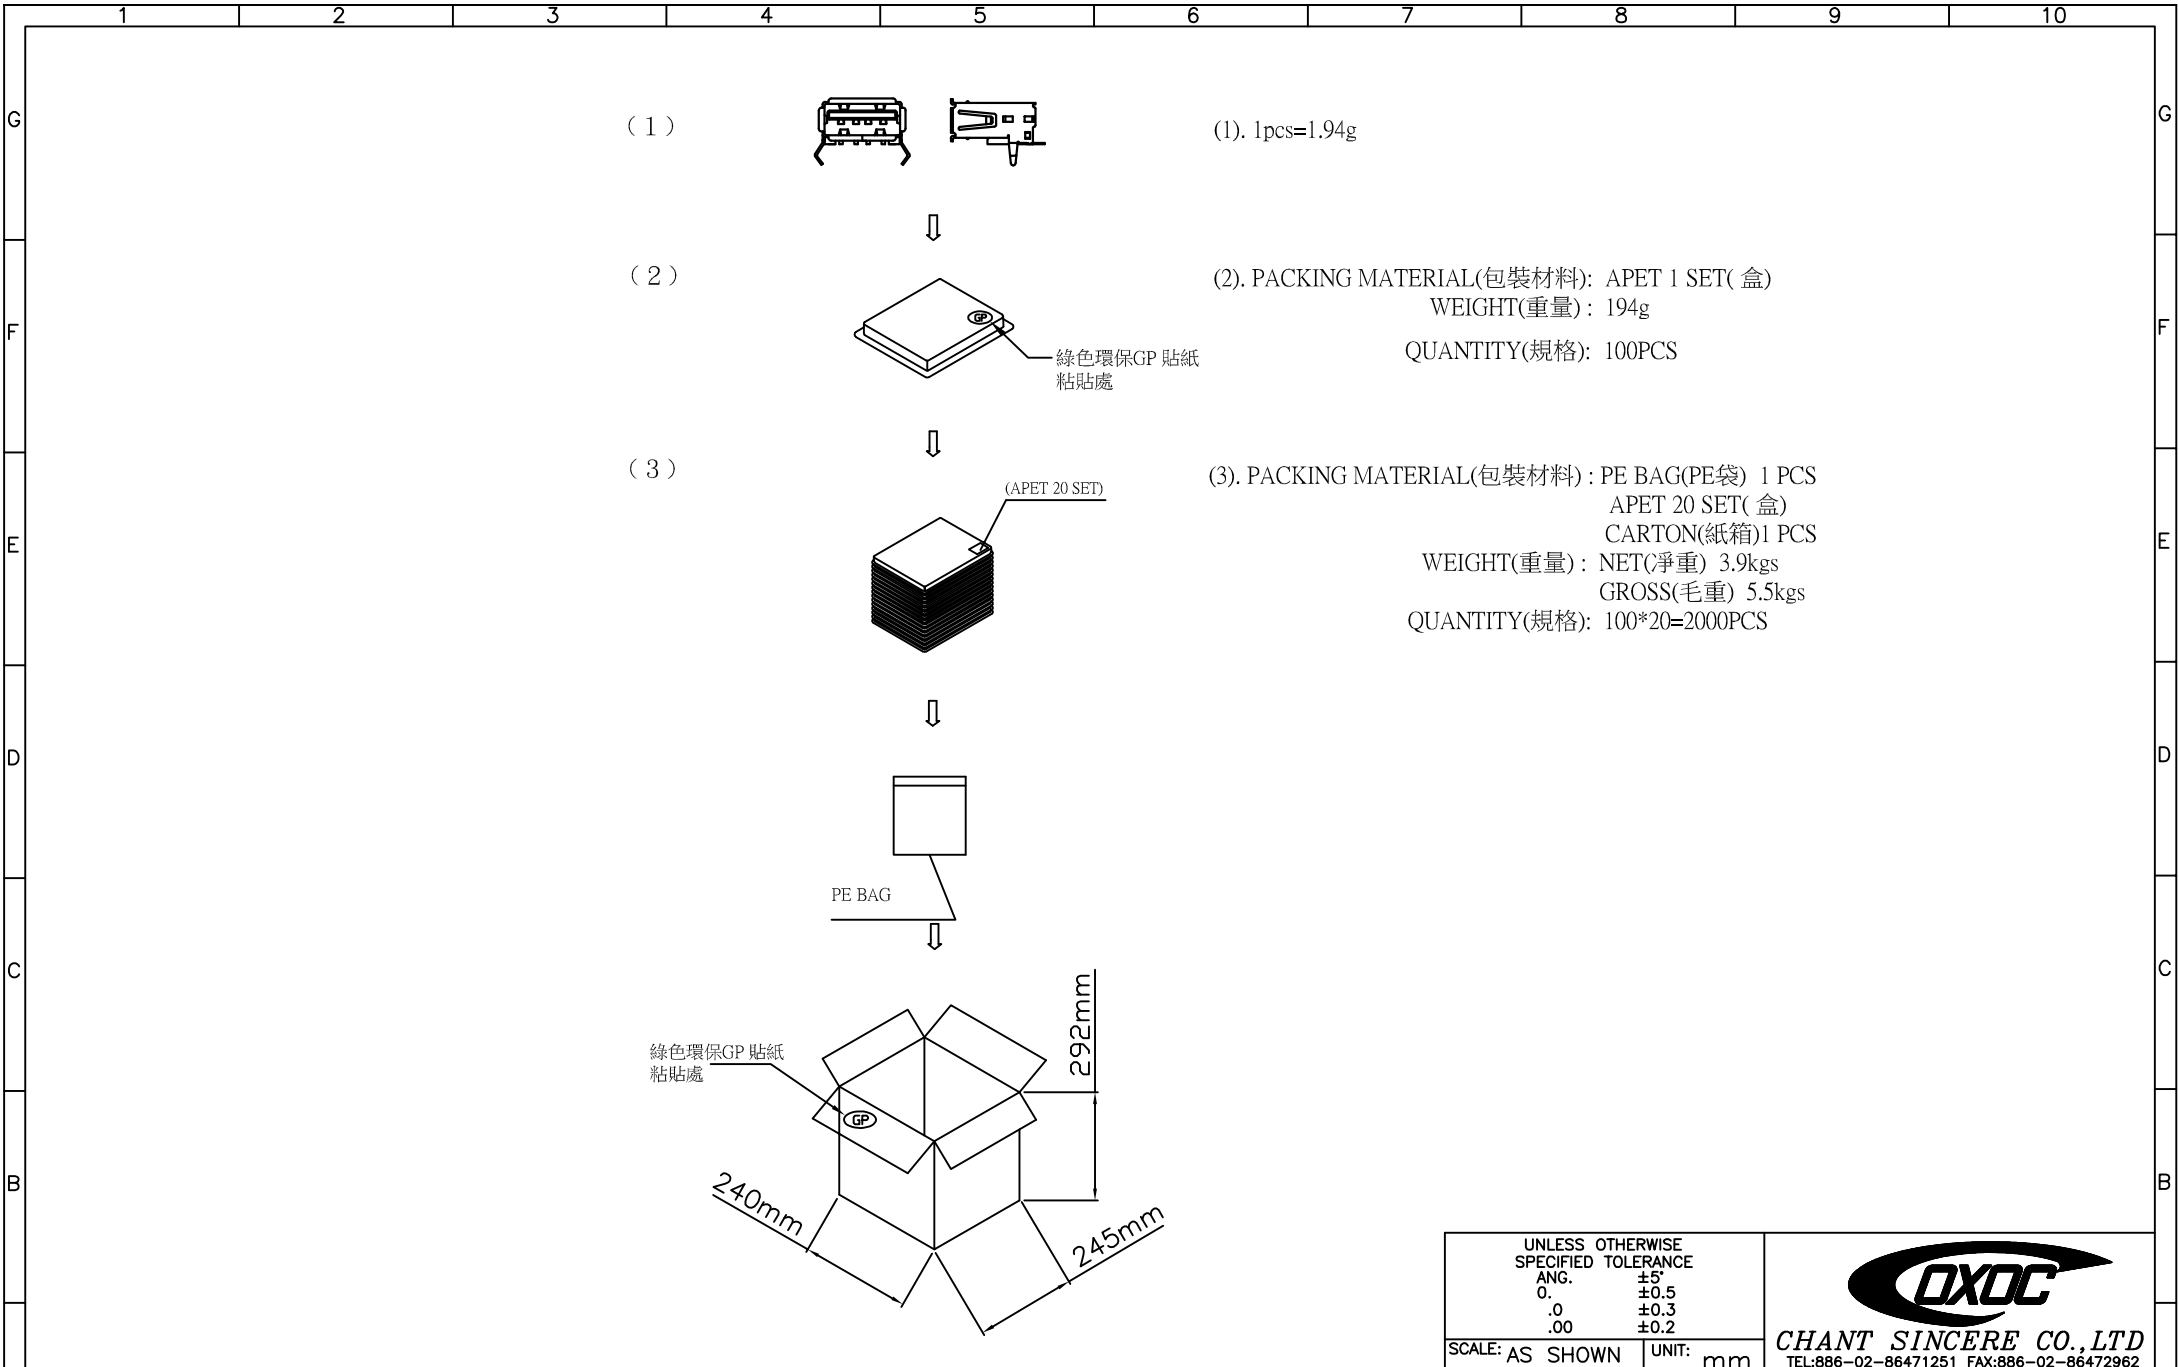


(1)




(1). 1pcs=1.94g

(2)


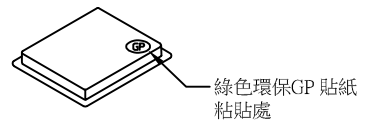


(2). PACKING MATERIAL(包裝材料): APET 1 SET( 盒)  
WEIGHT(重量): 194g  
QUANTITY(規格): 100PCS

(3)



(3). PACKING MATERIAL(包裝材料): PE BAG(PE袋) 1 PCS  
APET 20 SET( 盒)  
CARTON(紙箱)1 PCS  
WEIGHT(重量): NET(淨重) 3.9kgs  
GROSS(毛重) 5.5kgs  
QUANTITY(規格): 100\*20=2000PCS

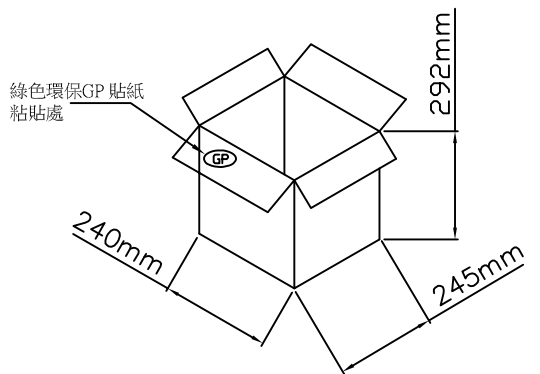

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2







**CHANT SINCERE CO., LTD**  
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN Vicky	02/11/15
CHECKED	/ /
APPROVED	/ /

DRAWN NAME:  
U.S.B. SMT TYPE (FEMALE)  
TRAY 2/3  
PRODUCT NO. 317DX04PXA0AXX



REV.	DESCRIPTION	DATE	SIZE A4	REV: KX1	FILE NAME: 317DE04PXA0AXX(K)
------	-------------	------	---------	----------	------------------------------

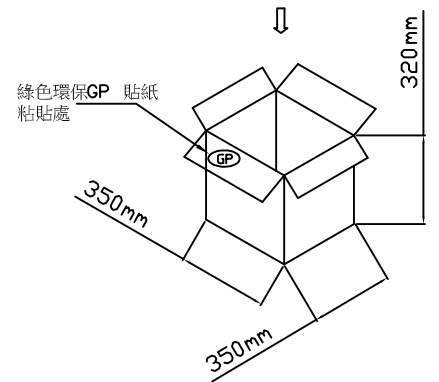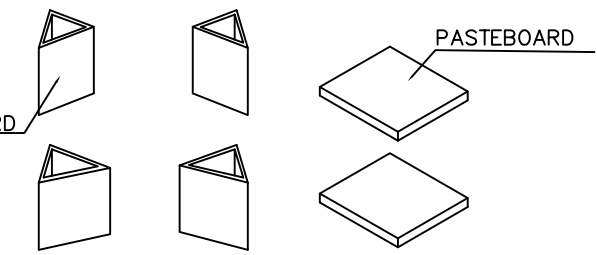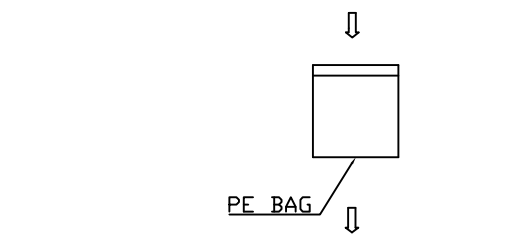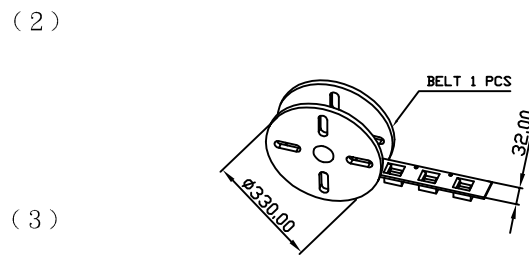

(1). 1pcs=1.92g

(2). PACKING MATERIAL(包裝材料): BELT 1 SET  
WEIGHT(重量): 384g  
QUANTITY(規格): 200PCS

(3). PACKING MATERIAL(包裝材料): PE BAG(PE袋) 1 PCS  
BELT 9 SET  
CARTON(紙箱)1 PCS  
WEIGHT(重量): NET(淨重) 3.5 kgs  
GROSS(毛重) 7.5kgs  
QUANTITY(規格): 200\*9=1800PCS

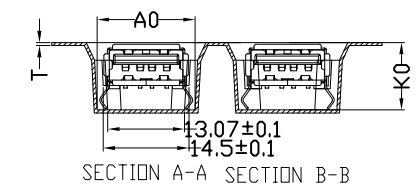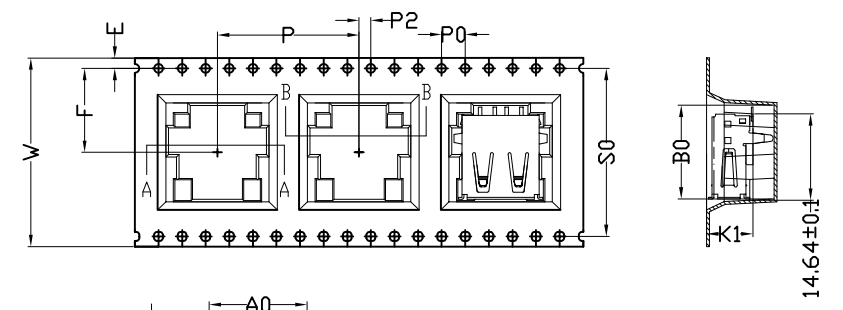

ITEM	W	A0	B0	K0	K1	P	F	E	P0	P2	S0	T
DIM	32.00±0.3	16.62±0.1	15.86±0.1	11.45±0.1	7.30±0.1	24.00±0.1	14.25±0.15	1.75±0.1	4.00±0.1	2.00±0.1	28.50±0.1	0.50±0.05

- 10 sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$ .
- Carrier camber not to exceed 1mm in 260mm.
- A0 and B0 measured on a plane 0.3mm above the bottom of the pocket.
- K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- All dimensions meet EIA-481-C requirements.
- Material: Black Anti-Static Polystyrene.
- Packing length per 13" reel : 4.2 Meters.
- Component load per 13" reel : 200 pcs.

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <b>CHANT SINCERE CO., LTD</b> TEL:886-02-86471251 FAX:886-02-86472962	
ANG.	±5'		
0.	±0.5	SCALE: AS SHOWN	UNIT: mm
.0	±0.3	DRAWN Vicky	02/11/15
.00	±0.2	CHECKED	/ /
		APPROVED	/ /
REV.		DATE	FILE NAME: 317DX04PXA0AXX(K)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	KX