


Electrical Characteristics :  
 Insulation Resistance : 500MΩ Min.  
 Contact Resistance : 50mΩ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A  
 Operation Temperature:-40~80°C

Material:  
 Housing: Thermoplastic UL94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Copper Alloy  
 Plated With Gold And Tin In Solder Area.  
 Shell: Copper Alloy, Nickel Plating

Part no.  $\frac{415}{1} \frac{A}{2} \frac{E}{3} \frac{4}{4} \frac{1}{5} \frac{1}{6} \frac{X}{7} \frac{2}{8} \frac{C}{9} \frac{2}{10} \frac{0}{11} \frac{3}{12} \frac{A}{13} \frac{3}{14}$

- |                           |                      |
|---------------------------|----------------------|
| 1.SERIES NO.              | 8.CONTACT TYPE:      |
| 2.TYPE: A=Dual Row        | 2=Flat Pin           |
| 3.GREEN OPTION:           | 9.SHELL OPTION:      |
| E=RoHS(Bright)            | C=W/Shell(Post=3.35) |
| 4.CONTACT NO.:            | 10.SHRAPNEL OPTION:  |
| 4=8P8C                    | 2=Open Backward      |
| 5.PORT NO:                | 11.TAB ORIENTATION:  |
| 1=2*1                     | 0=Standard           |
| 6.TYPE OPTION:            | 12.POST DIMENSION:   |
| 1=W/LED                   | 3=7.11mm(Behind)     |
| (Yellow Left,Green Right) | 13.PACKAGE OPTION:   |
| 7.CONTACT PLATING:        | A=Tray               |
| S=Selective Gold          | 14.INSULATOR COLOR:  |
| 6=Selective Gold 6u"      | 3=Black              |

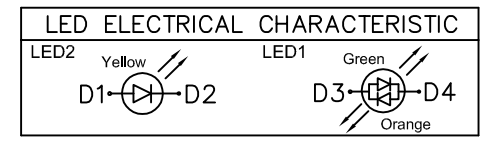

UNLESS OTHERWISE SPECIFIED TOLERANCE	
.0	±0.25
.00	±0.15
.000	±0.0075



CHANT SINCERE CO.,LTD  
 TEL:886-02-86471251 FAX:886-02-86472962

For SIP

SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	01/15/2016
CHECKED	
APPROVED	

DRAWN NAME:  
 Modular Jack Dual Row  
 2x1 Ports , With Led  
 PRODUCT NO: 415AE411X2C203A3  
 FILE NAME: 415AE411X2C203A3(ZH)

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	X2