

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE: ±0.05mm
PCB THICKNESS: 1.60±0.05mm


Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A
Operation Temperature: -40~80°C

Material:
Housing: Thermoplastic UL94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Copper Alloy ,
Plated With Gold And Tin On Solder Area.
Shell: Copper Alloy, Nickel Plating.

Part no.

415 A E 4 4 J X 2 C 2 0 3 A 3
1 2 3 4 5 6 7 8 9 10 11 12 13 14

- | | |
|--|--|
| 1.SERIES NO. | 8.CONTACT TYPE: |
| 2.TYPE: A=Dual Row | 2=Flat Pin |
| 3.GREEN OPTION:
E=RoHS(Bright) | 9.SHELL OPTION:
C=W/Shell |
| 4.CONTACT NO.:
4=8P8C | 10.SHRAPNEL OPTION:
2=Open Shrapnel |
| 5.PORT NO:
4=2*4 | 11.TAB ORIENTATION:
0=Standard |
| 6.TYPE OPTION:
J=W/LED
(Yellow Left,Gr/Or Right) | 12.POST DIMENSION:
3=7.11mm(Behind) |
| 7.CONTACT PLATING:
S=Selective Gold
6=Selective Gold 6u" | 13.PACKAGE OPTION:
A=Tray |
| | 14.INSULATOR COLOR:
3=Black |

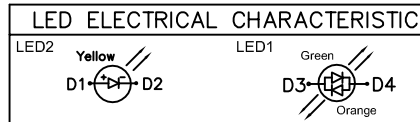

UNLESS OTHERWISE SPECIFIED TOLERANCE	
0.000 mm ± 0.075 mm	
0.00 mm ± 0.15 mm	
0.0 mm ± 0.25 mm	
SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	11/10/2015
CHECKED	
APPROVED	

OXOC

CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME:
RJ45 , Shielded , Receptacle ,
Horizontal , 2x4 Ports , Tht , With LED

PRODUCT NO:
415AE44JX2C203A3

FILE NAME:
415AE44JX2C203A3(ZH)

For SIP

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	X1