

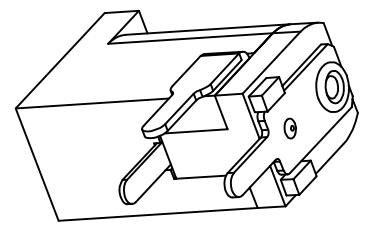


| | |
|------|------|
| PIN | ∅1.3 |
| APPD | ✓ |



Three-dimensional rotation

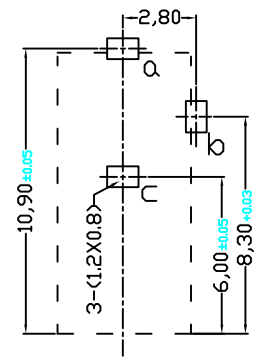

Recommend PCB Layout
PCB Top View

技术要求

- 1、插入力: 2.94 ~ 29.4N(0.3 ~ 3.0kgf)
- 2、拔出力: 2.94 ~ 29.4N(0.3 ~ 3.0kgf)
- 3、接触电阻: ≤30mΩ
- 4、绝缘电阻: >100MΩ DC 500V
- 5、耐电压: AC 500V 1min 漏电流≤1mA, 无飞弧及击穿
- 6、机械寿命: ≤5000 10-20次/min
- 7、额定负载: DC 12V 1A
- 8、使用温度范围: -25 ~ 85°C

Part No.

416A E D C-002X
1 2 3

- 1.SERIES NO.
416A=DC POWER JACK
- 2.GREEN OPTION.
E=RoHS(Bright)
- 3.COLOR OPTION.
002=Black

| | | | | | |
|-----|-----------|----------|-------|--------------|-----------------|
| 6 | PIN | a | 1 | Brass | CuSn-PLATED |
| 5 | Cover | | 1 | PA UL-94V0 | Black or Gray |
| 4 | Housing | | 1 | PA UL-94V0 | Black or Gray |
| 3 | 3#Pin | c | 1 | Mn65 t=0.2 | Ag-PLATED |
| 2 | 2#Pin | b | 1 | Brass t=0.30 | Ag-PLATED |
| 1 | 1#Pin | a | 1 | Brass t=0.30 | Ag-PLATED |
| NO. | PART NAME | TER' NO. | Q' TY | MATERIALOR | PLATING & COLOR |

UNLESS OTHERWISE SPECIFIED TOLERANCE
X : ±0.40 X : ±1°
X.X : ±0.30 X.X : ±0.5°
X.XX : ±0.20
X.XXX : ±0.10



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN UNIT: mm
DRAWN Rita 05/13/2016
CHECKED
APPROVED

DC電源插座
PRODUCT NO. 416AEDC-002X
FILE NAME: 416AEDC-002X(G06)

For SIP

| | | | | |
|------|-------------|------|---------|---------|
| REV. | DESCRIPTION | DATE | SIZE A4 | REV. X3 |
|------|-------------|------|---------|---------|