

技術要求

使用條件: $-40 \sim 80^{\circ}\text{C}$

額定負荷: DC 30V 3.0A

接觸電阻: $\leq 0.03\Omega$

絕緣電阻: $\geq 100\text{M}\Omega$ DC250V

耐壓: AC 500V(50Hz)/min

插拔力: 3~20N

機械壽命: 5000次

Part No.

416A E D C- 005CX
1 2 3

1. SERIES NO.





416A=DC POWER JACK

2. GREEN OPTION.



E=RoHS (Bright)

3. COLOR OPTION.

005C=Black

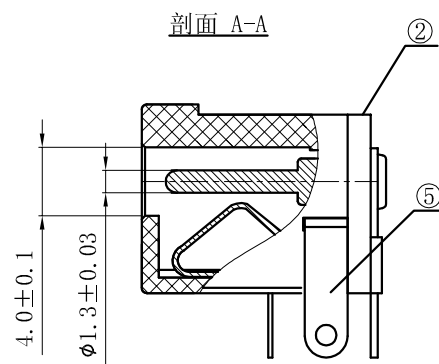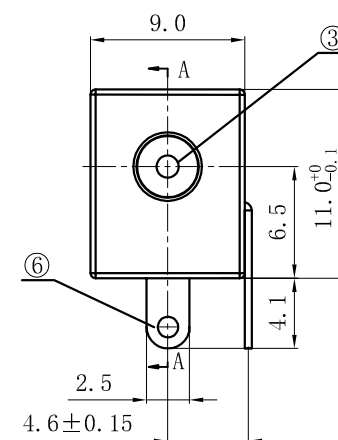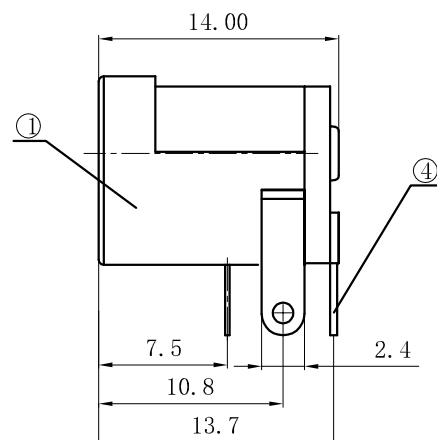

電路結構示意圖

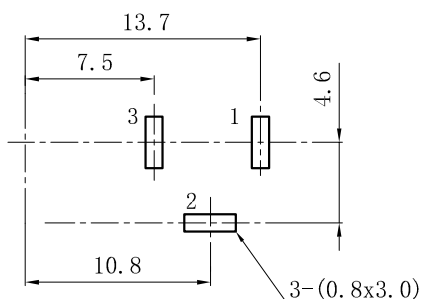

PCB板安裝尺寸示意圖

6	動片	1	磷青銅帶 t=0.25	電鍍:Sn
5	靜片	1	H62 黃銅帶 t=0.30	電鍍:Sn
4	焊片	1	H62 黃銅帶 t=0.30	電鍍:Sn
3	芯柱	1	H65(φ1.3)	電鍍:Ni
2	蓋板	1	PBT4115 UL94V-0	黑色 or 灰色
1	底座	1	PBT4115 UL94V-0	黑色 or 灰色
序號	名稱	數量	材料	電鍍/顏色

UNLESS OTHERWISE SPECIFIED TOLERANCE			 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
60° < Angle	±3			
16 < L	±0.4		SCALE: AS SHOWN	UNIT: mm
4 < L	±0.3		DRAWN Rita	01/08/2018
4 < L	±0.2		CHECKED	
4 < L	±0.1		APPROVED	
			DRAWN NAME: PDR-14018	
			DC電源插座	
			PRODUCT NO. 416AEDC-005C	
			FILE NAME: 416AEDC-005C(G06)	

REV.	DESCRIPTION	DATE