
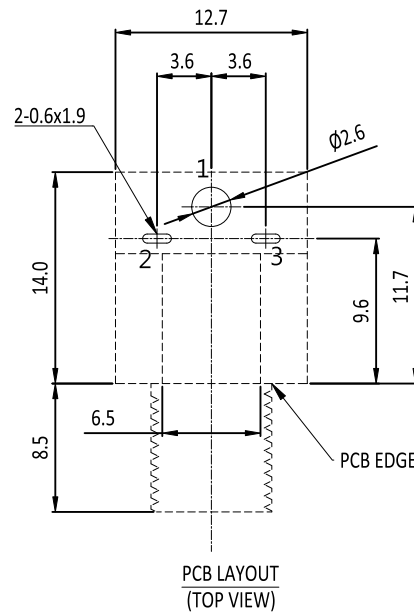
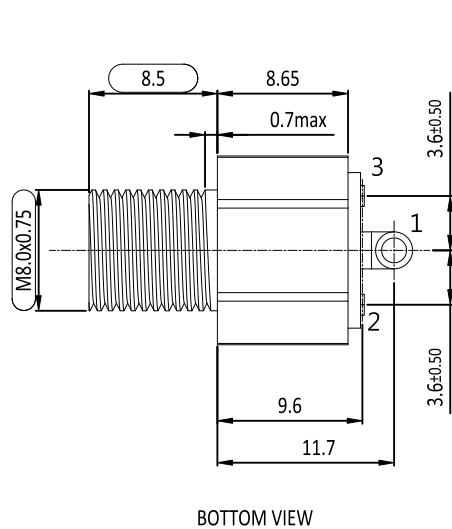
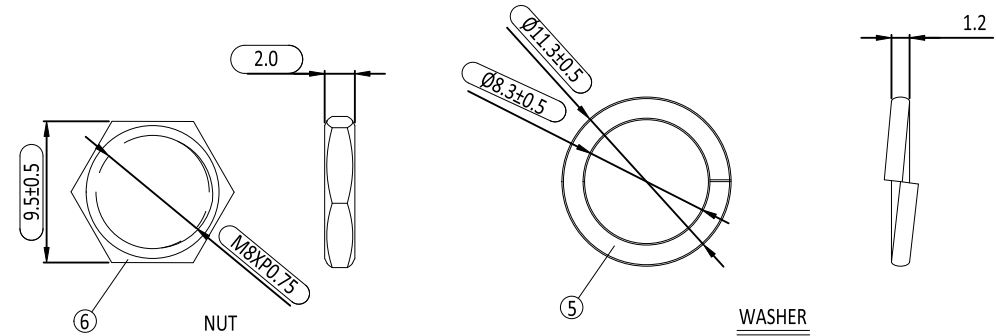
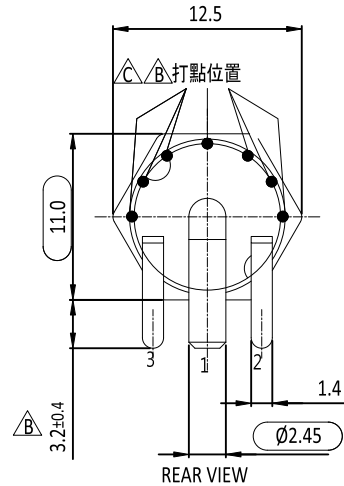


- 1.Dielectric strength: AC 500V/1 minute
- 2.Insulation resistance : 100MΩ or over. (DC 500V)
- 3.Contact resistance : 30mΩ or less
- 4.Extraction force: 0.3~4.0kgf

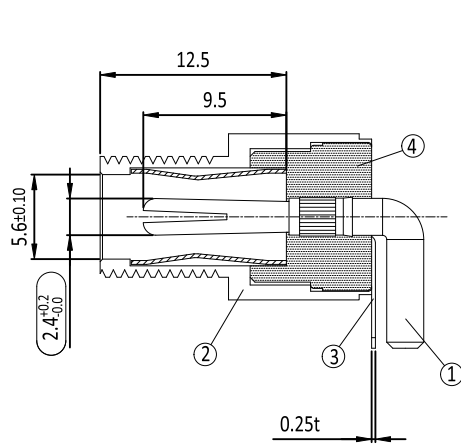

6	NUT	1	H59(COPPER ALLOY)	Cu/Sn PLATED
5	WASHER	1	H59(COPPER ALLOY)	Cu/Sn PLATED
4	DIELECTRIC	1	PBT	BLACK
3	TERMINAL	1	C5191	Ag PLATED
2	SLEEVE	1	H59(COPPER ALLOY)	Cu/Sn PLATED
1	PIN	1	H59(COPPER ALLOY)	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

51702020010		416AEDCD020105B	
NEW P/N		OLD P/N	
UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.3		SIP CmK Cpk	
SCALE: AS SHOWN		UNIT: mm	
DRAWN: BENSON_ZHENG		18 07 2023	
CHECKED: PEARL_HUNG		19 07 2023	
APPROVED: PEARL_HUNG		19 07 2023	
		SIZE A4	SHEET 1/1
REV. C		CODE: J11	CUSTOMER:
TITLE: DC POWER JACK		PART NO. 51702020010	C

G4	C	ECN-2307022(QUEENIE)CHANGED TO SEVEN	07JUL2023
E4,G4,G8	B	ECN-2305081(QUEENIE)	30MAY2023
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8