
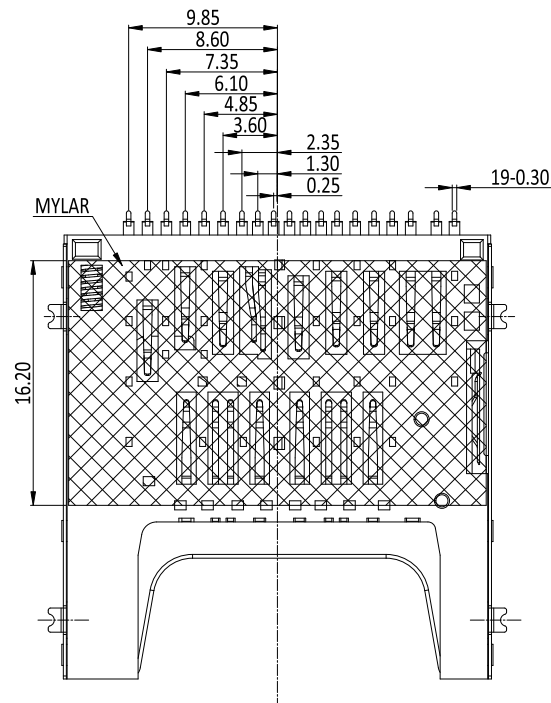


HF
compliant

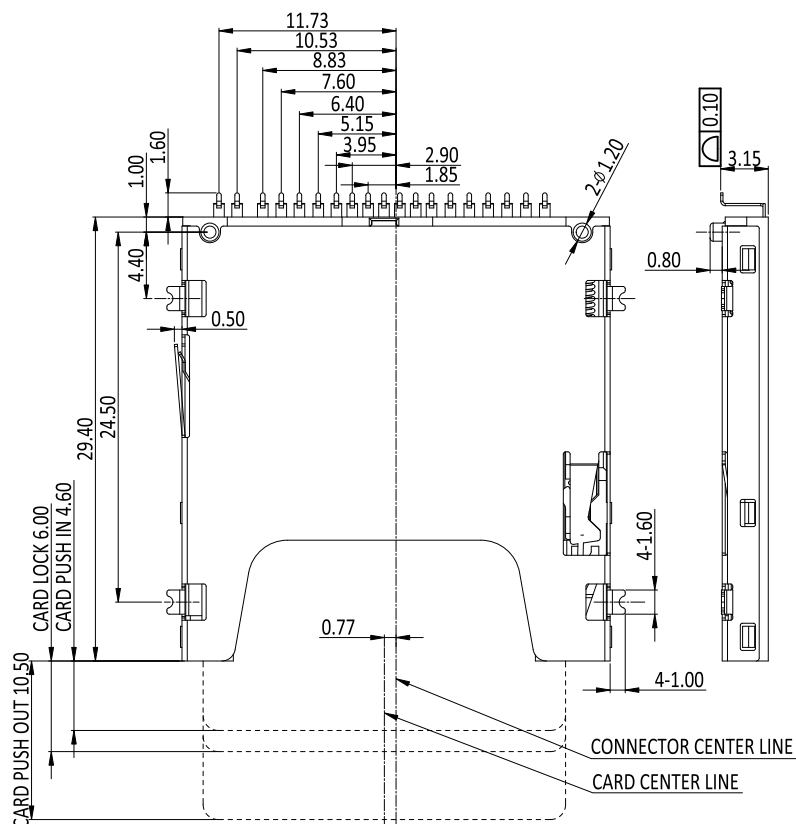

CARD DETECT	7# 8#	7# 8#
	CARD OUT	CARD INSERT
WRITE PROTECT	19# GND#	19# GND#
	WRITE PROTECTED	WRITE ENABLE

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: LCP E130I, RATED UL94V-0, COLOR: BLACK
IR RE-FLOW TEMPERATURE 260±5°C
2. CONTACTS: PHOSPHOR BRONZE,
SN 100u"MIN. AT SOLDER TAIL,
SELECTED AU ON CONTACT AREA PLATING
3. SHELL: STAINLESS OVER NI PLATING

ELECTRICAL CHARACTERISTICS:

1. OPERATING VOLTAGE : 500 V(AC/DC)
2. CURRENT RATING : 1.0 A
3. CONTACT RESISTANCE: 100 mΩ MAX.
4. INSULATION RESISTANCE: 1000 MΩ MIN. AT 250 V DC
5. DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC/1MINUTE

MECHANICAL CHARACTERISTIC:


1. MATING CYCLE: 10000 CYCLES, SPRING IS NOT BREAKING


ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -40°C TO +85°C

PACKING STYLE:

1. TRAY

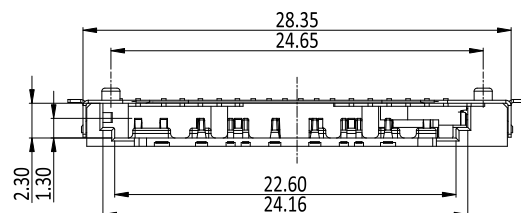

1	57302010010	412DH19HSTS480A3	1u" AU/MATTE SN	W/O MYLAR
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD	
ANG. ±5°		 Cmk Cpk		
0. ±0.35				
.0 ±0.30				
.00 ±0.25				
SCALE: AS SHOWN		UNIT: mm	TITLE: SD 4.0 CARD PUSH CONN. (REVERSE TYPE)	
DRAWN: SUNNY_LIU		17 Apr 2024		
CHECKED: PEARL_HUNG		18 Apr 2024		
APPROVED: PEARL_HUNG		18 Apr 2024		
	SIZE A4	SHEET 1/3	REV. D	PART NO. 5730201XXXX
7		8	9	10
CODE: J03		CUSTOMER:		


D	ECN-2404027(JOLIN)ADD NEW P/N	10APR2024
C	ECN-20B032(CHICHI)SEE PAGE 2/2	13NOV2020
B	ECN-197027(CHICHI)ADD PAGE 2/2 包裝圖	11JUL2019
ZONE	REVISION	DESCRIPTION
		DATE

HF
compliant



PIN DEFINE:

PIN#	NAME	DESCRIPTION	PIN#	NAME	DESCRIPTION
1	VSS3	GROUND	11	VDD1	SUPPLY VOLTAGE
2	DAT2	DATA LINE BIT2	12	D1-	DIFFERENTIAL DATE 1-
3	D0+	DIFFERENTIAL DATE 0+	13	CLK	CLOCK
4	CD/DAT3	CARD DETECT/DATA LINE BIT3	14	D1+	DIFFERENTIAL DATE 1+
5	D0-	DIFFERENTIAL DATE 0-	15	VSS2	SUPPLY VOLTAGE GROUND
6	CMD	COMMAND/RESPONSE	16	VSS5	GROUND
7	CD	CARD DETECT	17	DAT0	DATE LINE BIT0
8	VSS1	SUPPLY VOLTAGE GROUND	18	DAT1	DATE LINE BIT1
9	VSS4	GROUND	19	WP	WRITE PROTECT
10	VDD2	SUPPLY VOLTAGE(1.8V)			

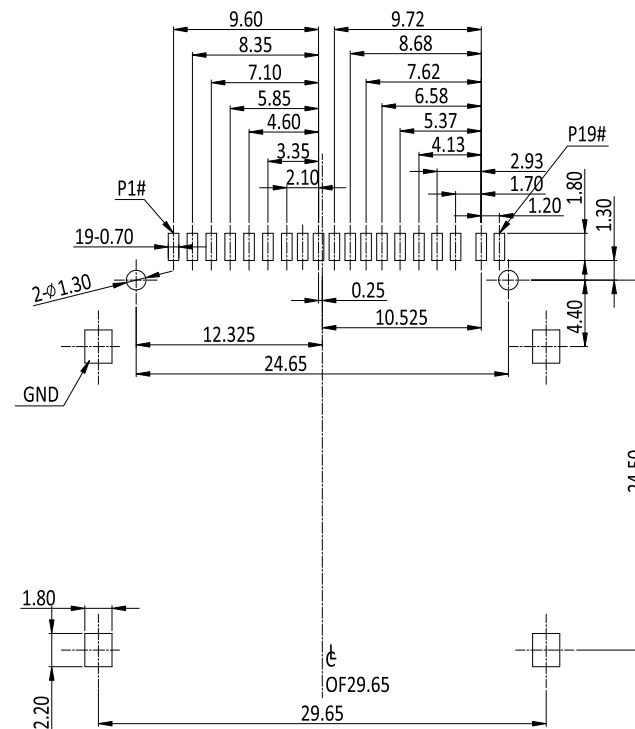


RECOMMEENDER PCB LAYOUT

TOLERANCE UNLESS OTHERWISE IS ± 0.05


UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. $\pm 5^\circ$ 0 ± 0.50 .0 ± 0.30 .00 ± 0.20		SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm	TITLE: SD 4.0 CARD PUSH CONN. (REVERSE TYPE)	
DRAWN: SUNNY_LIU		17 Apr 2024		
CHECKED: PEARL_HUNG		18 Apr 2024	PART NO. 5730201XXXX	
APPROVED: PEARL_HUNG		18 Apr 2024	CODE: J03 CUSTOMER:	
	SIZE A4	SHEET 2/3	REV. D	

	D	ECN-2404027(JOLIN)ADD PAGE 2/3	10APR2024		
ZONE	REVISION	DESCRIPTION	DATE		
1	2	3	4	5	6


- 一.
- 1) 將成品一一放入包裝盤內,依同一方向放入
 - 2) 包裝時,如圖所示
 - 3) 一個包裝盤放置 40 個成品

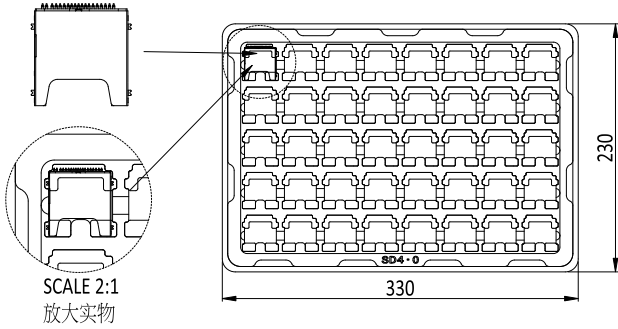



- 二.
- 1) 將放滿成品的包裝盤依同一方向一層層疊好
 - 2) 如圖所示
 - 3) 1扎放31個吸塑盒,最上面一個作為上蓋不放置成品
 - 4) 每扎1200PCS 產品

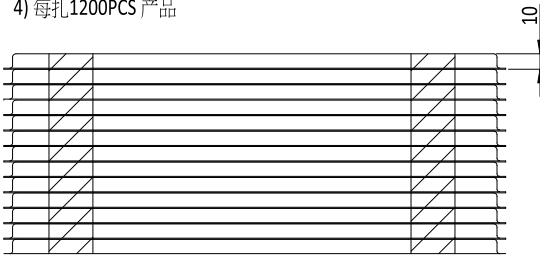

- 三.
- 1) 將1扎產品放置在PE帶內
 - 2) PE袋內上下面各放一包乾燥劑
 - 3) 外箱四角各放一個紙護角板,包裝完後裝箱

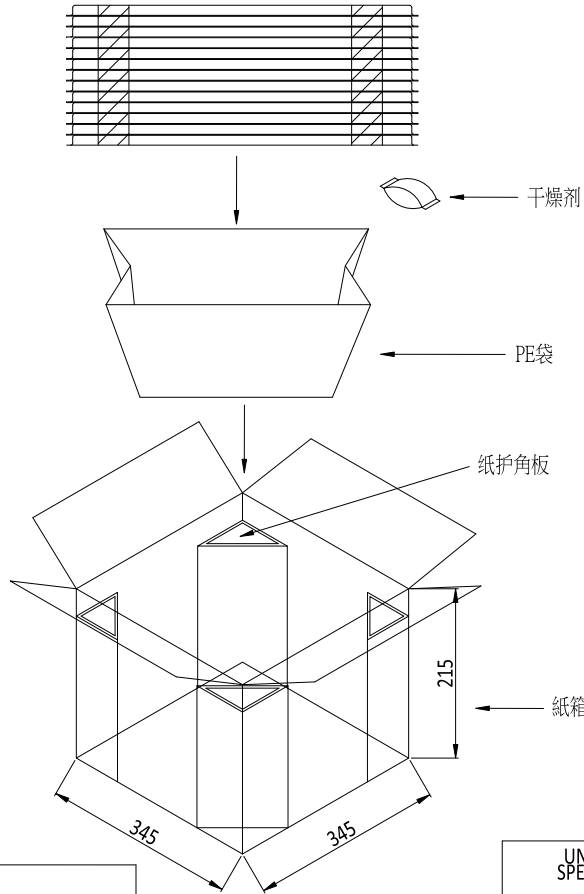

- 四.
- 1) 用TAPE將紙箱封實

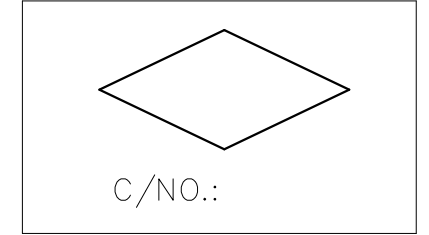


備註 (REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿

3	吸盤	330x230x10mm PVC透明 T=0.4 ROHS		
2	紙護角板	120x75x200mm K=K ROHS	4 PC/CARTON	
1	紙箱	345x345x215mm K=K ROHS	1 PC/CARTON	

ITEM	DESCRIPTION	SPECIFICATION	AMOUNT	NOTE
		D	ECN-2404027(JOLIN)SEE PAGE 1/3	10APR2024
	C8	C	ECN-20B032(CHICHI)ADD TRAY HEIGHT	13NOV2020
		B	ECN-197027(CHICHI)ADD PAGE 2/2 包裝圖	11JUL2019
	ZONE	REVISION	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD		
ANG.	±5°	 Cmk Cpk			
0.	±0.50				
.0	±0.30				
.00	±0.20				
SCALE: AS SHOWN		UNIT: mm	TITLE: SD 4.0 CARD PUSH CONN. (REVERSE TYPE)		
DRAWN: SUNNY_LIU		17 Apr 2024			
CHECKED: PEARL_HUNG		18 Apr 2024			
APPROVED: PEARL_HUNG		18 Apr 2024	PART NO. 5730201XXXX		
	SIZE A4	SHEET 3/3	REV. D	CODE: J03	CUSTOMER: