

POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	INTERFACE DIM. L	PIN NO.

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE

2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATED: 50u"~100u" NI

CONTACT AREA: 1u"~30u" SELECTIVE AU




SOLDER TAILS AREA: 100u"~200u" MATTE SN

3. SHELL: STEEL


4. RIVET, BOARDLOCK: COPPER ALLOY


ELECTRICAL CHARACTERISTIC:

1. RATED VOLTAGE: 35V/AC MAX.

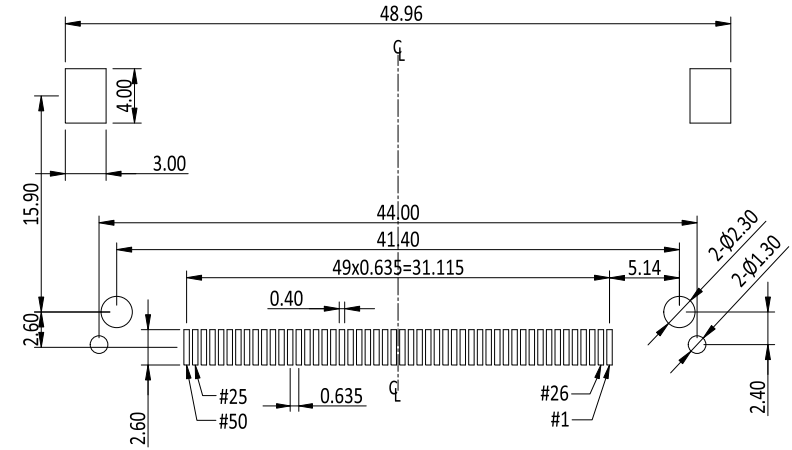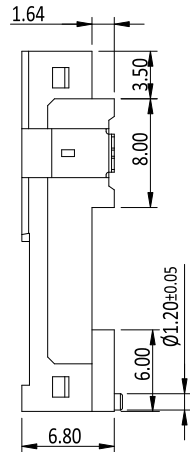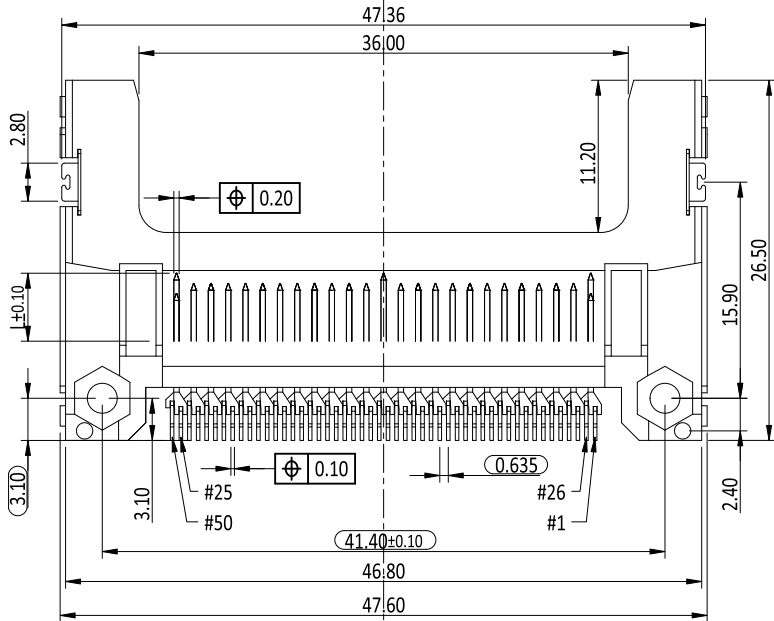

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm



2					
1	57523010010	752DF50NC00001	15u" AU	W/O NUT	
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD		
ANG. ±5° 0. ±0.5 0 ±0.3 .00 ±0.2					
SCALE: AS SHOWN		UNIT: mm			
DRAWN: XINGRU_LAI		TITLE: CFA TYPE 1 (W/O GROUNDING EXT.) STANDARD TYPE(STANDOFF 1.64)			
CHECKED: PEARL_HUNG		02 Apr 2024		PART NO. 57523010010	
APPROVED: PEARL_HUNG		02 Apr 2024			
	SIZE A4	SHEET 1/1	REV. E	CODE: GA	CUSTOMER:
7		8		10	



TITLE:
CFA TYPE 1 (W/O GROUNDING EXT.)
STANDARD TYPE(STANDOFF 1.64)

E	ECN-2403082(JOLIN)NEW P/N	27MAR2024
D	ECN-17100040(QUEENIE)	26OCT2017
C	ECN-0707244(JOCELYN)	26JUL2007
ZONE	REVISION	DESCRIPTION
1	2	3
4	5	6