

RoHS
compliant



SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE






2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATE: 50u"~100u" NI

CONTACT AREA: 1u"~30u" SELECTIVE AU

SOLDER TAILS AREA: 100u"~200u" MATTE SN


3. MOUNT EAR: COPPER ALLOY

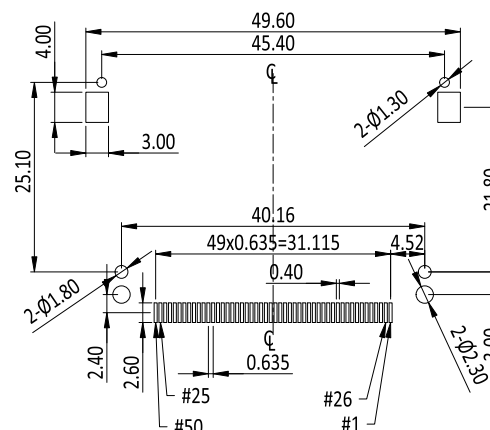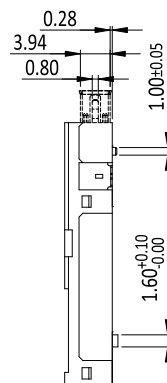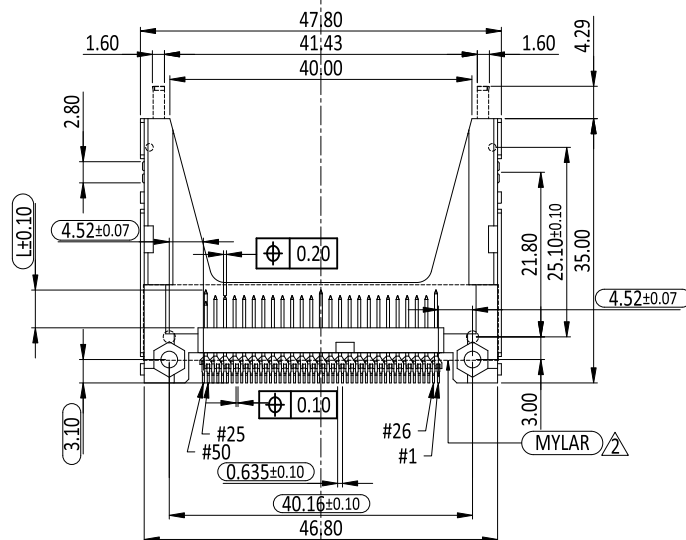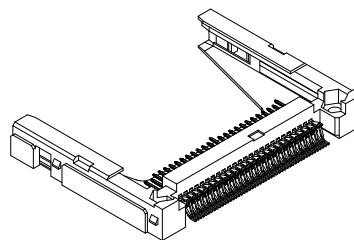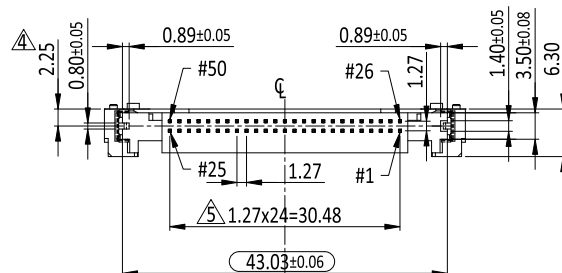

RECOMMENDED P.C.B LAYOUT

TOLERANCES: ±0.05mm

POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	INTERFACE DIM. L	PIN NO.

1	57523030010	752DF50BC10011	15u" AU	W/O NUT, W/O MYLAR
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0 ±0.5 0 ±0.3 .00 ±0.2		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		02 Apr 2024	TITLE: CFA TYPE 2 (W/GROUNDING EXT.) STANDARD TYPE (STANDOFF 0)	
CHECKED: PEARL_HUNG		02 Apr 2024		
APPROVED: PEARL_HUNG		02 Apr 2024	PART NO.	57523030010
	SIZE A4	SHEET 1/1	REV. J	CODE: GA
			CUSTOMER:	

J	ECN-2403079(JOLIN)NEW P/N	27MAR2024
I	ECN-1108047(CHERRY)	08SEP2011
H	ECN-1011036(修改為之前F版, 由實物修改圖面)	10OCT2010
ZONE	REVISION	DESCRIPTION
1	2	3

1 2 3 4 5 6 7 8 9 10