

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE

2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATE: 50u"~100u" NI


CONTACT AREA: 1u"~30u" AU

SOLDER TAILS AREA: 100u"~200u" SN(MATTE)


3. PIVOT SHELL: STAINLESS STEEL


4. MOUNT EAR: COPPER ALLOY

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25,26
PIN TYPE	DIM. L	PIN NO.

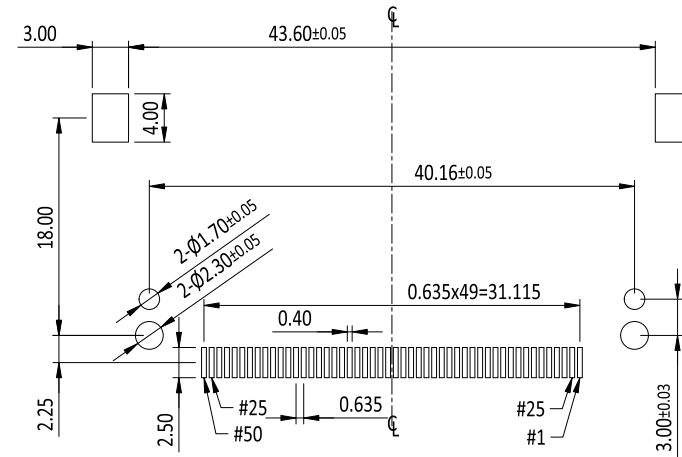

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

1	57524010010	752D02F50CRD00P	15u" AU	41.30	0.15±0.12	W/ O NUT
ITEM	NEW P/N	OLD P/N	CONTACT AREA	DIM. L	DIM. X	PART OPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5 0 ±0.5 0 ±0.3 .00 ±0.2		 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm				
DRAWN: XINGRU_LAI		08 Apr 2024		TITLE: CFA TYPE 2 STANDARD TYPE (STANDOFF 0mm)		
CHECKED: PEARL_HUNG		02 May 2024				
APPROVED: PEARL_HUNG		02 May 2024		PART NO. 57524010010		
	SIZE A4	SHEET 1/1	REV. C	CODE: GA		CUSTOMER:
7		8		9		10

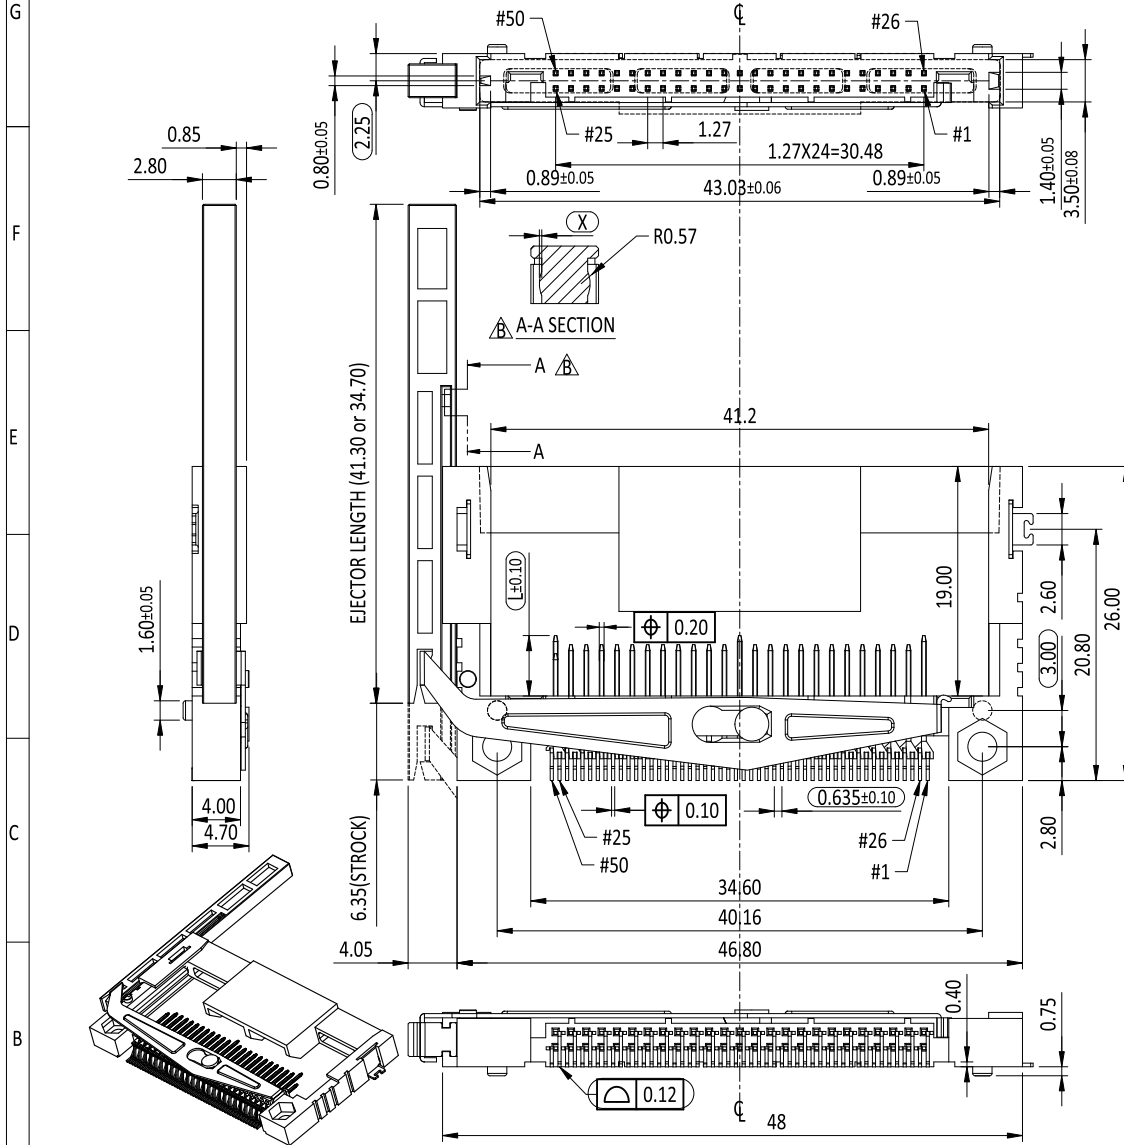

	C	ECR-2403084(JOLIN)NEW P/N	22MAR2024
(3,E)	B	ECN-0802089(ALEX)	18FEB2008
	A	ECN-0707245(ALEX)	25JUL2007
ZONE	REVISION	DESCRIPTION	DATE