

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE

2. CONTACTS: COPPER ALLOY



PLATING: UNDERPLATE: 50U"~100U" NI

CONTACT AREA: 1U"~30U" SELECTIVE AU




SOLDER TAILS AREA: 100U"~200U" SN(MATTE)

3. PIVOT SHELL: STAINLESS STEEL



4. MOUNT EAR: COPPER ALLOY

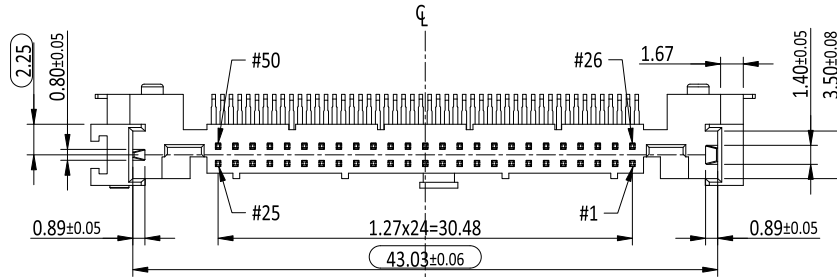


POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	DIM. L	PIN NO.

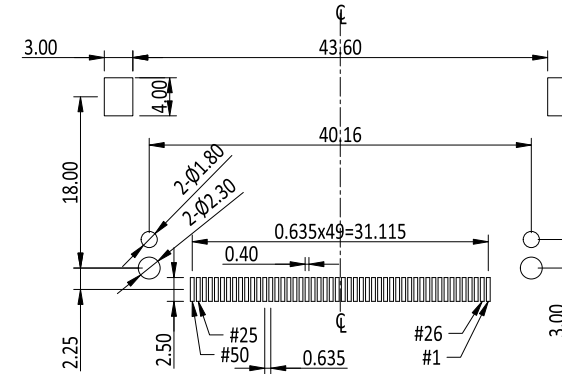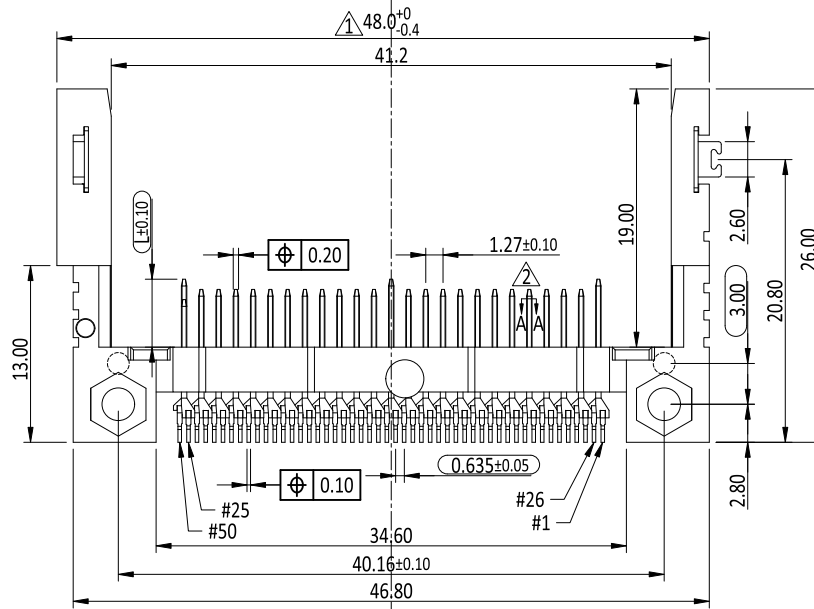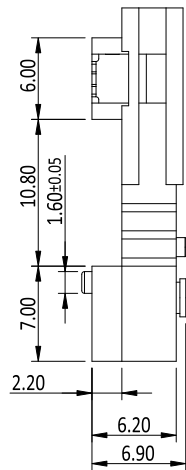

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

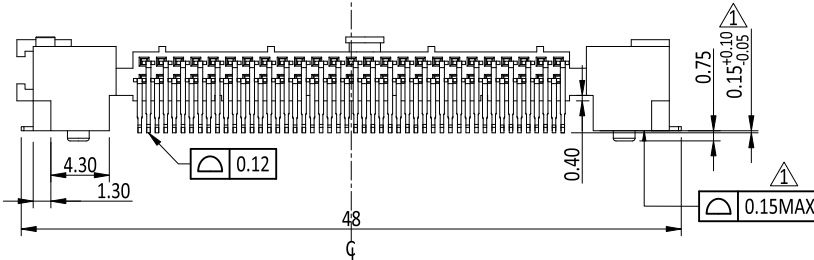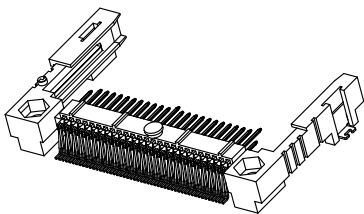

2				
1	57524020010	752D02F50CAD301	15u" AU	W/O NUT
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD	
ANG. ±5°		 Cmk Cpk		
0 ±0.5				
0 ±0.3				
.00 ±0.2				
SCALE:	AS SHOWN	UNIT: mm		
DRAWN:	XINGRU_LAI	08 Apr 2024	TITLE: CFA TYPE 2 STANDARD TYPE (STANDOFF 2.2mm)	
CHECKED:	PEARL_HUNG	02 May 2024		
APPROVED:	PEARL_HUNG	02 May 2024	PART NO.	57524020010
	SIZE A4	SHEET 1/1	REV. D	CODE: GA
	7		8	
				9
				10

D	ECN-2403084(JOLIN)NEW P/N	27MAR2024
(F,1)(D,5)	C	ECN-1403034(RAFFY)
(E,4)(B,6)	B	ECN-0809025(LUKE)
ZONE	REVISION	DESCRIPTION
1	2	3
4	5	6