

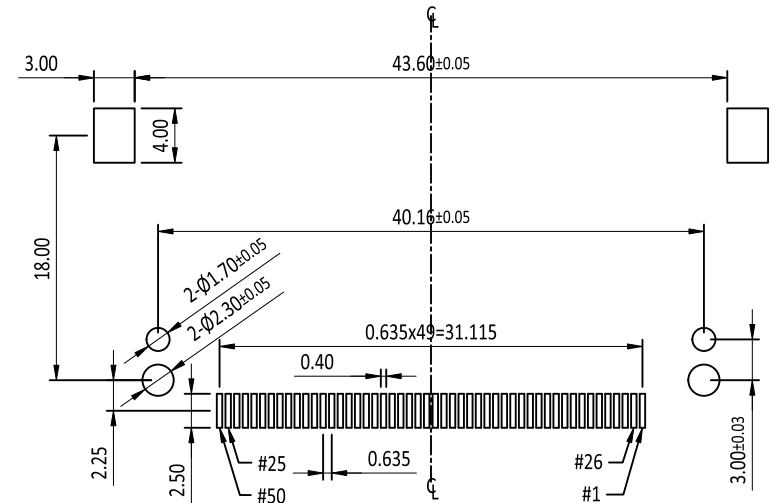
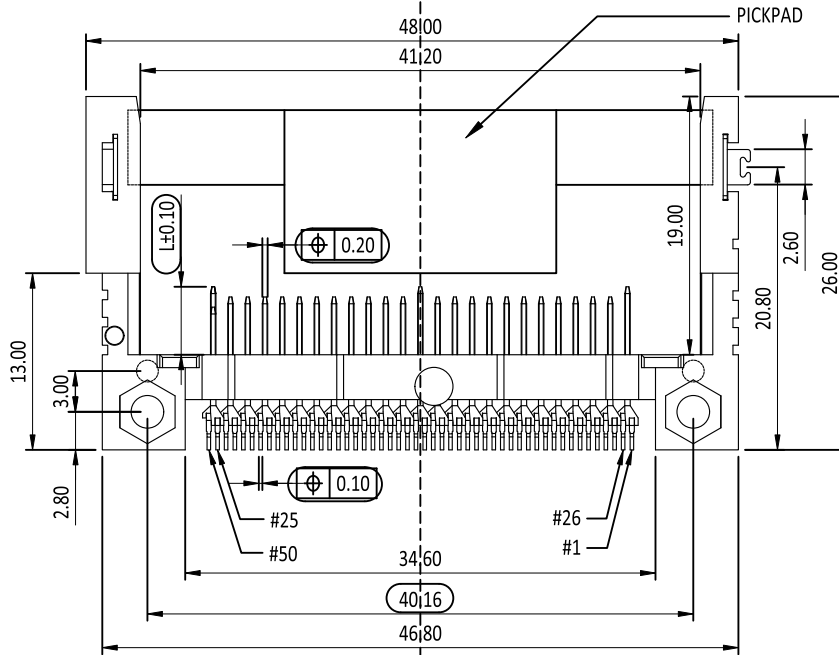




SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE+PICKPAD
2. CONTACTS: COPPER ALLOY
PLATING: UNDERPLATE: 50u"~100u" NI
CONTACT AREA: 1u"~30u" SELECTIVE AU
SOLDER TAILS AREA: 100u"~200u" SN(MATTE)
3. SHELL: STAINLESS STEEL
4. MOUNT EAR: COPPER ALLOY

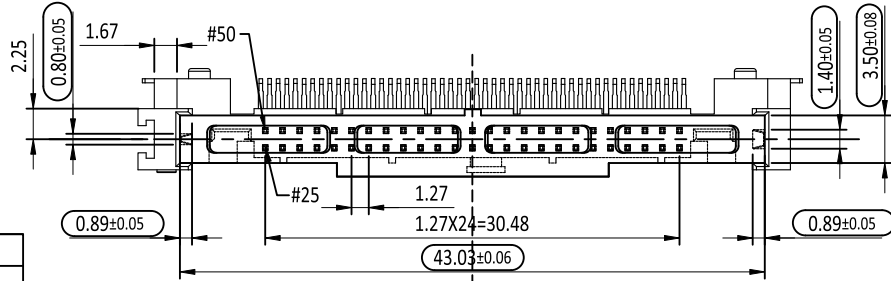

PIN TYPE	DIM. L	PIN NO.
POWER	5.00 mm	1, 13, 38, 50
GENERAL	4.25 mm	ALL OTHER PIN
DETECT	3.50 mm	25, 26

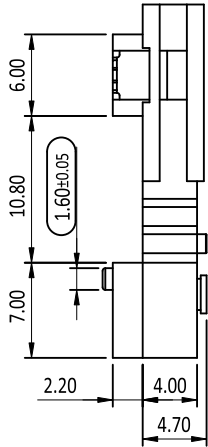

RECOMMENDED P.C.B. LAYOUT
TOLERANCES: ±0.05mm

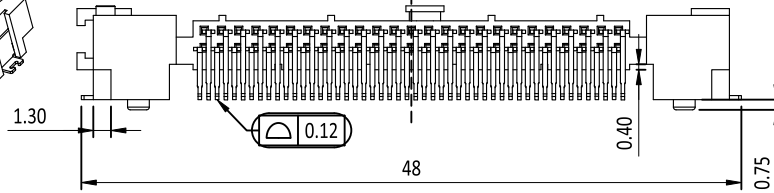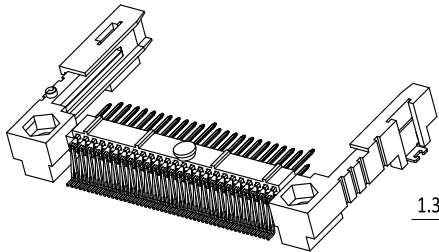

2				
1	57524030010	752D02F50CAD30P	15u" AU	W/O NUT
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.5 0 ±0.3 .00 ±0.2		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		08 Apr 2024		
CHECKED: PEARL_HUNG		02 May 2024		
APPROVED: PEARL_HUNG		02 May 2024	TITLE: CFA TYPE 2 STANDARD TYPE (STANDOFF 2.2mm)	
			PART NO. 57524030010	
		SIZE A4	SHEET 1/1	REV. D
7		8		9
				10

	D	ECN-2403086(JOLIN)NEW P/N	28MAR2024
(1,F)	C	ECN-0812163(JOE)	12DEC2008
	B	ECN-0712215(JOANNA)	18DEC2007
ZONE	REVISION	DESCRIPTION	DATE