


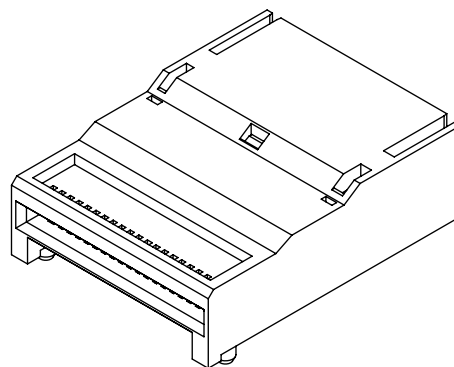

SPECIFICATION

MATERIAL AND FINISH:




1. HOUSING: LCP E6808 UHF, UL94V-0 
2. INSULATOR: LCP E6808 UHF, UL94V-0 
3. CONTACT: PHOSPHOR BRONZE
PLATING CONTACT AREA: 30u" AU
SOLDER AREA: 200~300u" SN (MATTE)
UNDERPLATE: 50~100u" NI

ELECTRICAL CHARACTERISTIC:

1. OPERATING CURRENT: 0.5A PER CONTACT
2. WORKING VOLTAGE 30 VDC PER CONTACT

MECHANICAL CHARACTERISTIC:

- MECHANICAL CHARACTERISTICS:
1. DURABILITY: ≥ 100 CYCLES
 2. OPERATING TEMPERATURE RANGE: -40°C TO $+85^{\circ}\text{C}$

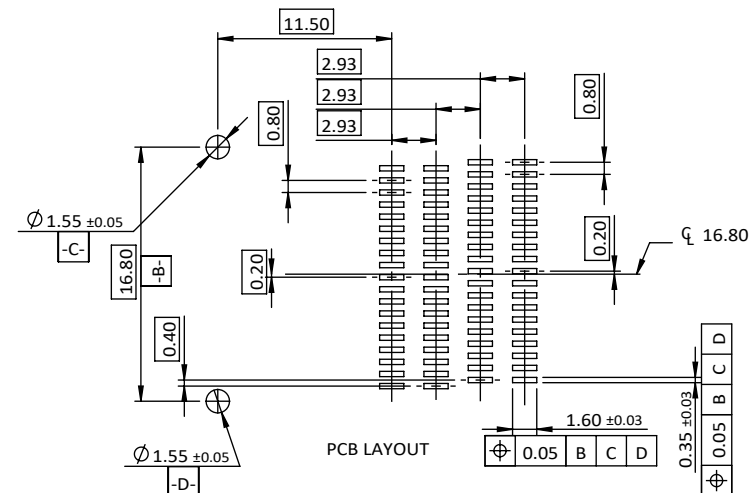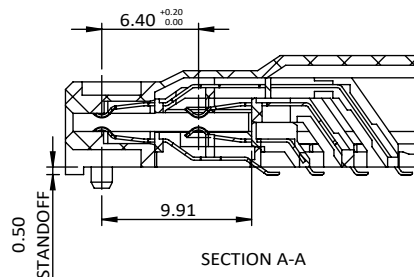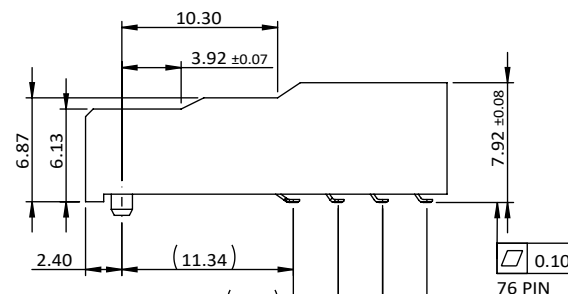

	A	ECN-2401081(CHERRY)X2 CHANGE TO A	20JAN2024
G9	x2	CHANGE MATERIAL	06FEB2023
ZONE	REVISION	DESCRIPTION	DATE