
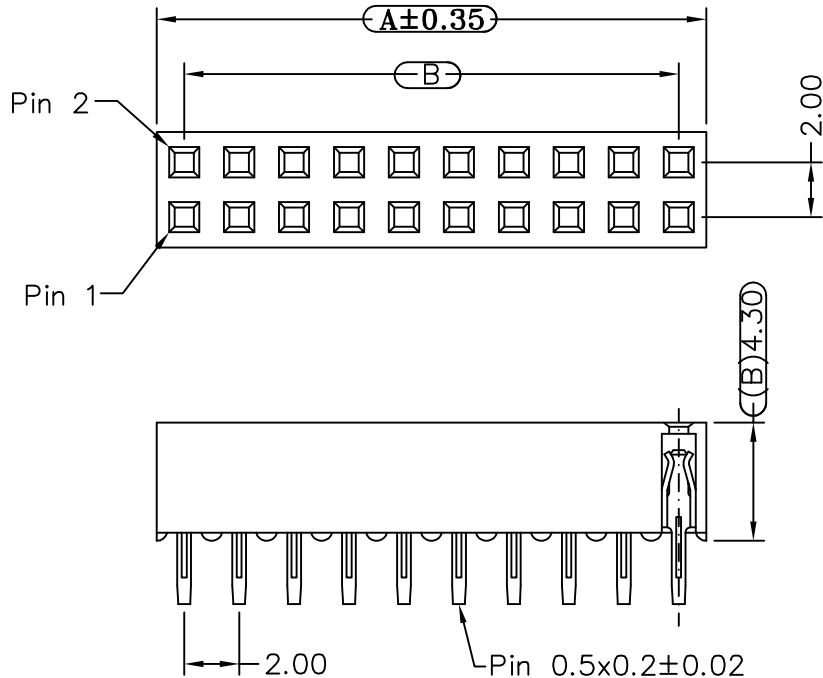


Recommended P.C.B Layout



POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	42.00	40.00
2	4.00	2.00	22	44.00	42.00
3	6.00	4.00	23	46.00	44.00
4	8.00	6.00	24	48.00	46.00
5	10.00	8.00	25	50.00	48.00
6	12.00	10.00	26	52.00	50.00
7	14.00	12.00	27	54.00	52.00
8	16.00	14.00	28	56.00	54.00
9	18.00	16.00	29	58.00	56.00
10	20.00	18.00	30	60.00	58.00
11	22.00	20.00	31	62.00	60.00
12	24.00	22.00	32	64.00	62.00
13	26.00	24.00	33	66.00	64.00
14	28.00	26.00	34	68.00	66.00
15	30.00	28.00	35	70.00	68.00
16	32.00	30.00	36	72.00	70.00
17	34.00	32.00	37	74.00	72.00
18	36.00	34.00	38	76.00	74.00
19	38.00	36.00	39	78.00	76.00
20	40.00	38.00	40	80.00	78.00

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

PART NO.

604 A X XX S X M 1 02 0 B 3
1 2 3 4 5 6 7 8 9 10 11 12

1.SERIES NO.

2.TYPE:

A=DIP

3.GREEN OPTION:

E=RoHS

4.CONTACT NO:

02~80

5.CONTACT TYPE:

S=FEMALE(PA6T)

6.CONTACT PLATING:

T=Tin Plated

G=Gold Flash 1u"

7.ROW TYPR:

M=Dual Row(Insulator Height: 4.3mm/each)

8.CONTACT OPTION:

1=Straight(Y Contact)

9.CONTACT OPTION:

02=Customer Design

10.Contact OPTION:

0=W/O NOSE(Fully Loaded)

11.INSULATOR:

B=Tube

12.INSULATOR:

3=Black

For SIP

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG. =±3°

.0 =±.30

.00 =±.20

SCALE: AS SHOWN UNIT: mm

DRAWN RITA 03/30/2015

CHECKED / /

APPROVED / /

SIZE A4 REV. X2



CHANT SINCERE CO.,LTD

TEL: 886-02-86471251 FAX: 886-02-86472962

DRAWN NAME:

Female Header (2.0*2.0 mm)

PRODUCT NO. 604AXXXSXM1020B3

FILE NAME: 604AXXXSXM1020B3(P)

REV.

DESCRIPTION

DATE