




2.0 * No.of Contacts/2 +0.85

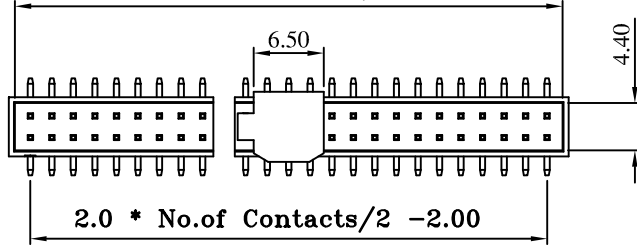



2.0 * No.of Contacts/2 + 2.00

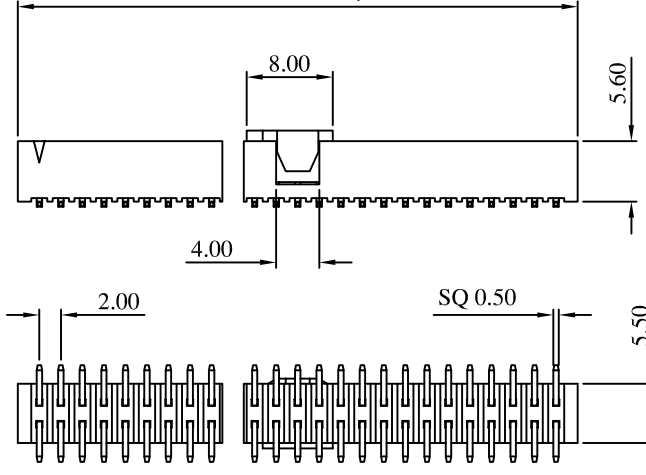

2.0 * No.of Contacts/2 -2.00

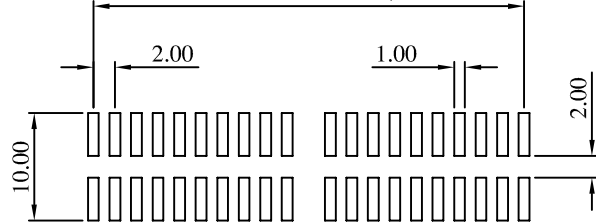

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

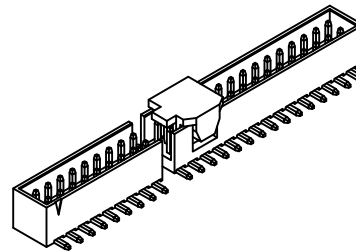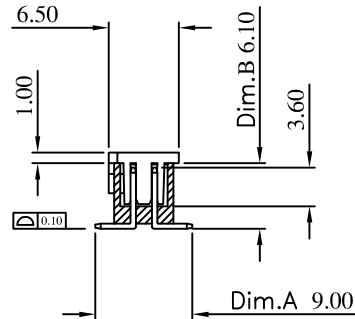

Current Rating: 2 Amps
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20m ohms max.
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester,UL 94V-0
Standard: Nylon-6T

Finish: Gold Plated

PART NO.

608 D E XX P X C X X B 3
1 2 3 4 5 6 7 8 9 10 11

- 1.SERIES NO.
2.TYPE:
D=SMT
3.GREEN OPTION
E=RoHS
4.CONTACT NUMBER:
06 ~ 68
5.CONTACT TYPE:
P=Non Distribution
6.CONTACT AREA PLATING:
G=Gold Flash
- 7.FUNCTION:
C=PA6T
8.PAD OPTION:
A=W/O Pad
B=W/Pad
9.PACKING OPTOIN:
B=Tube
C=Tape Reel
10.INSULATOR OPTION
B=Fully Loaded
(SMT=9.0mm)
11.INSULATOR COLOR:
3=Black

UNLESS OTHERWISE SPECIFIED TOLERANCE			
.X ±0.3			
.XX ±0.20			
.XXX ±0.100			
SCALE:	AS SHOWN	UNIT:	mm
DRAWN	Vicky	10/03/12	
CHECKED	/	/	
APPROVED	/	/	
		SIZE	A4
		REV.	B
		FILE NAME:	
		608DEXXPXCXXB3(C6)	



CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME:
BOX HEADER SMT
PITCH=2.0mm

PRODUCT NO. 608DEXXPXCXXB3

FILE NAME: 608DEXXPXCXXB3(C6)

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	B	608DEXXPXCXXB3(C6)