

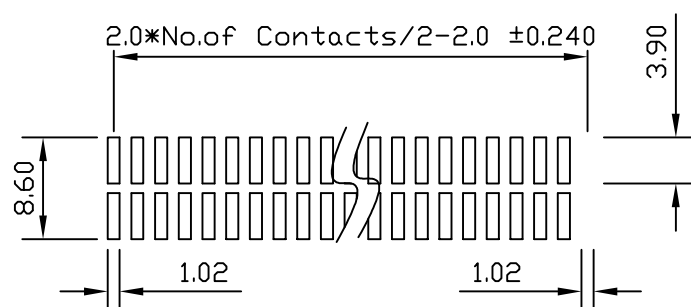
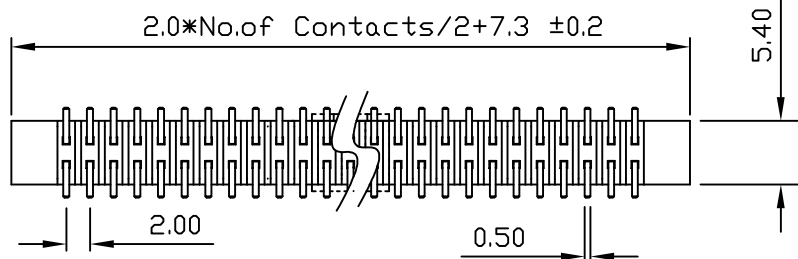
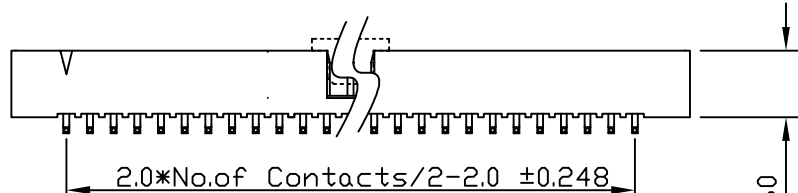


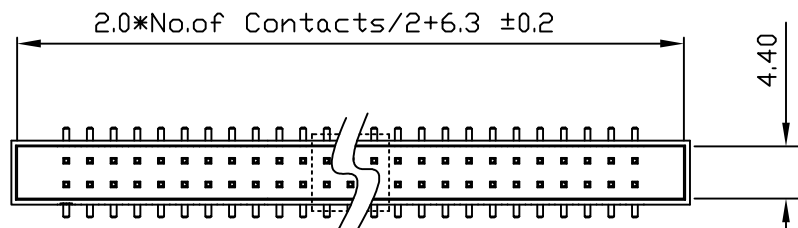

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

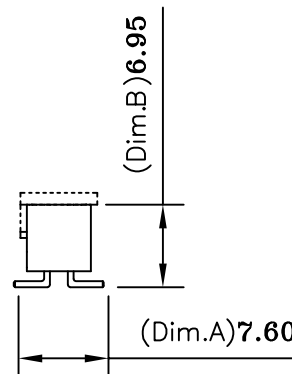

Current Rating: 1 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 500 V
Operating Temperature: -40° ~ +85° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: PA6T

Finish: Gold Plated

PART NO.

608 D X XX P X C X X A 3
1 2 3 4 5 6 7 8 9 10 11

- | | |
|---|---------------------------------------|
| 1.SERIES NO. | 7.FUNCTION: |
| 2.TYPE:
D=SMT | C=PA6T |
| 3.ENVIRONMENT PROTECTION
MATERIAL.
E=RoHS | 8.PAD OPTION:
A=W/O Pad
B=W/Pad |
| 4.CONTACT NUMBER:
04 ~ 80 | 9.PACKING OPTION:
A=Tray
B=Tube |
| 5.CONTACT TYPE:
P=Non Distribution | 10.INSULATOR OPTION
A=Fully Loaded |
| 6.CONTACT AREA PLATING:
G=Gold Flash | 11.INSULATOR COLOR:
3=Black |

UNLESS OTHERWISE SPECIFIED TOLERANCE			
±0.2			
SCALE: AS SHOWN	UNIT: mm	 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
DRAWN JOE	04/25/08		
CHECKED	/ /		
APPROVED	/ /		
		DRAWN NAME: BOX HEADER SMT PITCH=2.0mm	
		PRODUCT NO. 608DXXXPCXXA3	
		FILE NAME: 608DFXXPCXXA3(C6)	

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	G