






Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40° ~ +85° C
 Max Processing Temp: 230°C for 60 seconds
 Max Processing Temp: 260°C for 10 seconds
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Gold Plated
 Standard: Gold Flash all over


PART NO.

708 D X XXX X X A1 A X B 3
 1 2 3 4 5 6 7 8 9 10 11

- | | |
|--|--------------------------------|
| 1.SERIES NO. | 7.TYPE: |
| 2.TYPE:
D=SMT | A1 Type |
| 3.ENVIRONMENT PROTECTION
MATERIAL:
E=RoHS | 8.INSULATOR HEIGHT
A=5.8mm |
| 4.CONTACT NUMBER:
6~100Pin | 9.PROCESS OPTION:
0=W/0 Peg |
| 5.CONTACT AREA PLATING:
G=Gold FLASH | 10.PACK OPTION:
B=Tube |
| 6.SOLER TAIL PLATING:
T=100u" Tin
S=1u" Gold | 11.INSULATOR COLOR:
3=Black |

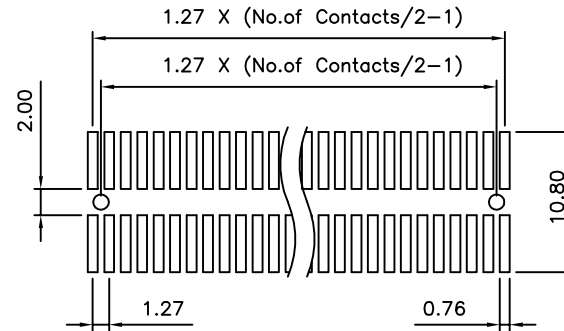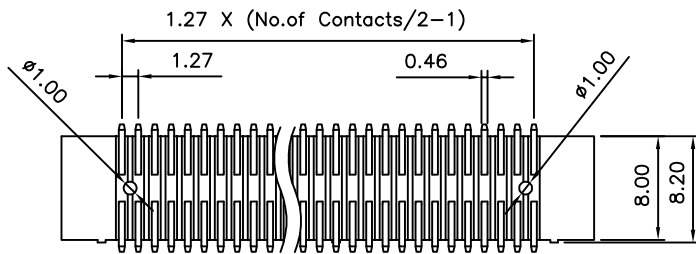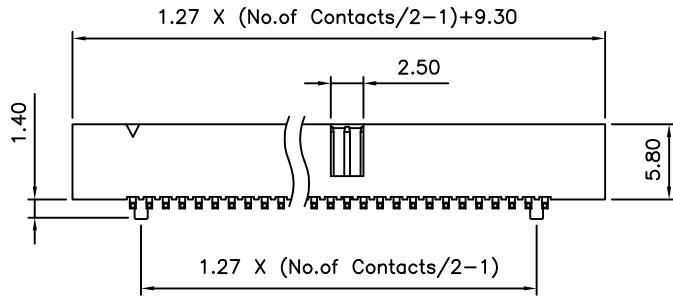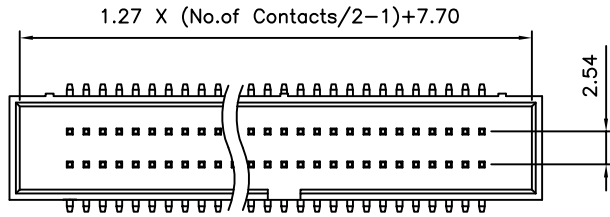

RECOMMENDED P.C.B LAYOUT
 TOLERANCES: ±0.05mm

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO., LTD TEL:886-02-86471251 FAX:886-02-86472962	
±0.2			
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME:	
DRAWN PEARL	05/17/07	BOX HEADER	
CHECKED	/ /	PITCH: 1.27mm*2.54mm	
APPROVED	/ /	PRODUCT NO: 708DXXXXXXA1AXB3	
REV.	DESCRIPTION	DATE	FILE NAME: 708DFXXXXXA1A1B3(C6)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		