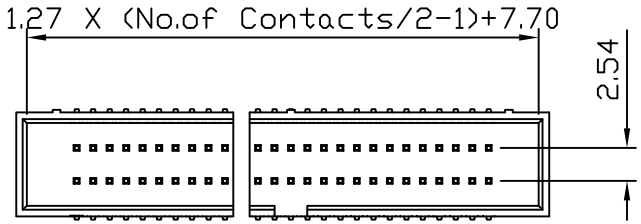

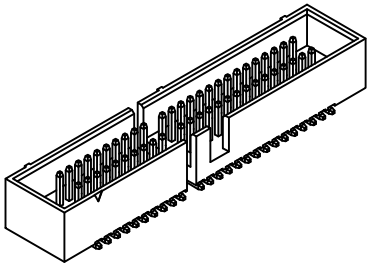

Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500 V
Operating Temperature: −40°~+85°C
Max Processing Temp: 230°C for 60 seconds
Max Processing Temp: 260°C for 10 seconds
Contact Material: Brass
Insulator Material: Polyester,UL 94V−0
Standard: Nylon−6T

Finish: Gold Plated
Standard: Gold Flash all over

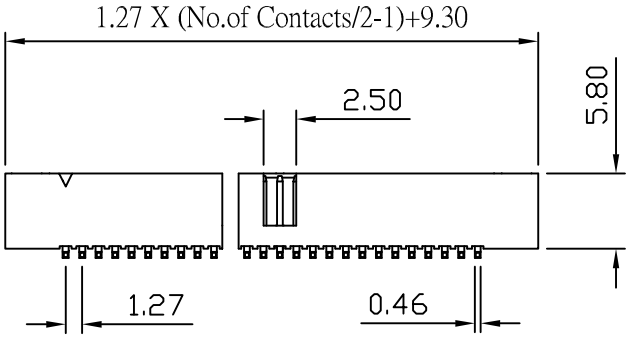

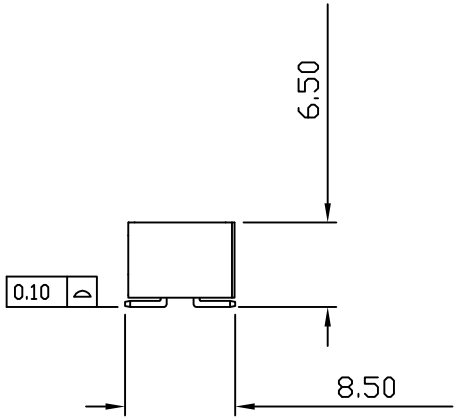

PART NO.

708	D	X	XXX	X	X	A1	B	0	B	3
1	2	3	4	5	6	7	8	9	10	11

1.SERIES NO.
2.TYPE:
D=SMT
3.ENVIRONMENT PROTECTION MATERIAL:
E=RoHS
4.CONTACT NUMBER:
6~100Pin
5.CONTACT AREA PLATING:
G=Gold FLASH
6.SOLER TAIL PLATING:
S=1u" Gold
7.TYPE:
A1 Type
8.INSULATOR HEIGHT
B=5.8mm(SMT8.5mm)
9.PROCESS OPTION:
0=W/O Peg
10.PACK OPTION:
B=Tube
11.INSULATOR COLOR:
3=Black

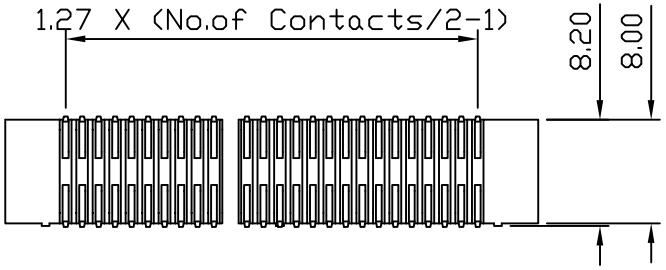

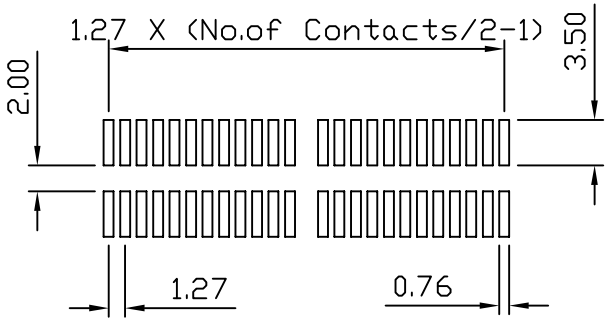

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

REV.	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.2			CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
SCALE: AS SHOWN	UNIT: mm		
DRAWN PEARL	02/13/08	DRAWN NAME: BOX HEADER PITCH: 1.27mm*2.54mm	
CHECKED	/ /		
APPROVED	/ /	PRODUCT NO. 708DXXXXXXA1B0B3	
	SIZE A4	REV. A	FILE NAME: 708DFXXXXXA1B0B3(C6)