

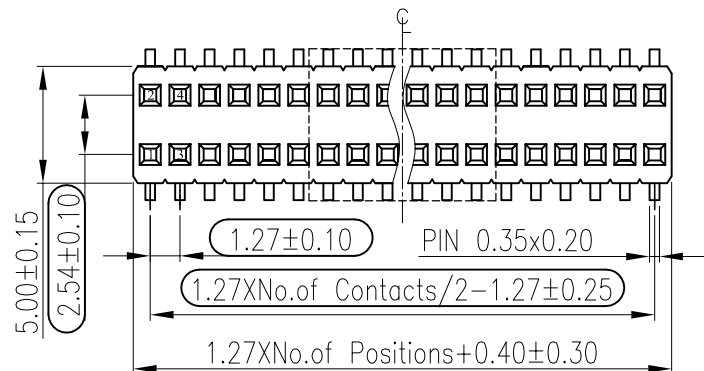
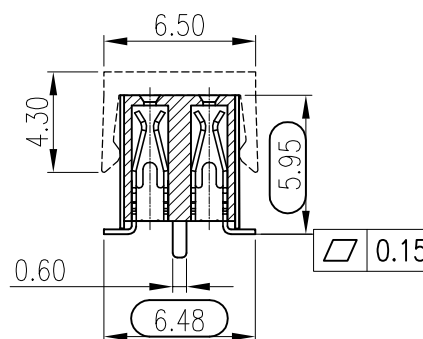


W/O PEG

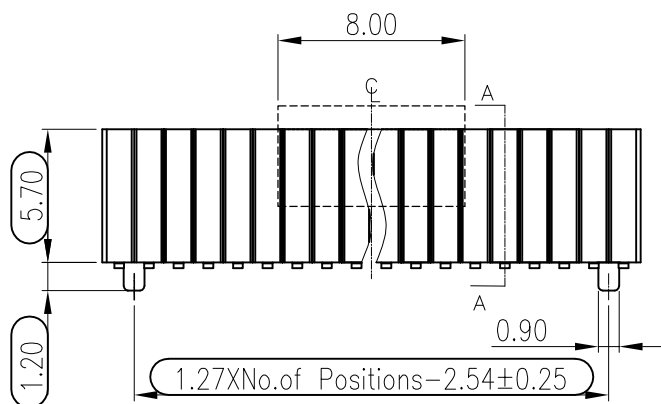

W/PEG
SECTION A-A

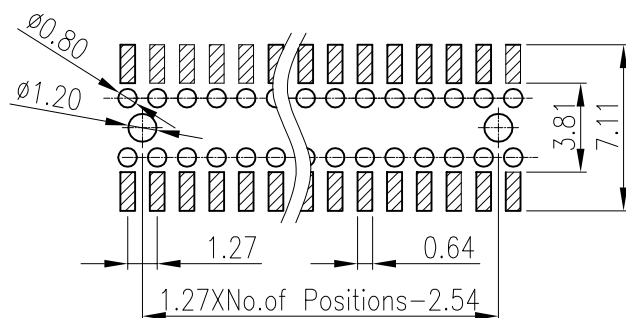

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+30%GF UL94V-0

PART NO.

711 D E XX K X H 1 01 X X 3
1 2 3 4 5 6 7 8 9 10 11 12

- | | |
|---|--|
| 1.SERIES NO. | 7.ROW TYPE: |
| 2.TYPE:
D=SMT | H=Dual Row |
| 3.GREEN OPTION:
E=RoHS(Bright) | 8.CONTACT OPTION:
1=Straight(Y Contact) |
| 4.CONTACT NO:
02~50 | 9.CONTACT LENGTH:
01=01 Type |
| 5.CONTACT TYPE(MATERIAL):
K=Female(PA9T) | 10.PROCESS OPTION:
0=W/O PAD,W/O Peg
1=W/PAD,W/O Peg
2=W/O PAD,W/Peg
3=W/PAD,W/Peg |
| 6.CONTACT PLATING:
G=Gold Flash | 11.PACKAGE OPTION:
B=TUBE
C=TAPE REL |
| | 12.INSULATOR COLOR:
3=Black |

POSITION	B	B1	C
H101	5.70	5.95	6.48

UNLESS OTHERWISE SPECIFIED TOLERANCE Angle ± 3° .0 ±0.40 .00 ±0.25 .000 ±0.15		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
SCALE: AS SHOWN	UNIT: mm		
DRAWN PEARL	03/18/14	DRAWN NAME: Female Header SMT Straight Type (Pitch:1.27*2.54mm)	
CHECKED	/ /	PRODUCT NO. 711DEXKKXH101XX3	
APPROVED	/ /	FILE NAME: 711DEXKKXH101XX3(W01)	

REV.	DESCRIPTION	DATE	SIZE A4	REV. X1
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				