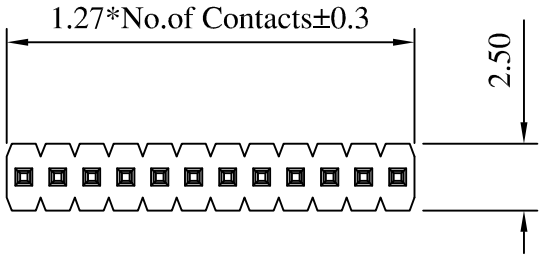



Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Copper Alloy
Standard: Brass
Insulator Material: High Temperature
Plastic,UL 94V-0

Finish: Standard: Gold Flash all over

PART NO.

714	A	E	XX	X	X	E	S	02	A	D	3
1	2	3	4	5	6	7	8	9	10	11	12

1.SERIES NO.
2.TYPE: A=Standard
3.GREEN OPTION:
E=RoHS(Bright)
4.CONTACT NUMBER:
02~50
5.CONTACT TYPE:
R=Male(PA6T)
N=Male(PA9T)
6.CONTACT AREA PLATING:
G=Gold Flash
7.ROW TYPE:
E=Single Row
8.CONTACT OPTION:
S=Straight
9.CONTACT LENGTH:
02=02 TYPE
10.CONTACT OPTION:
A=Fully Loaded
11.PACKAGE OPTION:
D=Bag
12.INSULATOR COLOR:
3=Black

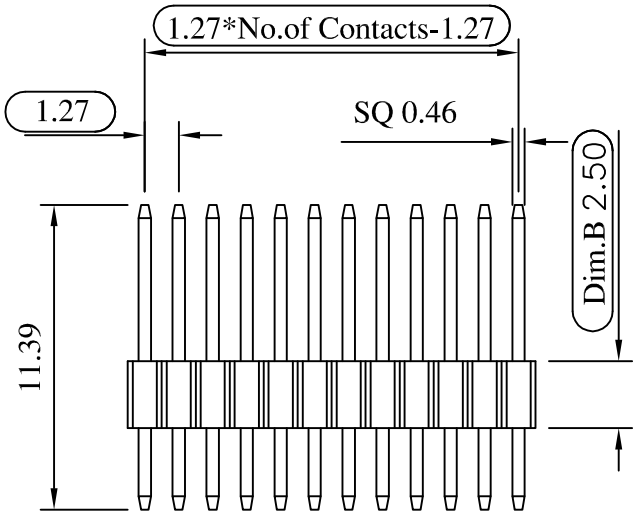

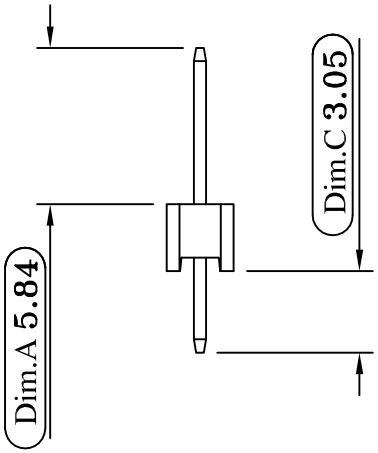

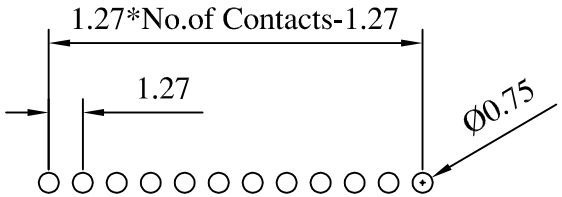

Recommended P.C. Board
Hole Layout

For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE			
.0	±0.30		
.00	±0.20		
SCALE: AS SHOWN	UNIT: mm		
DRAWN PEARL	05/25/2016		
CHECKED	/ /		
APPROVED	/ /		
SIZE A4	REV. X1		

CHANT SINCERE CO.,LTD
TEL: 886-02-86471251 FAX: 886-02-86472962

DRAWN NAME: PIN HEADER (PITCH: 1.27*1.27mm)
PRODUCT NO. 714AEXXXXES02AD3
FILE NAME: 714AEXXXXES02AD3(C6)

REV.	DESCRIPTION	DATE