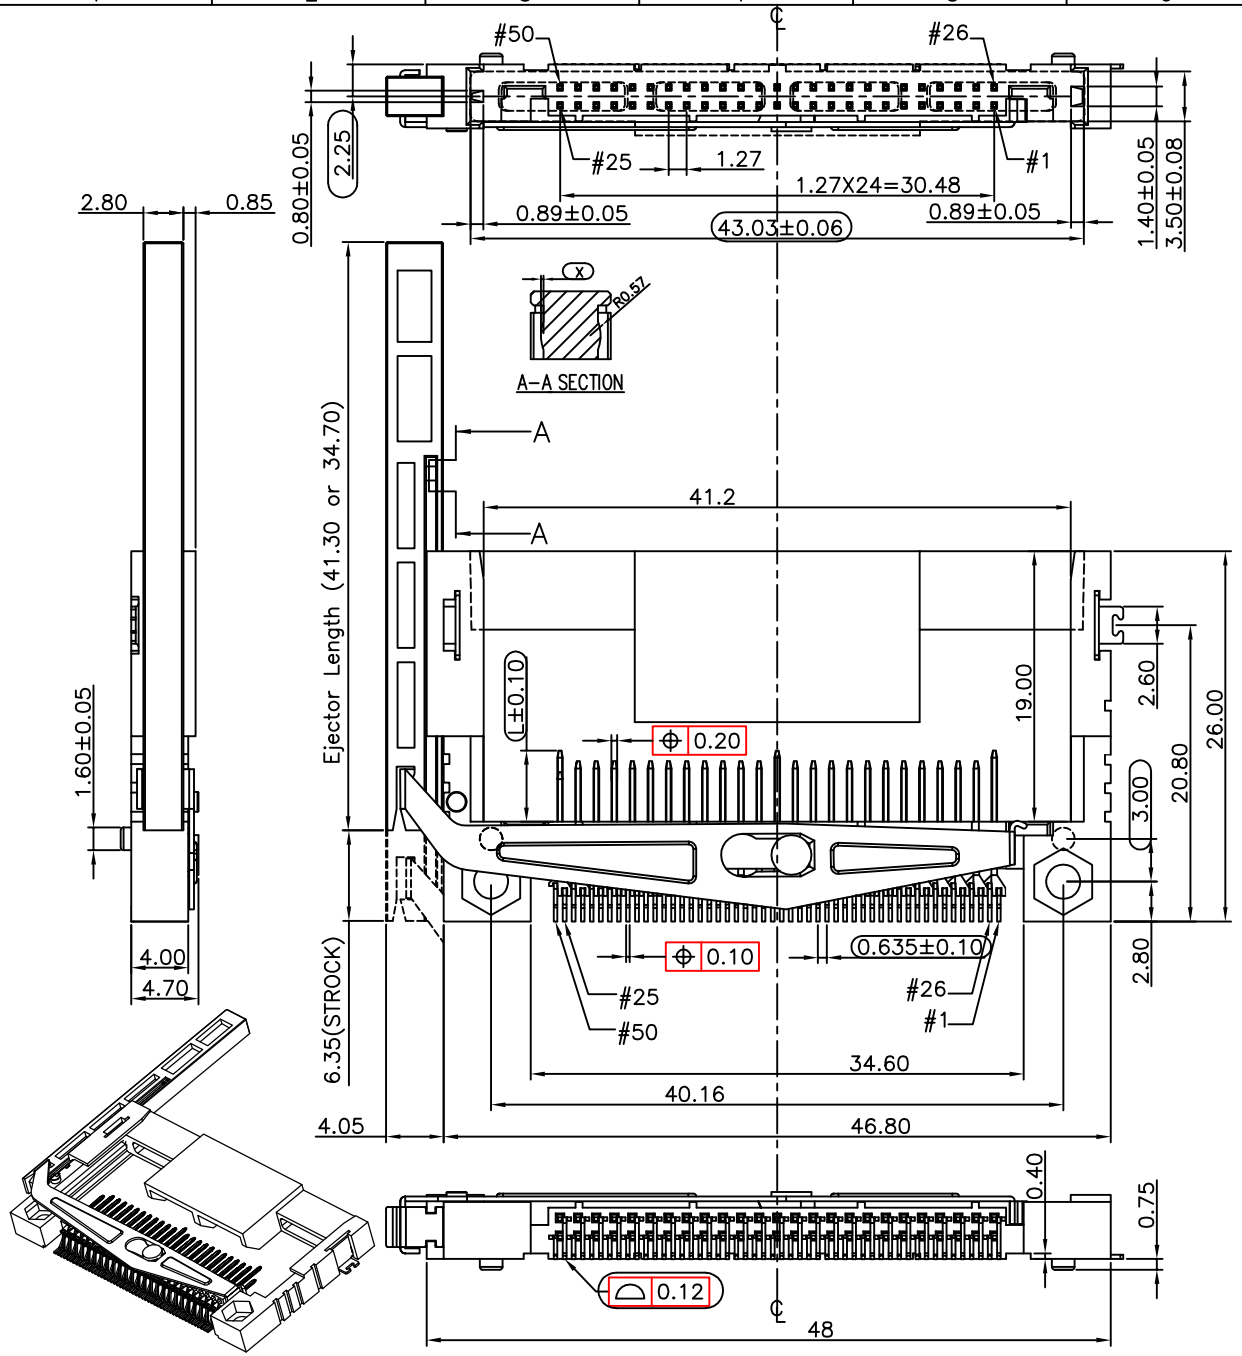

SPECIFICATION
MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Pivot Shell: Stainless Steel
Mount Ear: Copper Alloy
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact Area: 1u"~30u" Selective Gold
Solder Tails Area: 100u"~200u" Tin(Lead Free)
PART NO.

752	D02	X	50	X	X	D	0	0	P
1	2	3	4	5	6	7	8	9	10

1.SERIES NO. 752=C.F.A.
2.TYPE: D02=SMT(Slim Type)
3.ENVIRONMENT PROTECTION MATERIAL:
F=RoHS(Matte Tin)
4.CONTACT NUMBER:
50 Pin
5.CONTACT AREA PLATING:
C=15u" Gold (Selective)
6.PIVOT SHELL & EJECTOR:
R=W/Straight Ejector(Right side,L=41.30)
(X=0.15±0.12)
7.CARD KEY ORIENTATION STYLE
D=STANDARD(板上型)(預成型端子)
8.STAND OFF DISTANCE:
0=0 mm
9.PARTS OPTION:
0=Without Nuts
10.INSULATOR:
P=白色+PICKPAD

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Dim. L	Pin No.

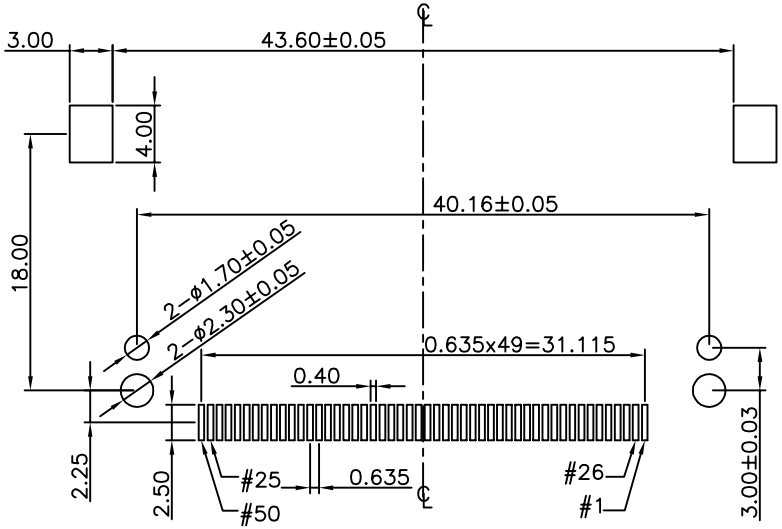

RECOMMENDED P.C.B LAYOUT
TOLERANCES: ±0.05mm

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
.0 ±0.5
.0 ±0.3
.00 ±0.2

CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN PEARL	02/18/08
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: CFA SLIM TYPE 2 (STANDARD) SLOT HEADER (STANDOFF 0 mm)
PRODUCT NO. 752D02X50XXD00P
SIZE A4 REV. B
FILE NAME: 752D02K50XRD00P(GA)

REV.	DESCRIPTION	DATE