


RoHS
compliant

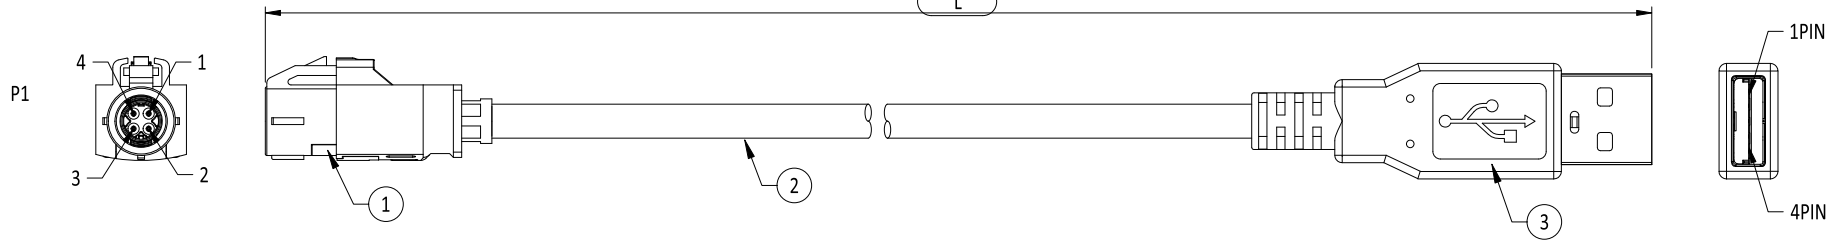

PIN OUT	
HSD Z CODE	USB 2.0 AM
1	ORANGE 3
2	BROWN 1
3	GREEN 2
4	BLUE 4
SHIELD	SHELL


SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. FINISHED CABLE 100% CONDUCTIVITY TEST
2. CONTACT RESISTANCE: 5 Q(MAX.)
3. INSULATION RESISTANCE: 2 MΩ(MIN.)
4. HI-POT TEST: DC 300V/ 0.1 S

ENVIRONMENTAL :
1. OPERATING TEMPERATURE RANGE: -40°C TO +85°C

PACKING STYLE:
1. BAG

3	USB	USB 2.0 A TYPE, G/F	1
2	CABLE	USB CABLE OD: 4.5mm	A/R
1	HSD JACK	PBT, UL94V-0; 6u" Au	1
ITEM	PART	DESCRIPTION	Q'TY

		A	ECN-2308074(SYLVA)NEW DWG	31AUG2023	
ZONE	REVISION	DESCRIPTION		DATE	

1	1430101001Z	1000±30mm	W/O LOGO	Z CODE			
ITEM	NEW P/N	L (LENGTH)	LOGO	CODING	NOTE		
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.50 0. ±0.30 .00 ±0.20			 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD			
SCALE: 1:1		UNIT: mm					
DRAWN: SUNNY_LIU			04 09 2023		TITLE: HSD JACK TO USB 2.0 A TYPE MALE CABLE		
CHECKED: WEIWEI_CHANG			04 09 2023				
APPROVED: JASON_HUANG			06 09 2023				
			SIZE A4	SHEET 1/2	REV. A	PART NO. 1430101XXXX	C
7			8		9		10

RoHS
compliant



A	B	C	D	E	F	Z
BLACK SIM. 9005	WHITE SIM. 9001	BLUE SIM. 5005	BORDEAUX VIOLET SIM. 4004	GREEN SIM. 6002	BROWN SIM. 8011	WATER BLUE SIM. 5021

UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP		 CHANT SINCERE CO.,LTD	
ANG.	±5°	 Cmk Cpk			
0.	±0.50				
.0	±0.30				
.00	±0.20				
SCALE: 1:1		UNIT: mm			
DRAWN: SUNNY_LIU		04 09 2023		TITLE:	
CHECKED: WEIWEI_CHANG		04 09 2023		HSD JACK TO USB 2.0 A TYPE MALE CABLE	
APPROVED: JASON_HUANG		06 09 2023		PART NO.	C
		SIZE A4	SHEET 2/2	REV. A	
7		8		9	10

	A	ECN-2308074(SYLVIA)NEW DWG			31AUG2023
ZONE	REVISION	DESCRIPTION			DATE
1	2	3	4	5	6