



RoHS
compliant

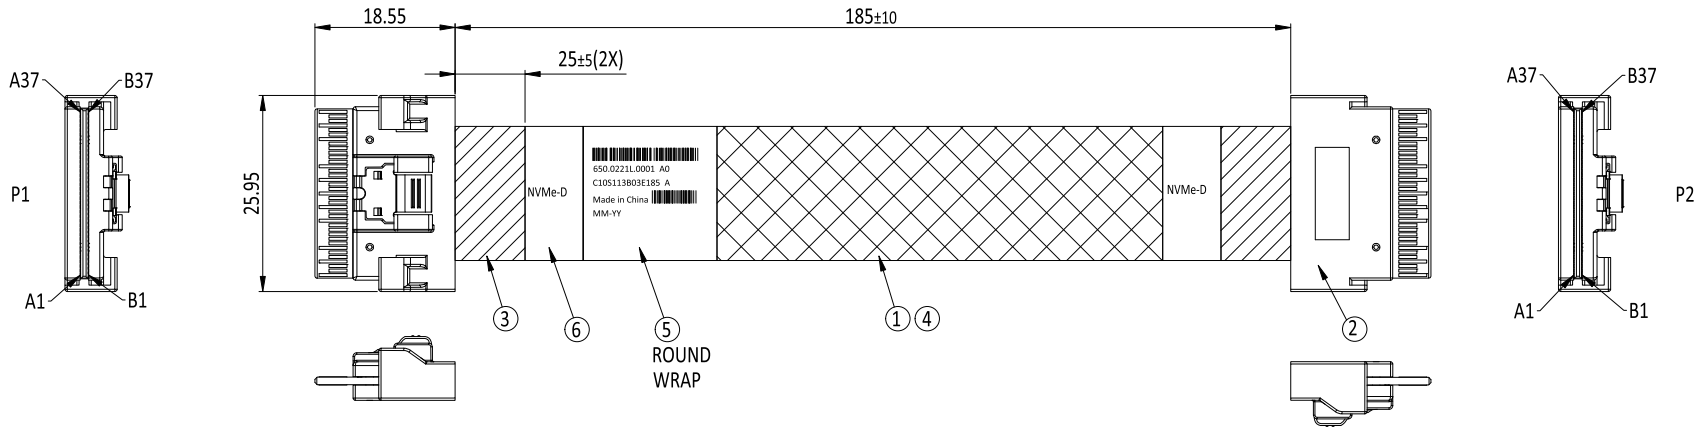

NOTE:
1. THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA: 85±15% Ω, CABLE ABSOLUTE AREA: 85±10% Ω
該產品滿足下面阻抗特性: 接觸區域85±15%歐姆, 線材為85±10%歐姆
2. ELECTRICAL AND MCEHANICL PERFORMANCE SHALL MEET THE PCIE GEN4.0 INDUSTRIAL STANDARD
電氣特性遵循PCIE GEN4.0工業標準

6	LABEL: SYNTHETIC PAPER, WHITE		2
5	LABEL: SYNTHETIC PAPER, WHITE		1
4	EXPANDO TUB, BLACK		A/R
3	ACETATE TAPE, BLACK		A/R
2	SLIMSAS 8X STR PLUG, AU 30u"		2
1	SAS CABLE: UL20744 #30(2C+2D+AM), SILVER PLATED, 85Ω, 24G, BLUE		A/R
ITEM	DESCRIPTION	Q'TY	

A		C	ECN-2411075(KITA)NEW P/N	20NOV2024
		B	ECN-2204049(JASON)SEE PAGE 2/2	22APR2023
		A	ECN-2112021(VICKY)X10 CHANGE TO A	07DEC2021
	ZONE	REVISION	DESCRIPTION	DATE

2					
1	15101070010	C10S113B03E185			
ITEM	NEW P/N	OLD P/N	NOTE		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD		
ANG. ±2°		 Cmk			
0 ±0.50		Cpk			
0 ±0.30					
.00 ±0.20					
SCALE:	AS SHOWN	UNIT: mm			
DRAWN:	XINGRU_LAI	20 Nov 2024	TITLE: PDR-18101 SLIMSAS 8X TO 8X STR CABLE		
CHECKED:	PEARL_HUNG	20 Nov 2024			
APPROVED:	PEARL_HUNG	20 Nov 2024	PART NO. 15101070010	C	
	SIZE A4	SHEET 1/2	REV. C	CODE: p09	CUSTOMER:

RoHS
compliant



WIRE DIAGRAM



WIRE DIAGRAM

P1

P2

P1

P2

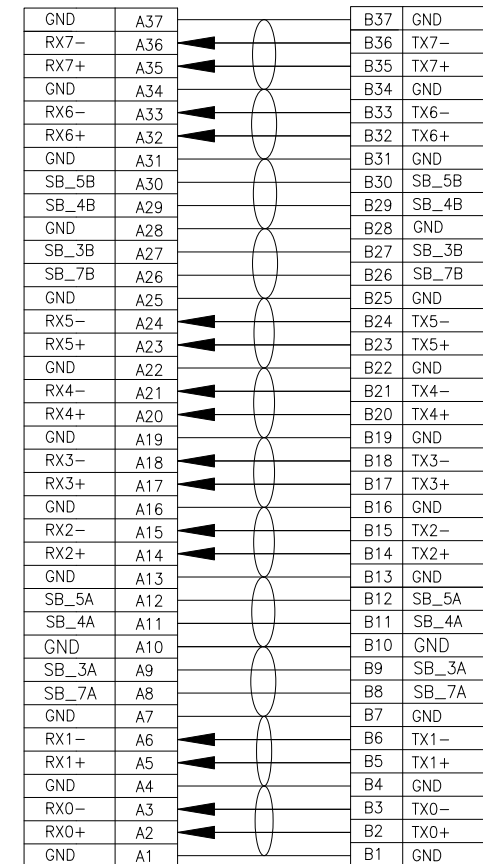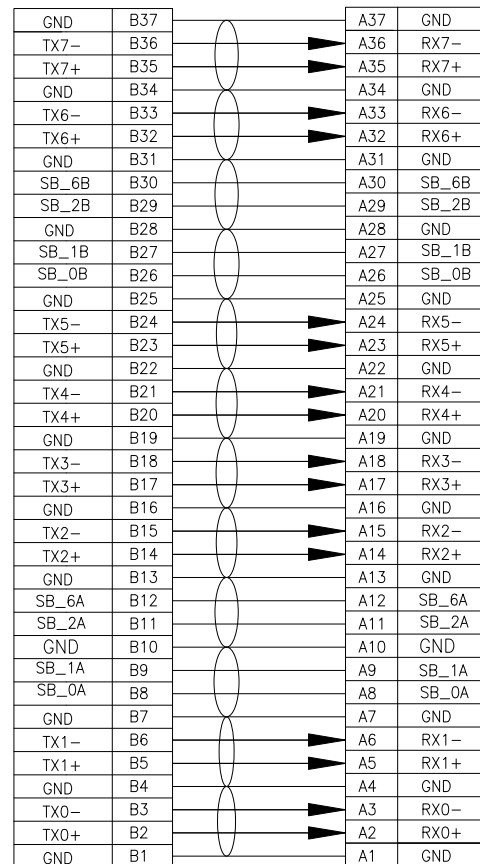

LABEL DETAIL

READING: 650.0221L.0001 A0
CODE 128
WISTRON PN
COXOC PN & Rev. Δ B
READING: MADE IN CHINA
CODE 128
DATE CODE

TEXT FONT: ARIAL
TEXT HEIGHT: 3mm MIN
BARCODE HEIGHT: 3.175MM
字體: ARIAL
字高: 3mm MIN
條形碼高度: 3.175mm



UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Cmk Cpk	 CHANT SINCERE CO., LTD
ANG.	$\pm 2^\circ$		
0.	± 0.50	SCALE: AS SHOWN	UNIT: mm
.0	± 0.30		
.00	± 0.20	DRAWN: XINGRU_LAI	20 Nov 2024
CHECKED: PEARL_HUNG		20 Nov 2024	
APPROVED: PEARL_HUNG		20 Nov 2024	
		REV. C	
SIZE A4		SHEET 2/2	
CODE: p09		CUSTOMER:	

	C	ECN-2411075(KITA)NEW P/N	20NOV2024
E3	B	ECN-2204049(JASON)SEE PAGE 2/2	22APR2023
	A	ECN-2112021(VICKY)X10 CHANGE TO A	07DEC2021
ZONE	REVISION	DESCRIPTION	DATE