
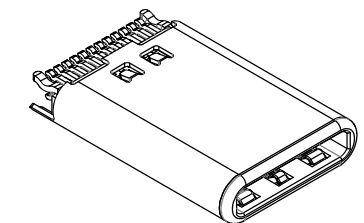




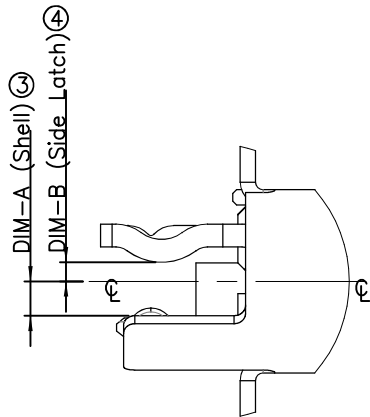
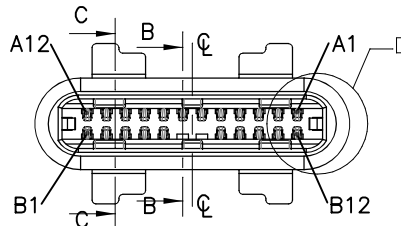
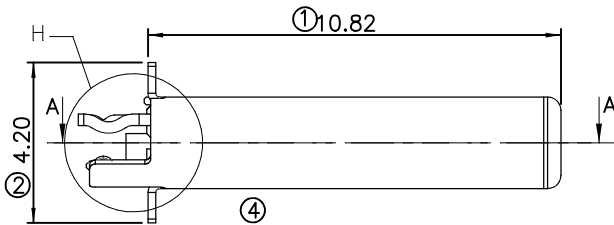
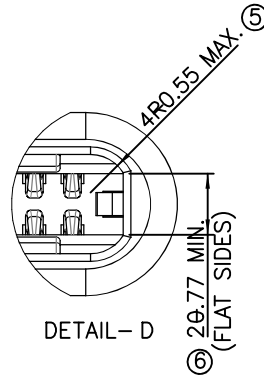


SPECIFICATION
MATERIAL
 Insulator: Thermoplastic,Black
 Contacts: Copper Alloy
 Shell: Stainless Steel
CONTACT PLATING
 Underplate: 60u"~150u" Nickel
 Contact area: 30u"Pd Ni+2u" Selective gold,
 Solder tails area: 80u"~150u" Tin (Lead Free)
ELECTRICAL
 Operation voltage: 20 V
 Current rating: 5 Amps max.
 Insulation resistance: 100 Mohms min @ 100 VDC
 Dielectric withstanding voltage: 100 VAC / minute
 Temperature range: -40°C TO +105°C
 Mating cycles: 10,000 insertions
 Part no.

317 C D 2X X Z T F2 X X X X
 1 2 3 4 5 6 7 8 9 10 11 12

- 1.SERIES NO. 317=USB Series
- 2.C=Straddle Type
- 3.GREEN OPTION: D=RoHS2 (Matte)(Halogen Free)
- 4.CONTACT NUMBER: 24=24 PINS
- 5.CONTACT TYPE: A=MALE (LCP)(C2680)
- 6.CONTACT AREA PLATING: Z=30u"Pd Ni+2u"GOLD
- 7.SOLDER TAILS AREA PLATING: T=80u"~150u" TIN (Lead Free)
- 8.APPLY TYPE: F2=Cable Plug
- 9.SHELL PLATING: N=Ni (For 24 Pins)
- 10.A=PCB 0.8mm
- 11.PACKING STYLE: 1=TRAY+Cap
- 12.INSULATOR COLOR: 3=BLACK

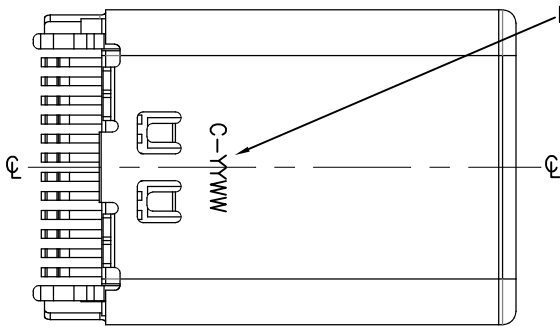

* Be prohibited IR-Reflow process if there is without cap.

	STANDARD	PEN DRIVER
DIM-A	0.45mm	0.30mm
DIM-B	0.35mm	0.25mm

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±2
0.	±0.50
.0	±0.30
.00	±0.20

SCALE: AS SHOWN	UNIT: mm
DRAWN Jerry	01/03/2018
CHECKED	
APPROVED	

CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
DRAWN NAME: USB TYPE C Plug 1/3	
PRODUCT NO. 317CD2XXZTF2XXXX	
FILE NAME: C-317CD2XXZTF2XXXX	

For SIP
 For CmK/Cpk

DETAIL-H

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	H	C-317CD2XXZTF2XXXX