



SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic
 Contacts: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~15u" Selective Gold
ELECTRICAL
 Operation Voltage: 250 VAC Max.
 Current Rating: 1 Amps Max.
 Contact Resistance: 100 mohms Max.
 Insulation Resistance: 1000 Mohms Min. @ 500 VDC
 Dielectric Withstanding Voltage: 500 VAC / minute
 Temperature Range: -25°C To +85°C
PART NO.

461 SA5 X 08 X X 1 0 X 3
 1 2 3 4 5 6 7 8 9 10

- 1.SERIES NO.
461= Adapter Series
- 2.TYPE:
SA5=TransFlash to SD Adapter
- 3.GREEN OPTION:
E=RoHS
- 4.CONTACT NUMBER:
08=08 Position
- 5.CONTACT TYPE:
V=TYPE 1(上蓋有缺口)
W/O Lock Pin
- 6.CONTACT AREA PLATING:
S=Gold Flash (Selective)
- 7.Lable Area Option:
1=Without Label Area
- 8.LOGO OPTION:
0=W/O Logo
- 9.PACKING/SWITCH COLCOR:
0=Tray/Switch Gray
- 10.INSULATOR:
3=Black

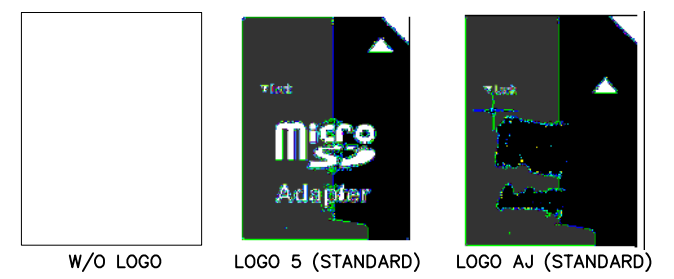

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
General Tolerance ±0.15			
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME: TransFlash Adapter	
DRAWN Vicky	04/09/14'	PRODUCT NO. 461SA5X08PX1XX3	
CHECKED	/ /	FILE NAME: C-461SA5J08PX1003(GA)	
APPROVED	/ /		
REV.	SCALE A4	REV. P	

REV.	DESCRIPTION	DATE