






RoHS
compliant




SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: THERMOPLASTIC, RATED UL94V-0, BLACK
2. CONTACTS: COPPER ALLOY
GOLD FINGER PLATING: UNDERPLATE: 50u"~150u" NI
CONTACT AREA: 3u" AU

ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 0.5 AMPS MAX.
2. INSULATION RESISTANCE: 1000 MΩ MIN @ 500 VDC
3. DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC / MINUTE
4. MATING CYCLES: 10,000 INSERTIONS

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

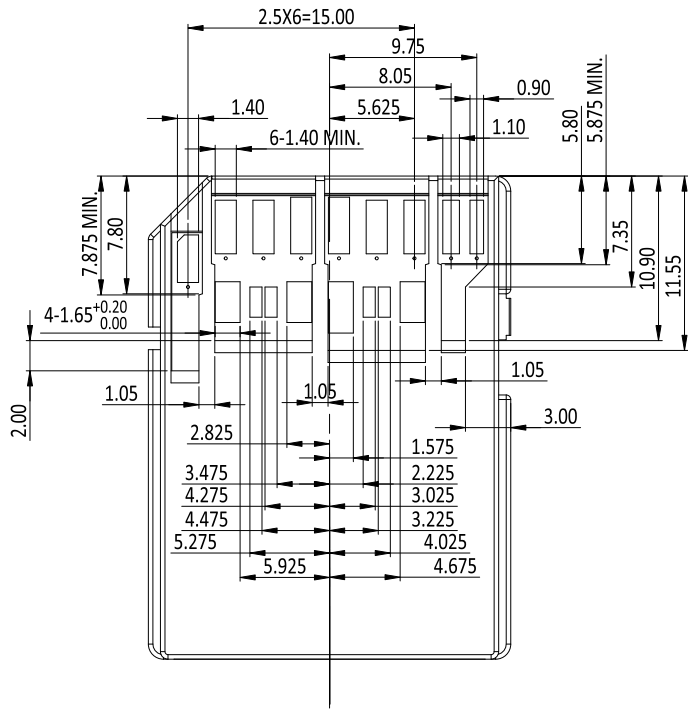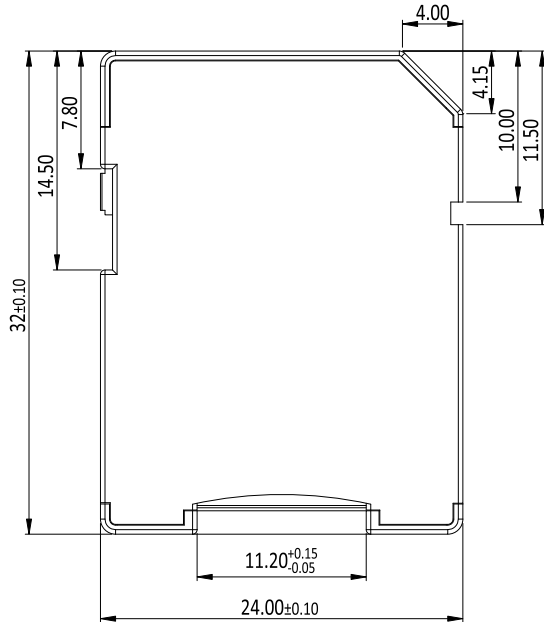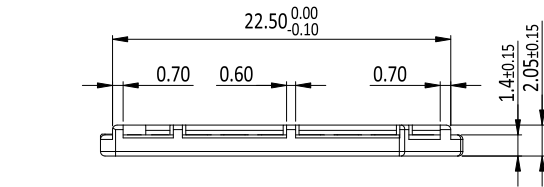

2						
1	76161010010	461SF16PSNS1A003	1u" AU/MATTE SN	TRAY/SWITCH GRAY		
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PACKING STYLE		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD			
ANG. ±5°						
0. ±0.5						
.0 ±0.3						
.00 ±0.2						
SCALE: AS SHOWN		UNIT: mm	TITLE: PDR-15013 MICRO SD TO SD ADAPTER (FOR UHS-II) FOR PRINT			
DRAWN: XINGRU_LAI		10 Apr 2024				
CHECKED: PEARL_HUNG		25 Apr 2024				
APPROVED: PEARL_HUNG		25 Apr 2024				
		SIZE A4	SHEET 1/1	REV. B	PART NO. 76161010010	C
7		8		9		10

	B	ECN-2402040(JOLIN)NEW P/N	20FEB2024
	A	ECN-1509046(JIM) X1 CHANGE A	30SEP2015
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		