

RoHS
compliant






SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: THERMAL PLASTIC, BLACK
2. CONTACTS: COPPER ALLOY
3. CONTACT PLATING
 UNDERPLATE: 50~100u" NI
 CONTACT AREA: 1~15u" SELECTIVE AU

ELECTRICAL CHARACTERISTIC:
1. OPERATION VOLTAGE: 250 V AC MAX.
2. CURRENT RATING: 1 A MAX.
3. CONTACT RESISTANCE: 100 mΩ MAX.
4. INSULATION RESISTANCE: 1000 MΩ MIN. @ 500 V DC
5. DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC / MINUTE

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

PACKING STYLE:
1. TRAY

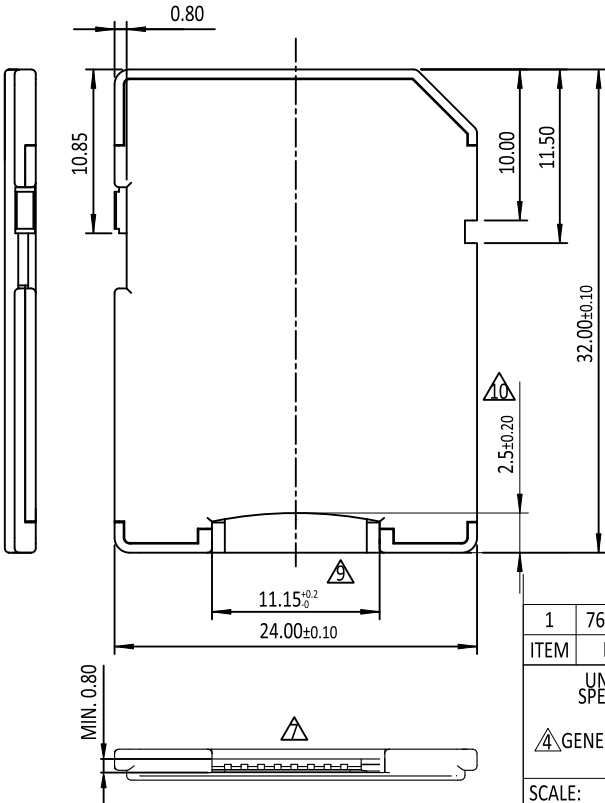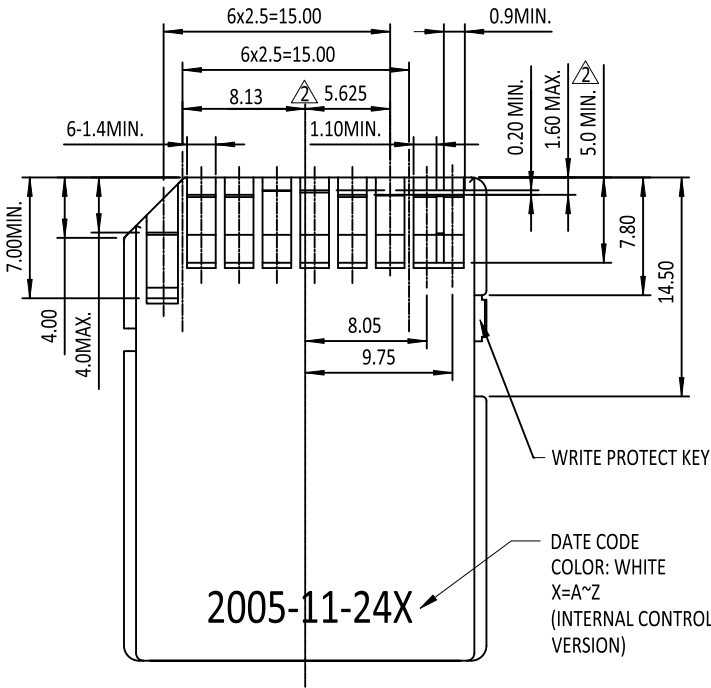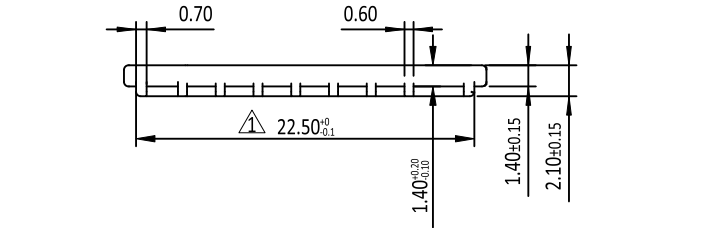

2005-11-24X
日
月
年

1	76161020010	461SA5E08VS1003	GOLD FLASH (SELECTIVE)	GRAY	W/O DATE CODE
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	SWITCH COLCOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE  GENERAL TOLERANCE ±0.15			 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN			UNIT: mm		
DRAWN: HOLLY_TU			22 Apr 2024	TITLE: PDR- TRANSFLASH ADAPTER	
CHECKED: PEARL_HUNG			22 Apr 2024		
APPROVED: PEARL_HUNG			22 Apr 2024	PART NO. 7616102XXXX	
 SIZE A4			SHEET 1/1	REV. Q	CODE: GA
					CUSTOMER:

	Q	ECN-2404034(JOLIN)ADD NEW P/N	10APR2024
E9	P	ECN-1504010(CHERRY) (9,E)	09APR2014
D8	O	ECN-1410023(TENY) (8,D)	17OCT2014
ZONE	REVISION	DESCRIPTION	DATE