

NOTE:
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.
 3.USB CABLE ELECTRIC TEST:
 A.VOLTAGE: 300V DC.
 B.CONTACT RESISTENCE: 5 Ohm Max.
 C.INSULATION RESISTENCE:2M Ohm Min.

PART NO. _____
 SERIES NO. _____
 C8=USB TYPE
 CONNECTOR OPTION _____
 F4=USB 3.1/MICRO USB 2.0
 CONNECTOR TYPE _____
 L=CM/BM _____
 LENGTH NO. _____
 1M0=1000 mm
 GREEN OPTION _____
 E=RoHS TYPE.
 A01=Rd 5.1K ohm
 CABLE COLOR _____
 3=BLACK

P1					P2	
USB C PLUG		WIRE			USB2.0 Micro USBM	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	Wire COLOR & AWG	PIN	SIGNAL NAME
A1,B1,A12,,B12	GND	1	GND_PWRrt1	BLACK	5	GND
A4,B4,A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS
A5	CC	W/RESISTOR				
B5	VCONN	N/A				
A6	Dp1	3	UTP_Dp	GREEN	3	D+
A7	Dn1	4	UTP_Dn	WHITE	2	D-
				N/A	4	ID
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD

8	Over Mold	PVC COLOR BLACK
7	INNER Mold	PE
6	FOIL	COPPER FOIL
5	TIN	TIN STICK, TIN WIRE
4	PCBA	PCBA, W/Resistor(Rd 5.1K ohm)
3	CONN#2	USB 2.0 MICRO USB M,BLACK INSULATOR, CONTACT PLATING: Au 30u' SHELL PLATED NICKEL,(W/TIN PLATE)
2	CONN#1	USB C PLUG,BLACK INSULATOR,CONTACT PLATING: Pd-Ni 30u'+Gold 2u' SHELL PLATED NICKEL,(W/TIN PLATE)
1	CABLE	USB 2.0 UL2725 28/24 ADB DD:4.0mm, BLACK PVC JACKET
NO.	TITLE	DESCRIPTION

For SIP
 For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±
 0. ±1
 .0 ±0.5
 .00 ±0.25


SCALE: AS SHOWN UNIT: mm

DRAWN Vicky 08/18/2016
 CHECKED JKC 08/18/2016
 APPROVED / /


SIZE A4 REV. AX1

CHANT SINCERE CO.,LTD
 TEL:886-02-86471251 FAX:886-02-86472962
 DRAWN NAME: (PDR-14093)
 USB C PLUG to 2.0 MICRO USB M CABLE 1/2
 PRODUCT NO: C8F4L3A01E1M0
 FILE NAME: C-C8F4L3A01E1M0(GB)


REV.	DESCRIPTION	DATE	SIZE	REV. AX1	FILE NAME: C-C8F4L3A01E1M0(GB)
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

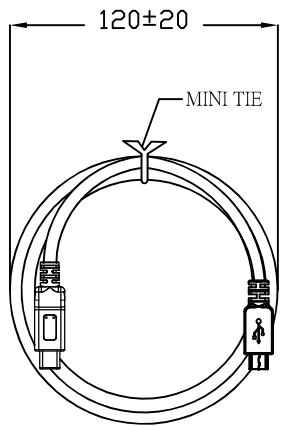


USB C/Micro USB 2.0 CABLE

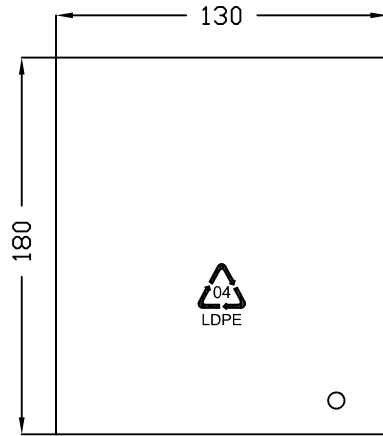


PE BAG:L180*W130*T0.05mm

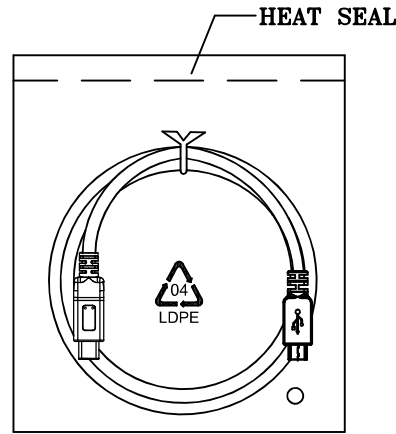


1PCS CABLE/PE BAG

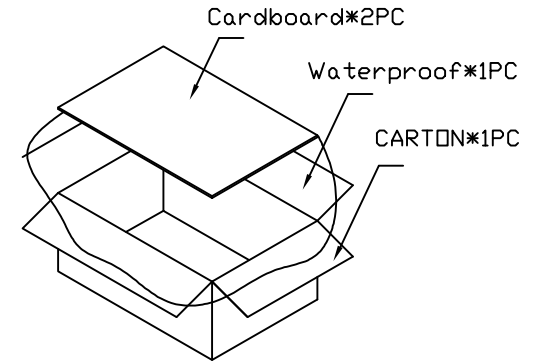

(CARTON:L457*W298*H228mm Material K=K)

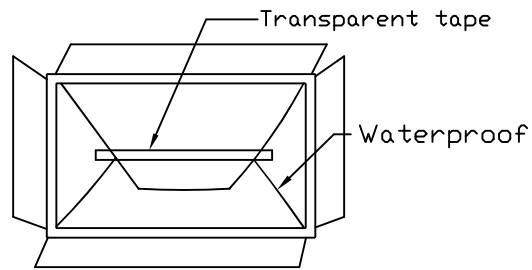

(After the installed Product, carton sealing tape should be transparent)

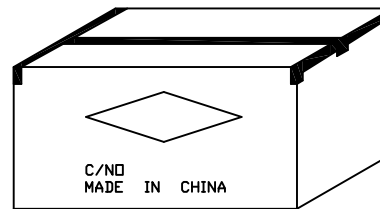

(CARTON:L457*W298*H228mm,Material K=K)
(200PCS CABLE/CARTON)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W.:	KGS
G.W.:	KGS
MEAS:	1.1'

(CARTON SIDE)

- For SIP
- For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	± 1	
0.	± 0.5	CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
.00	± 0.25	
SCALE: AS SHOWN	UNIT: mm	DRAWN NAME: (PDR-14093)
DRAWN Vicky	08/18/16	USB C PLUG to 2.0 MICRO USB M CABLE
CHECKED Jackyc	08/18/16	2/2
APPROVED	/ /	PRODUCT NO: C8F4L3A01E1M0
REV.	AXI	FILE NAME: C-C8F4L3A01E1M0(GB)

REV.	DESCRIPTION	DATE	SIZE	A4	REV.	AXI	FILE NAME:	C-C8F4L3A01E1M0(GB)
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								