



P1



USB C PLUG



6.55Min


(33)

(1000±50)



(26.7)

6.8Min

P2



USB2.0 MINI USB M



NOTE:  
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.  
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.  
 3.USB CABLE ELECTRIC TEST:  
 A.VOLTAGE: 300V DC.  
 B.CONTACT RESISTENCE: 5 Ohm Max.  
 C.INSULATION RESISTENCE:2M Ohm Min.

PART NO.

SERIES NO.

C8=USB TYPE  
 CONNECTOR OPTION  
 F6=USB 3.1/MINI USB 2.0  
 CONNECTOR TYPE  
 L=CM/BM

C8 F6 L 3 A01 E 1M0

LENGTH NO.  
 1M0=1000 mm  
 GREEN OPTION  
 E=RoHS  
 TYPE.  
 A01=Rd 5.1K ohm  
 CABLE COLOR  
 3=BLACK


P1					P2		
USB C PLUG		WIRE			USB2.0 Mini USBM		
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	Wire COLOR & AWG	PIN	SIGNAL NAME	
A1,B1,A12,,B12	GND	1	GND_PWRrt1	BLACK	5	GND	
A4,B4,A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS	
A5	CC	W/RESISTOR					
B5	CC	N/A					
A6	Dp1	3	UTP_Dp	GREEN	3	D+	
A7	Dn1	4	UTP_Dn	WHITE	2	D-	
					N/A	4	ID
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD	

NO.	TITLE	DESCRIPTION
8	Over Mold	PVC COLOR BLACK
7	INNER Mold	PE
6	FOIL	COPPER FOIL
5	TIN	TIN STICK, TIN WIRE
4	PCBA	PCBA, W/Resistor(Rd 5.1K ohm)
3	CONN#2	USB2.0 MINI USB M,BLACK INSULATOR, CONTACT PLATING: Au 30u' SHELL PLATED NICKEL,(W/TIN PLATE)
2	CONN#1	USB C PLUG,BLACK INSULATOR,CONTACT PLATING: Pd-Ni 30u'+Gold 2u' SHELL PLATED NICKEL,(W/TIN PLATE)
1	CABLE	USB2.0 UL2725 28/24 ADB DD:4.0mm, BLACK PVC JACKET


○ For SIP  
 (ST) For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±	
0.	±1	<b>CHANT SINCERE CO.,LTD</b> TEL:886-02-86471251 FAX:886-02-86472962
.0	±0.5	
.00	±0.25	
SCALE: AS SHOWN	UNIT: mm	
DRAWN Vicky	08/18/2016	DRAWN NAME:
CHECKED JKC	08/18/2016	USB C PLUG to 2.0 Mini USB CABLE 1/2
APPROVED	/ /	PRODUCT NO: C8F6L3A01E1M0
REV. X3	SIZE A4	FILE NAME: C-C8F6L3A01E1M0(GB)


REV.	DESCRIPTION	DATE	SIZE	REV. X3
1			A4	

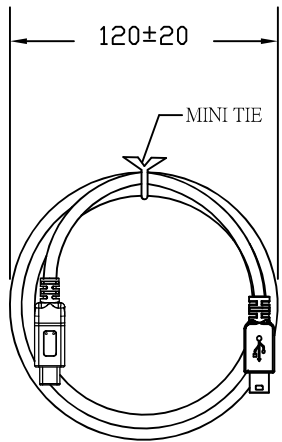


USB C/Mini USB 2.0 CABLE

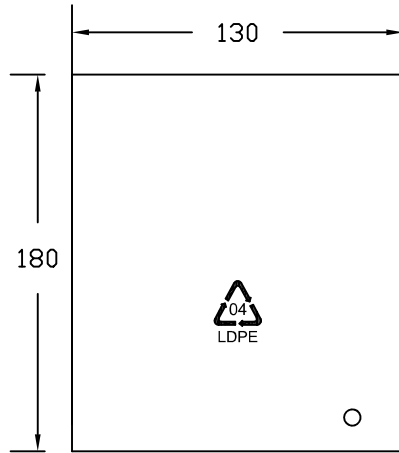


PE BAG:L180\*W130\*T0.05mm

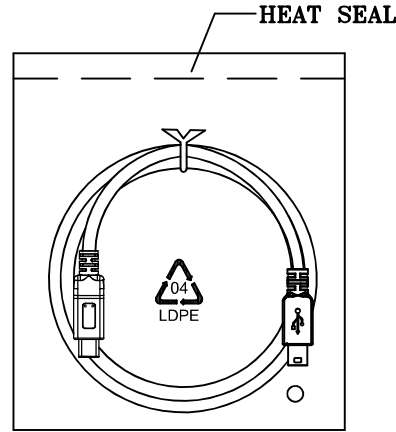


1PCS CABLE/PE BAG

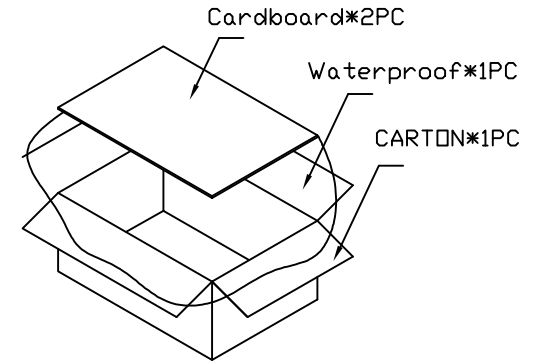

(CARTON:L457\*W298\*H228mm Material K=K)

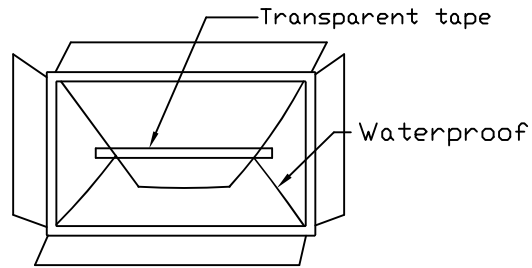

(After the installed Product, carton sealing tape should be transparent)

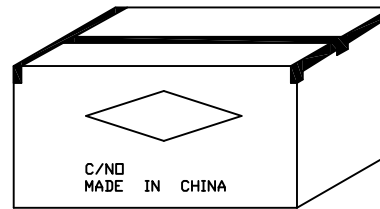

(CARTON:L457\*W298\*H228mm,Material K=K)  
(200PCS CABLE/CARTON)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W.:	KGS
G.W.:	KGS
MEAS:	1.1'

(CARTON SIDE)

- For SIP
- For CmK/Cpk

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±		
0.	±1	<b>CHANT SINCERE CO.,LTD</b> TEL:886-02-86471251 FAX:886-02-86472962	
.0	±0.5		
.00	±0.25		
SCALE: AS SHOWN	UNIT: mm		
DRAWN Vicky	08/18/2016	DRAWN NAME:	
CHECKED Jackyc	08/18/2016	USB C PLUG to 2.0 Mini USB CABLE 2/2	
APPROVED	/ /	PRODUCT NO: C8F6L3A01E1M0	
REV.	DESCRIPTION	DATE	SIZE A4 REV. X3 FILE NAME: C-C8F6L3A01E1M0(GB)